




LOC	DIST	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APP
G	14		G	REVISED PER	0720-0230-93		

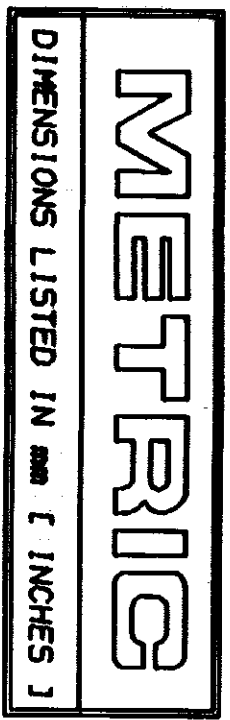

AMP WIRE RANGE 22-16 AWG STRAINED	UL E13288 Listed 22-16 AWG STRAINED
● LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

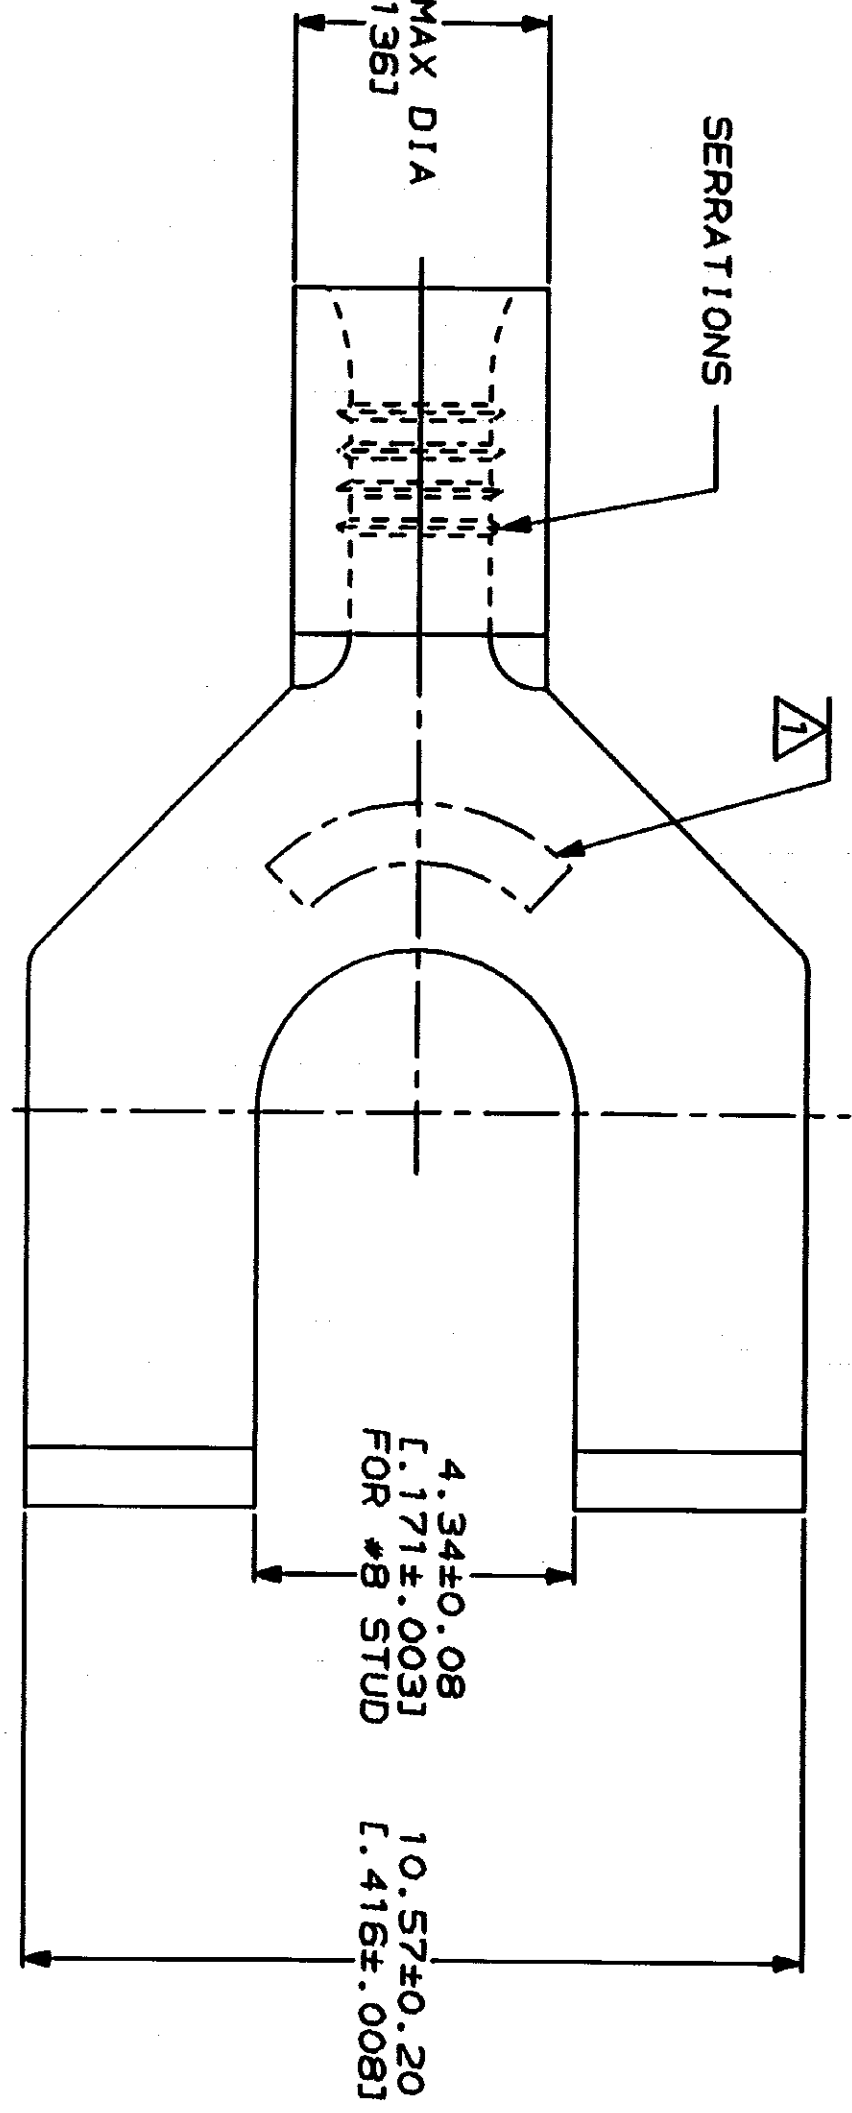

⚠ STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

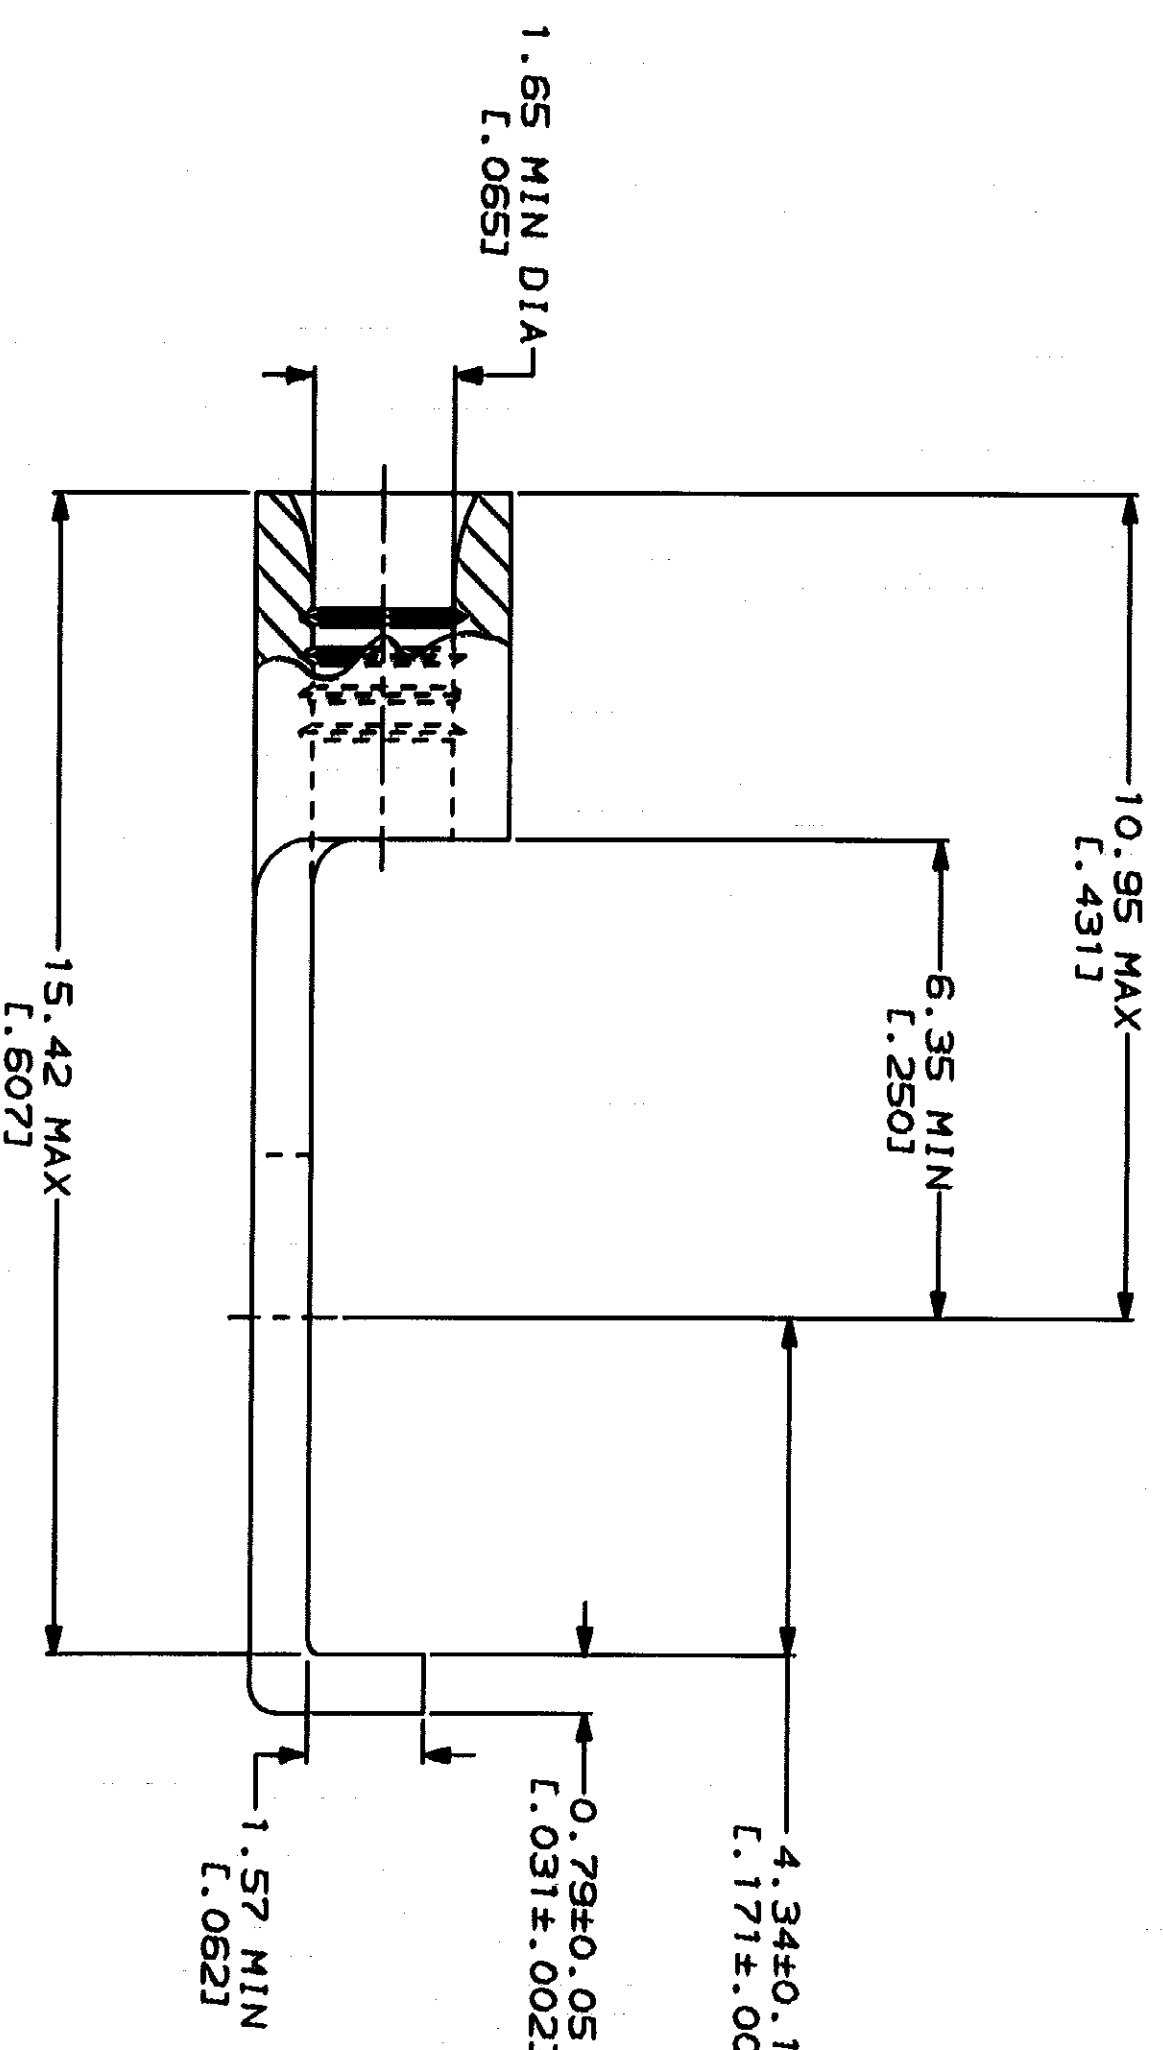

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING
TEMPERATURE: 170°C MAX

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES—
TOLERANCES ON:
2 PLG DEC ± .005
3 PLG DEC ± .005
ANGLES ± .5°

DR 3-2-93
VA BRINKMAN
CHK 3-2-93
DA PATTERSON
APPD 3-2-93
DE MILLER
APPD 3-2-93
JL NECKLEY
PRODUCT SPEC

AMP Incorporated
Harrisburg, PA 17105-3608

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS
1-800-522-6752

VOLTAGE RATING:
NOT APPLICABLE

FINISH
TIN PLATE
0.0025±L.000100J MIN
TKR PER MIL-T-10727

NAME
TERMINAL, FLANGED
SPADE, BUDGET

32494
PART NO

FOR APPLICATION
TOOLING INFORMATION
1-800-722-1111

WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² (509-3,260) CIR MILS
STRAINED

APPLICATION SPEC

SIZE
CAGE CODE
00779

DRAWING NO
32494
SHEET
1 OF 1