



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00397	Connector, 4C audio plug, 3.5xL20.7 mm, brass, nickel plated, molding style	2	
2	30-01375	Wire, 3C, BC, 28 AWG, 300V, 80C, 4.3 mm, shielded, PVC, nylon braid	1	
3	24-00085	Overmold, audio plug, 3.5 mm, 90° slim line, Tensility	2	PVC, black

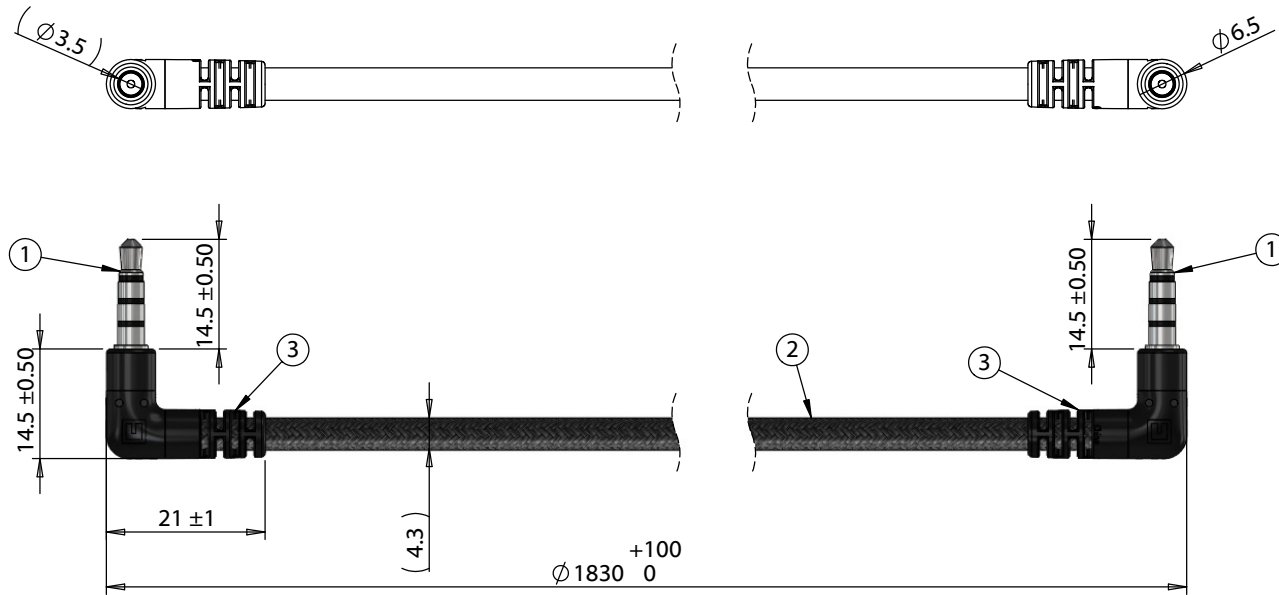

Wiring Diagram		
50-00397	wire color	50-00397
A	red	A
B	white	B
C	green	C
D	shield	D

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	8/10/2020	Initial release	JC <small>Digitally signed by JC Date: 2020.08.10 11:16:24 -07'00'</small>	RoHS compliant	
			Verified: AW <small>Digitally signed by AW Date: 2020.08.10 13:33:06 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5 mm 4C 90° 50-00397 audio plug to same, 28 AWG, 30-01375 wire, nylon braided	
				Size:	Part number:
				A	10-03754
				Scale: 1:1	Sheet 1 of 1

5

4

3

2

1