


PC board drilling dimensions  
(after plating - thickness: 1.60 to 3.20 mm)

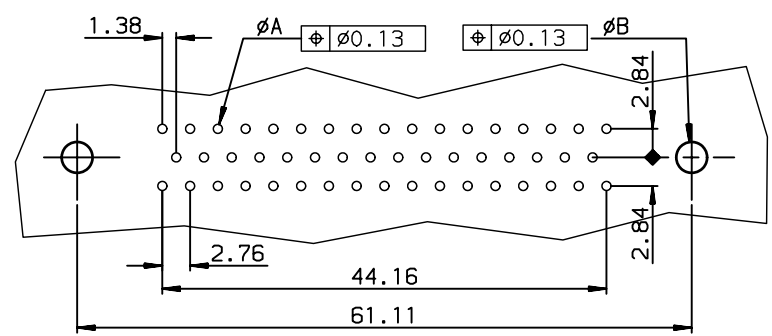

TIN LEAD PART NUMBER

D50S90C4PA00	D50S90C6PA00
Gold flash	0,76 μ gold

LEAD FREE PART NUMBER

D50S90C4PA00LF	D50S90C6PA00LF
Gold flash	0,76 μ gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

European Views

rev	ecn no	dr	date
C	LS06-0011	MPE	2006/01/11
D	LS06-0097	LGO	2006/07/29
E	LS06-0140	LGO	2006/11/21
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M PESSON	2006/01/11	ANGULAR	0.X ±0.1
Eng	P LEGARE	2006/01/11	LINEAR	0.XX ±0.1
Chr	-	-	0.XX' ±2'	0.XXX ±0.1
Appr	-	-	Product family	D-SUB
			size	A3
			ECN	LS06-0140
			Spec ref	-
Title			FEMALE CONNECTOR DELTA D	
with straight press fit contact			dwg no	
catalog no			C01-8646-0431	
			Rev.	
			E	
			CUSTOMER sheet 1 of 1	

Copyright FCI, FCJ