
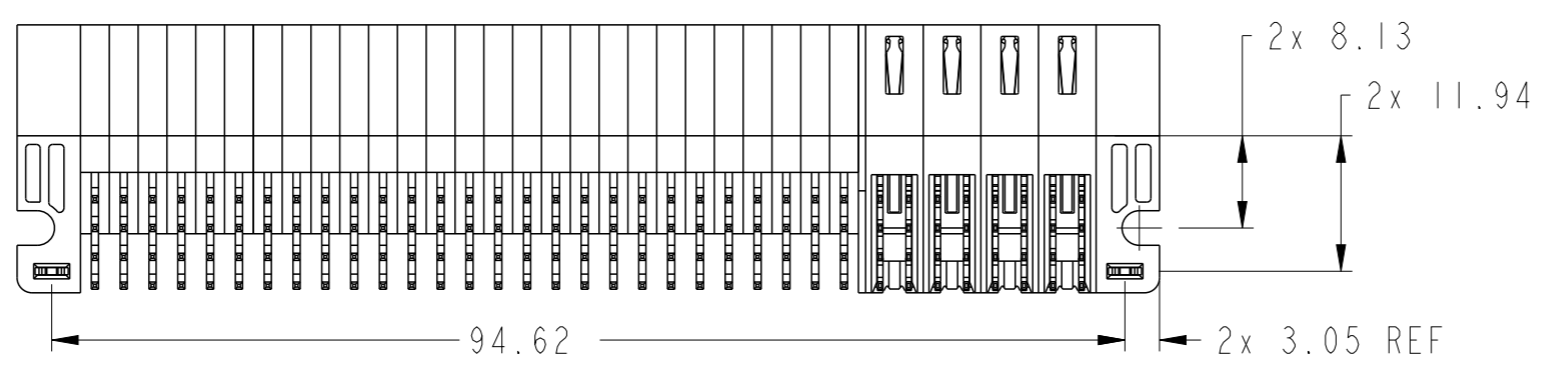
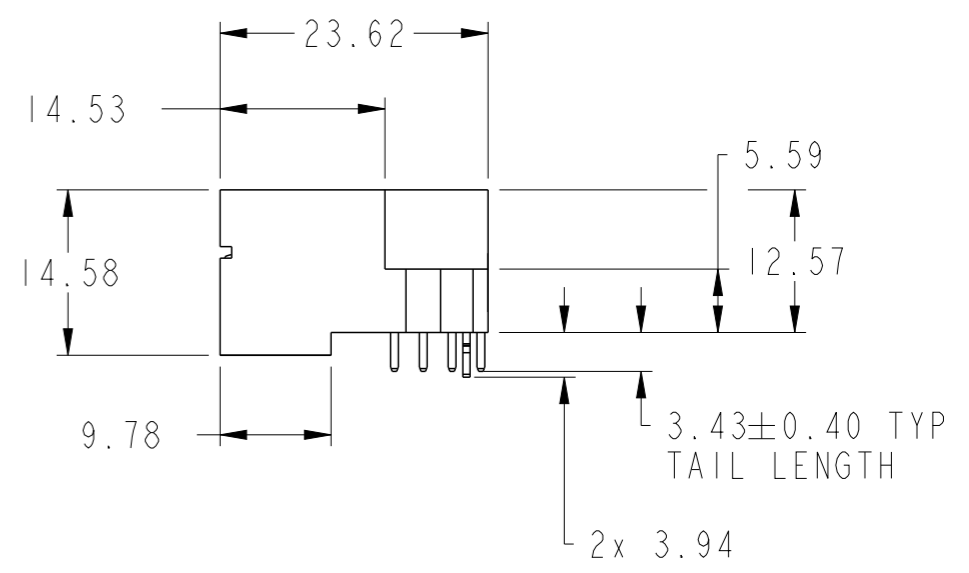
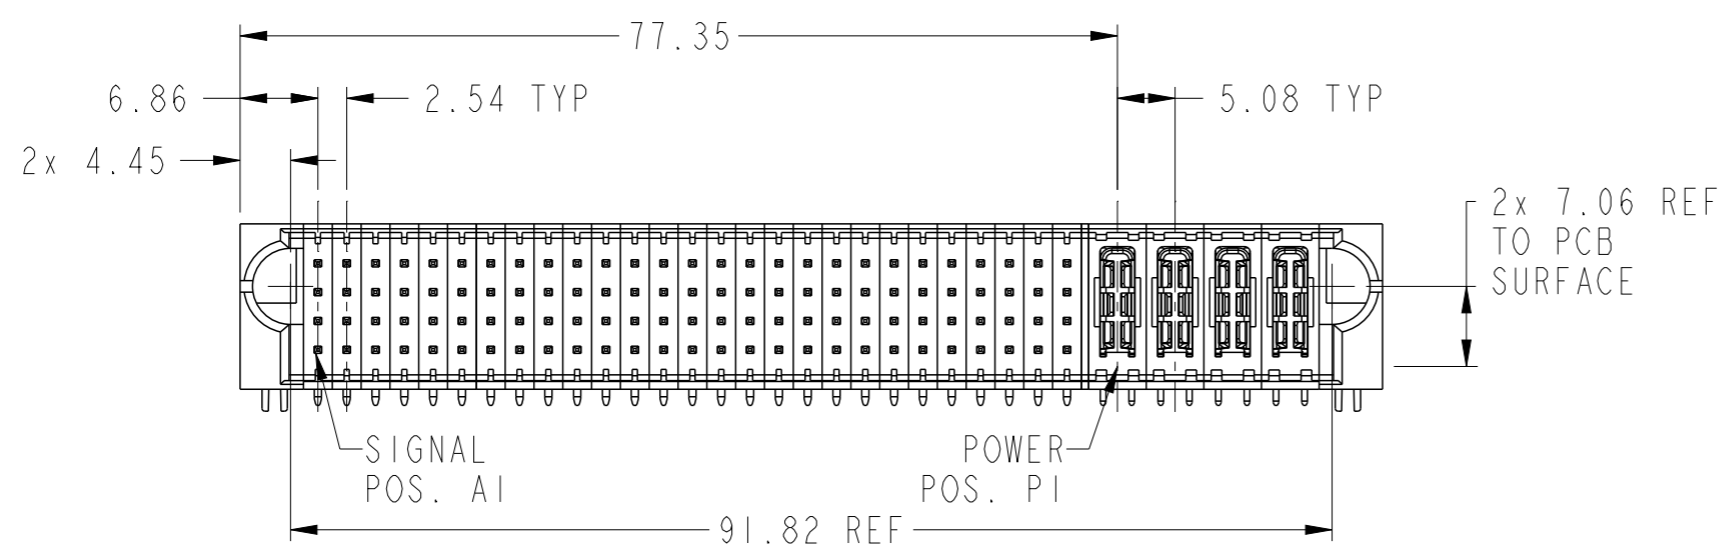




PRODUCT NUMBER SEE SHEET 2

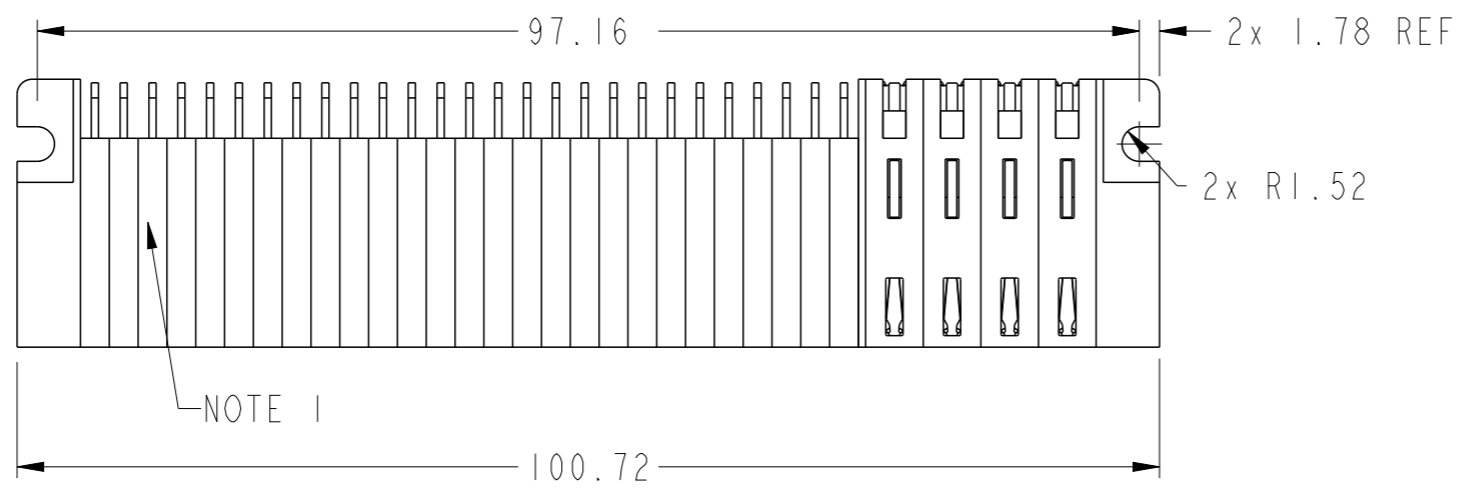

Copyright FCI.

spec ref	*	dr	Rainbow Zhan	2015/02/03	projection	MM	size	A3	scale	3:2								
tolerance std	ASME Y14.5	eng	Vicking Liu	2015/11/22			ecn no	-	rel level	Released								
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2015/11/22			product family	PwrBlade+	rel level	Released								
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.5				0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°		cat. no.	108S + 4HDP RA STB HEADER
linear	0.X	±0.5																
	0.XX	±0.25																
	0.XXX	±0.10																
angular	0°	±2°																
ASME Y14.5		appr	Pei-Ming Zheng	2015/11/22	Product - Customer Drw		sheet 1 of 3											

PRODUCT NO. 10106132-4027101LF	ROWS DCBA	SIGNAL																											HIGH POWER				
		E1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	P1	P2	P3	P4

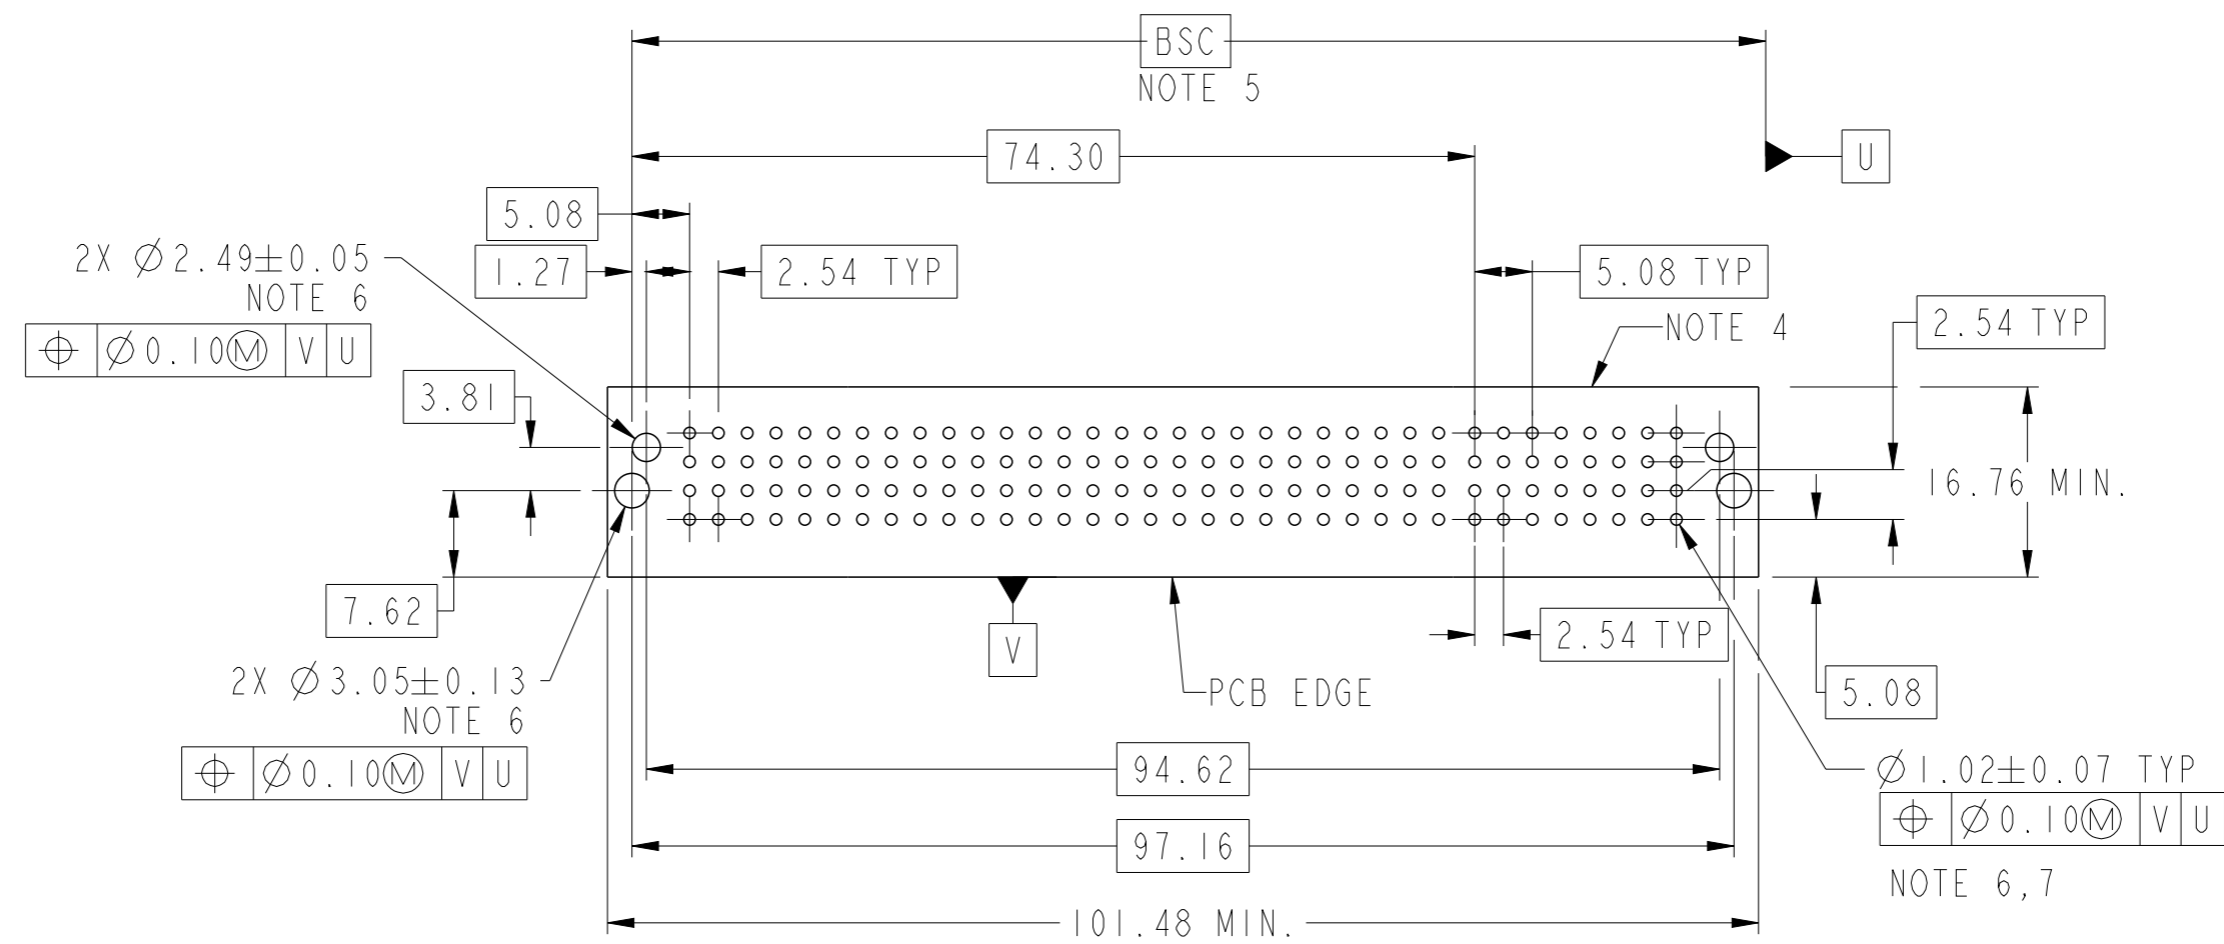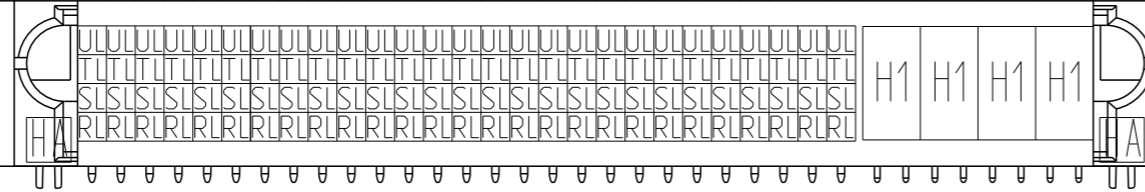

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
RL	MFBL SIGNAL CONTACT, ROW A (3.43)
SL	MFBL SIGNAL CONTACT, ROW B (3.43)
TL	MFBL SIGNAL CONTACT, ROW C (3.43)
UL	MFBL SIGNAL CONTACT, ROW D (3.43)

dr	Rainbow Zhan	2015/02/03	projection	MM	size	A3	scale	3:2
eng	Vicking Liu	2015/11/22			ecn no		rel level	
chr	Fancy Zhang	2015/11/22			-		Released	
appr	Pei-Ming Zheng	2015/11/22	product family		PwrBlade+			
			title 108S + 4HDP RA STB HEADER			dwg no 10106132-4027101		rev A
www.fci.com			cat. no.		Product - Customer Drw			sheet 2 of 3






Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.



Copyright FCI.

dr	Rainbow Zhan	2015/02/03	projection 	MM 	size	A3	scale	3:2
eng	Vicking Liu	2015/11/22			ecn no	-		
chr	Fancy Zhang	2015/11/22			rel level	Released		
appr	Pei-Ming Zheng	2015/11/22	product family	PwrBlade+				
		title 108S + 4HDP RA STB HEADER		dwg no 10106132-4027101	rev A			
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			