



MICROWAVE PRECISION

Fixed Attenuator

KAT-9+

50Ω 1.1W 9dB DC to 43.5 GHz

THE BIG DEAL

- Super wide bandwidth, DC-43.5 GHz
- High Power Handling, 1.1W
- Small package, 2x2 MCLP™
- Excellent VSWR, 1.11:1 typ.



Generic photo used for illustration purposes only

CASE STYLE: MC1630-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- 5G
- Test and Measurement
- Radar
- Communication
- Defense

PRODUCT OVERVIEW

KAT-9+ is an absorptive fixed attenuator fabricated using highly reliable and repeatable GaAs MMIC IPD process. The model operates from DC to 43.5GHz. It achieves outstanding attenuation accuracy and flatness while maintains excellent VSWR throughout the entire band. The model can also handle input power up to 1.1W, which makes this model an ideal choice for a wide range of applications.

KEY FEATURES

| Feature | Advantages |
|---|---|
| Wideband operation, From DC to 43.5 GHz | Supports a wide array of applications including 5G, wireless infrastructure, microwave communications, satellite, defense and aerospace, medical broadband and optic applications. |
| Small Size and simple to use (2 mm x 2 mm) | As a single chip solution, the KAT series occupies less board space than a lumped element approach, minimizes component count and ensures repeatable performance over wide frequency range. |
| Wide range of nominal attenuation values (0,1,2,3,4,5,6,7,8,9,10,12,15,20 & 30) | Small increment offering enables circuit designer to change attenuation values without motherboard redesign making the KAT series ideal for select at test application. |
| MCLP™ Package | Low Inductance, repeatable transitions, excellent thermal path make the KAT series an ideal solution as an alternative to "do it yourself" lumped element-based approach. |

* IPD - Integrated Passive Device.

REV. B
ECO-014625
KAT-9+
MCL NY
220818





MICROWAVE PRECISION

Fixed Attenuator

KAT-9+

Mini-Circuits

50Ω 1.1W 9dB DC to 43.5 GHz

ELECTRICAL SPECIFICATIONS¹ AT 25°C, 50Ω, UNLESS NOTED OTHERWISE

| Parameter | Condition (GHz) | Min. | Typ. | Max. | Unit |
|-----------------|-----------------|------|------|------|------|
| Frequency Range | | DC | — | 43.5 | GHz |
| Attenuation | 0.01 - 5 | 8.6 | 8.9 | 9.4 | dB |
| | 5 - 10 | 8.6 | 8.9 | 9.4 | |
| | 10 - 20 | 8.6 | 8.9 | 9.5 | |
| | 20 - 30 | 8.6 | 9.1 | 9.9 | |
| | 30 - 40 | — | 9.3 | — | |
| | 40 - 43.5 | — | 8.8 | — | |
| VSWR | 0.01 - 5 | — | 1.06 | 1.3 | :1 |
| | 5 - 10 | — | 1.09 | 1.4 | |
| | 10 - 20 | — | 1.11 | 1.9 | |
| | 20 - 30 | — | 1.26 | — | |
| | 30 - 40 | — | 1.58 | — | |
| | 40 - 43.5 | — | 1.60 | — | |

1. Tested on Mini-Circuits test board TB-934-9C+. See Characterization/Application Circuit in Fig. 1

MAXIMUM RATINGS²

| Parameter | Ratings |
|---|-------------------|
| Operating Case Temperature ³ | -40°C to 85°C |
| Storage Temperature | -65°C to 150°C |
| RF Input Power | 1.1W ³ |

2. Permanent damage may occur if any of these limits are exceeded.

3. Power rating derated to 0.8W at 85°C






MICROWAVE PRECISION

Fixed Attenuator

KAT-9+

50Ω 1.1W 9dB DC to 43.5 GHz

PAD DESCRIPTION



| Function | Pad Number | Description |
|----------|------------------|---------------|
| RF-IN | 2 | RF input pad |
| RF-OUT | 5 | RF output pad |
| GND | 1,3,4,6 & Paddle | Ground |

CHARACTERIZATION TEST CIRCUIT


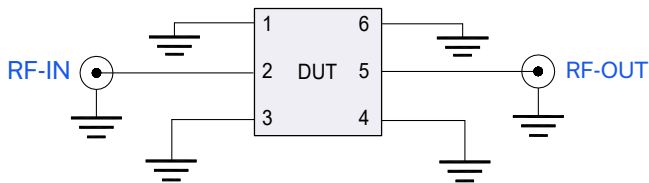


Fig 1. Block diagram of Test Circuit used for characterization, Test board TB-934-9C+ Conditions: Attenuation, VSWR: Pin=0 dBm

PRODUCT MARKING



Marking may contain other features or characters for internal lot control

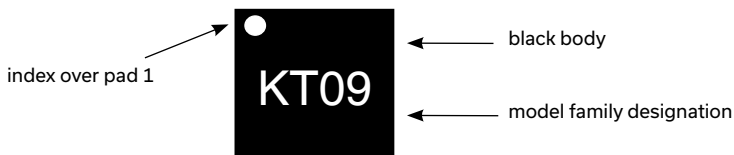

MICROWAVE PRECISION

Fixed Attenuator


KAT-9+

50Ω 1.1W 9dB DC to 43.5 GHz


TYPICAL PERFORMANCE DATA AT 25°C

| Frequency (GHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 0.01 | 8.95 | 1.12 |
| 0.5 | 8.98 | 1.11 |
| 1.0 | 9.00 | 1.11 |
| 3.0 | 8.99 | 1.16 |
| 5.0 | 8.97 | 1.20 |
| 7.0 | 9.00 | 1.24 |
| 10.0 | 8.88 | 1.16 |
| 12.0 | 8.91 | 1.11 |
| 15.0 | 8.92 | 1.19 |
| 20.0 | 8.96 | 1.16 |
| 25.0 | 9.04 | 1.30 |
| 30.0 | 9.13 | 1.35 |
| 35.0 | 9.43 | 1.59 |
| 38.0 | 9.41 | 1.58 |
| 43.5 | 8.93 | 1.66 |

KAT-9+
ATTENUATION

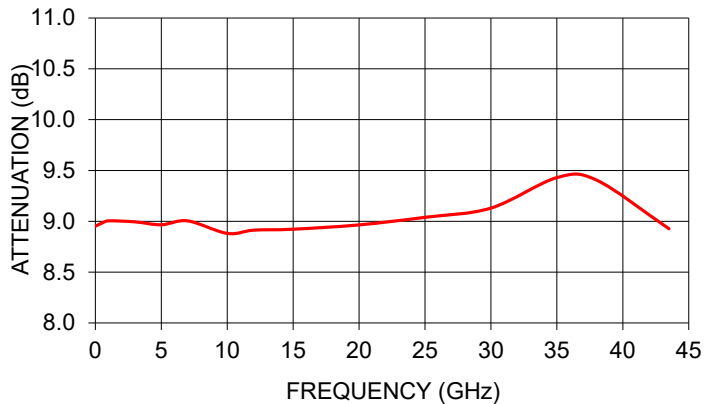

KAT-9+
VSWR

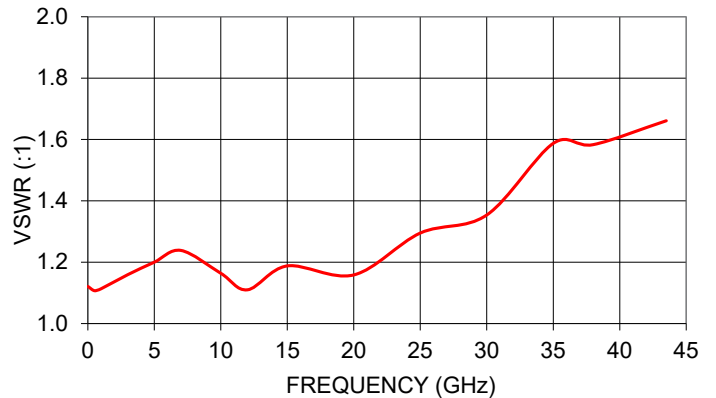



MICROWAVE PRECISION

Fixed Attenuator

KAT-9+

50Ω 1.1W 9dB DC to 43.5 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS [CLICK HERE](#)

| | |
|---------------------------------------|--|
| Performance Data | Data Table Swept Graphs |
| Case Style | MC1630-1 Plastic package, Terminal finish: Matte Tin |
| Tape & Reel | F66 |
| Standard quantities available on reel | 7" reels with 20, 50, 100, 200, 500, 1K, 2K devices. |
| Suggested Layout for PCB Design | PL-586 |
| Evaluation Board | TB-934-9C+ |
| Environmental Ratings | ENV08T1 |

ESD RATING

Human Body Model (HBM): Class 2 (Pass 2000V) per ANSI/ESD STM 5.1 - 2001

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

