

Catalog Number
Project Number
Type

DESCRIPTION

LED-GIMBAL-PRO Series lights are bright, energy efficient and elegantly designed. They are an ideal solution for commercial and residential applications requiring compact shape, superior quality and visual aesthetics. This 8W light produces 696-784Lm (depending on the CCT). At 1.77" tall and 2.48" round they can fit into tight spaces that a traditional recessed can light can't, such as ceilings with ductwork/piping/obstructions, hot-roof ceilings with limited vertical clearance, and tight soffits. It comes in Black, White and Brushed Nickel Finishes. Each light can be set at 3000K, 4000K or 5000K CCT (Adjustable). These lights feature an easily adjustable LED face (Gimbal) that can be pointed straight downward, making them compatible with sloped ceilings.

Lifespan: 39,000 hrs
 Certifications: ETL, CE, RoHS
 Warranty: 5 years


ELECTRICAL

Lumen output: 696-784 lm
 Wattage: 8 watts
 CCT (adjustable): 3000K, 4000K, 5000K
 Operating voltage: 110-130 VAC
 Dimming: Dimmable

MATERIAL / OPTICS

Finish: White, black, brushed nickel
 Interchangeable trim ring
 Light direction: Downlight
 Beam angle: 40 degrees

3" RECESSED DIMMABLE ADJUSTABLE CCT LIGHT RCTG-7W-3IN

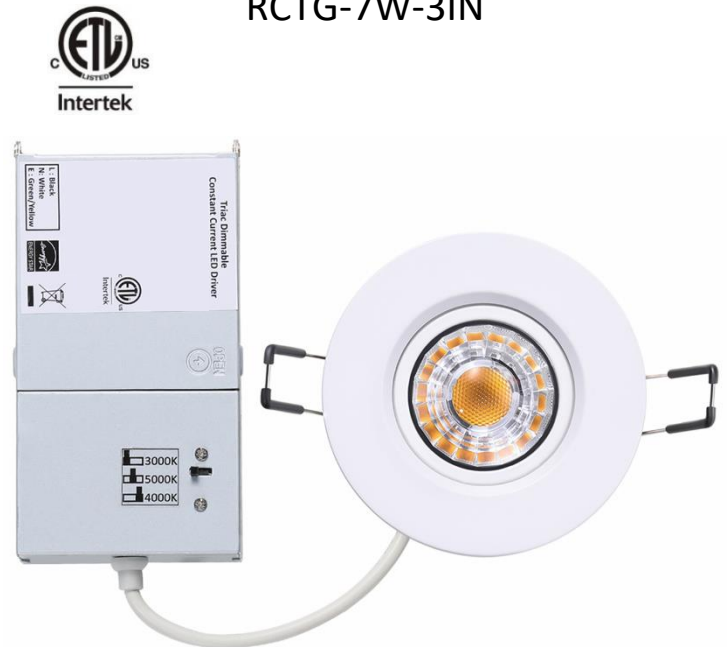

Diameter	Height
Module - 2.48 in (63 mm)	1.77 in (45 mm)
Trim - 3.34 in (85 mm)	
Cutout (min) - 2.75 in (70 mm)	
Cutout (max) - 2.88 in (73 mm)	

Example: **RCTG-7W-3IN-WH**

Model	Power	Voltage	Trim Size	Finish
RCTG	7W 696-784 lm	110-130 VAC	3IN	WH White B Black N Brushed Nickel

TRIM OPTIONS



BRUSHED NICKEL



BLACK



WHITE

RECESSED LIGHT AND DRIVER



PHOTOMETRICS

