

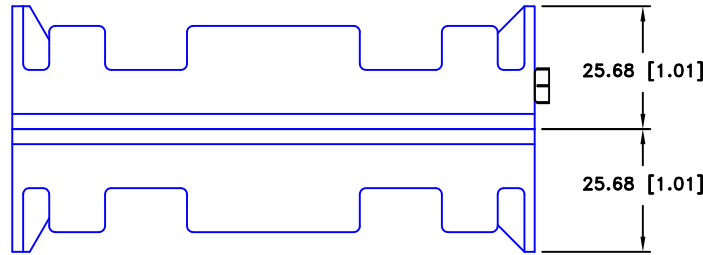




Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/08/13	A	Updated to ROHS 2 compliant	T.B.	B.S.	
08/01/14	B	ADDED SNAP LOCATION	T.B.	B.S.	
05/19/17	C	DIM. 1.84 WAS 3.18	T.B.	B.S.	

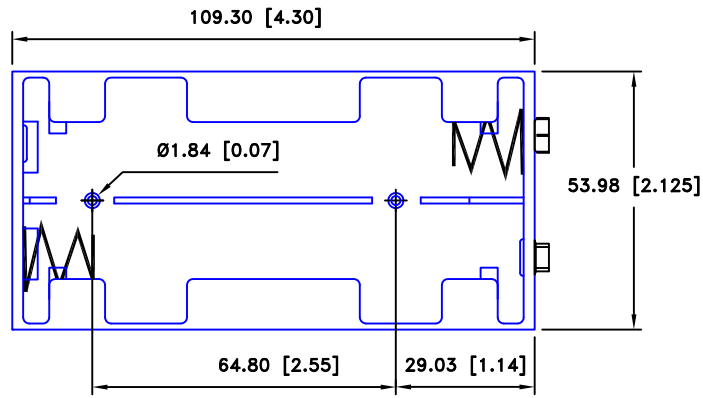

SPECIFICATION:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKLE PLTD.
 9 VOLT SNAPS: BRASS, NICKEL PLATED
 SPRING: SPRING STEEL, NICKLE PLTD.
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale 1=1	Drawn By T.S.
			Approved By T.B.
decimal ±.5 (.020)	Title EIGHT "C" CELL HOLDER		
Fractional ± .8 (.030)	Date 5/19/17	Drawing Number BH28CSF	
Angular ± 3°			