

版次 REV	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE



A


B

C


A

B

C



Blue1	Orange2	Green3	Brown4	Grey5	White6	Red7	Black8	Yellow9	Violet10	Pink11	Aqua12
-------	---------	--------	--------	-------	--------	------	--------	---------	----------	--------	--------

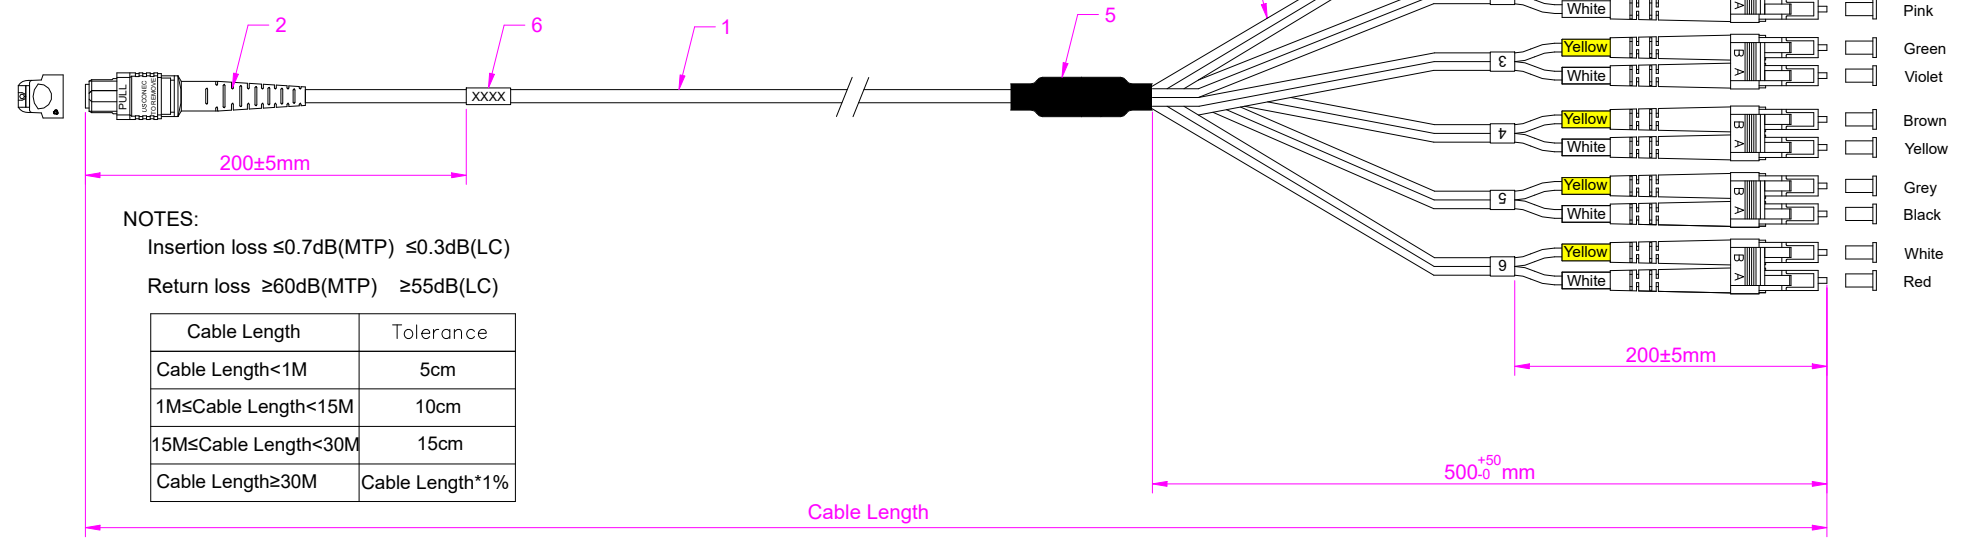

NOTES:
 Insertion loss ≤0.7dB(MTP) ≤0.3dB(LC)
 Return loss ≥60dB(MTP) ≥55dB(LC)

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

7	6	Cable Marker	标贴字码(1-6) (13*30mm)
6	1	Cable Label	线标 (25*30mm)
5	1	Fanout Kit	分支器(L-3号)
4	A/R	OD: 2.0mm, Duplex Color: Yellow OFNP	Ø:2.0mm, 双工 OFNP 黄色(内附0.9mm空管)
3	6	LC/UPC SM Duplex 2.0mm Connector(Blue Housing White Boot)	LC/UPC 单模 双工 2.0mm 连接头 (蓝色外壳 白色尾套)
2	1	MTP/APC Female SM 12F 3.0mm Connector (Green Housing Black Boot)	MTP/APC 母头 单模 12芯 3.0mm 连接头 (绿色外壳 黑色尾套)
1	A/R	Ø3.0mm, Singlemode 9/125 G657A1, 12Fibers Micro Cable, Color:Yellow, OFNP	Ø3.0mm, 单模 G657A1, 12芯迷你缆, 黄色, OFNP

ITEM	QTY	P/N	SPECIFICATIONS				规格					
			制图 DRAW	YUFENG XIE	日期 DATE	25-07-2022	TITLE: Fiber Optic patch Cord MTP/APC-LC/UPC 12 Fibers Singlemode					
			审核 CHECK	WEN ZHOU LIAO	批准 APPROVED	Zhenlong Yu	客户图号 CUSTOMER NO		图号 DWG NO	ADT-01-1192-0804-0003	版次 REV	A

1

2

3

4

5

6