
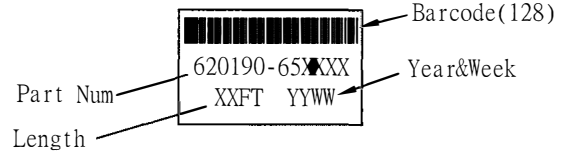


CUST P/N
REV
D
C
B
A

8 7 6 5 4 3 2 1

RoHS COMPLIANT
US PAT No.8,469,734
INT'L PAT PENDING

ZONE		REV	DESCRIPTION	DATE	APPROVED
-	A		INITIAL DESIGN	20130630	L.Chen
-	B		US PATENT NO. ADDED	20130729	L.Chen
-	B1		BOM AND CABLE LABEL REVISED	20150831	Alan M
-	B2		MARKING REVISED	20160613	Alan M

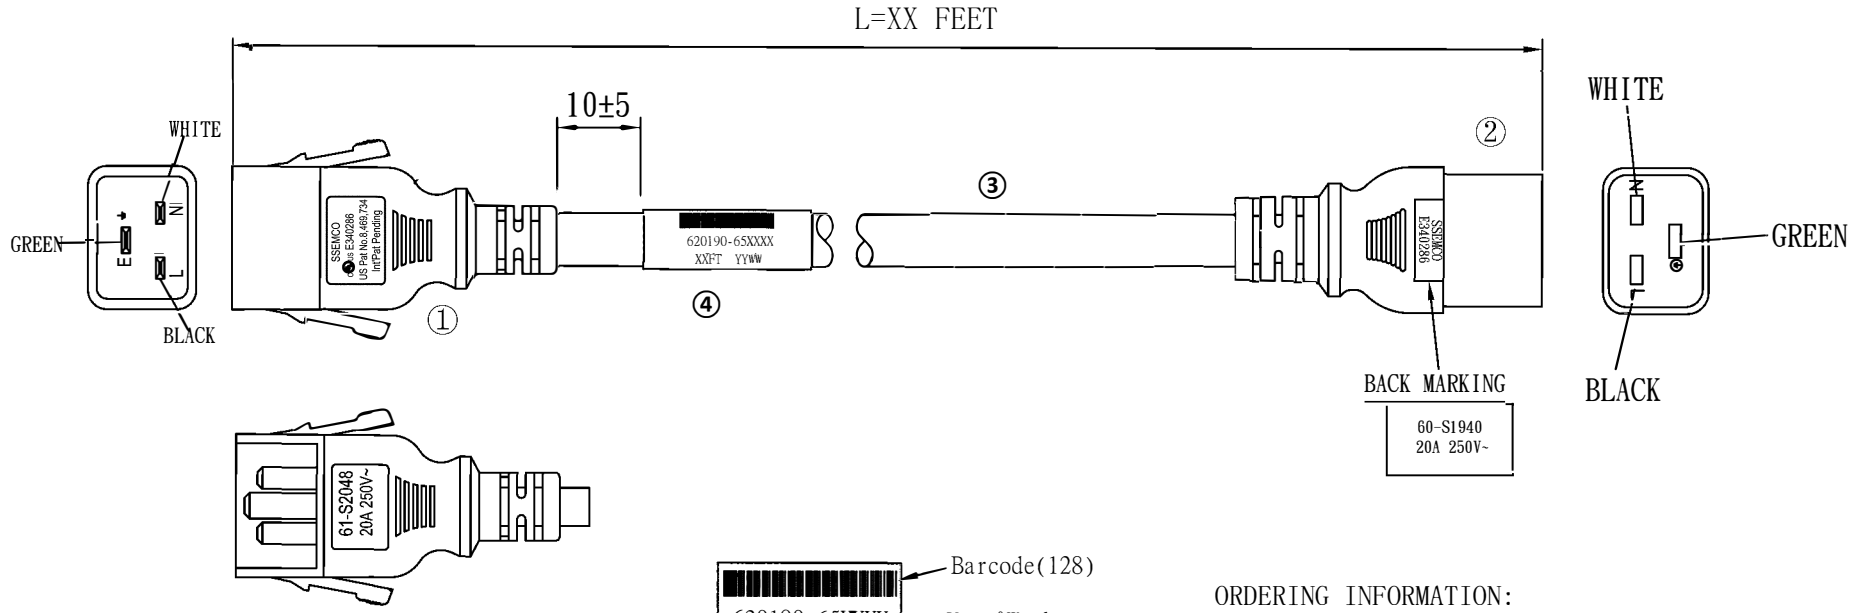

ORDERING INFORMATION:

620190 - 6 5 XXX X

SERIES _____

WIRE GAUGE:
For North America:
6=12AWG

COLOR CODE:
0=Black, 1=Grey, 2=Blue, 4=Green, 6=Orange, 7=Red, 8=Yellow, 9=White

CABLE LENGTH:
For Inch System:
First two digits=feet; last digit=inch

WIRE TYPE:
5=SJT

ITEM	DESCRIPTION	APPROVAL	QTY
4	Label		1
3	WIRE SJT 12AWG 105C 20A/300V	UL/cUL or CSA	1
2	IEC60320 C19 CONNECTOR 20A/250V	UL/cUL	1
1	IEC60320 C20 LOCKING PLUG 20A/250V	UL/cUL	1

UNLESS OTHERWISE SPECIFIED
1) INTERPRET DRAWING IAW ASME Y14.100-2000
2) REMOVE ALL BURRS AND SHARP EDGES .2 R MAX
3) DIMENSIONS ARE IN MILLIMETERS
4) TOLERANCES ARE:
DECIMALS: X +/-0.3; XX +/-0.15; XXX +/-0.005
ANGLES: X +/-1°; X.X +/-0.5°; X.XX +/-0.25°



Product Name
IEC320 Locking C20 to C19 Power Cord

THIRD ANGLE PROJECTION	Des'd By: L.Chen
	Drawn By: D.Chen
	App'd By: Alan. M

ITEM NO	PWCD-C19C20-20A-XXF-YYY-P	REV	B2
DWG NO.		SHEET	1 OF 1

8 7 6 5 4 3 2 1