



# VRLA Rechargeable Battery

## BPL7-12



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.

### APPLICATION

- UPS
- Laboratory Equipment
- Toy-Cars
- Power Packs
- Fishing Lights



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	7.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	2600g(5.73lbs.)
Terminals	T2 (Faston Tab 250) T1 is optional
Internal Resistance	≤25m Ω (Fully Charged )
Max. Discharge Current	105 A (5 sec.)
Max. Charge Current	2.1 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS( UL 94-HB) BPL7-12 Optional: Flame Retardant ABS(UL 94-V0) BPL7-12FR



- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- **Length**  
151±1.5 (5.94±0.06)
- **Width**  
65±1.5 (2.56±0.06)
- **Container Height**  
93±1.5 (3.66±0.06)
- **Total Height**  
98±2.0 (3.86±0.08)

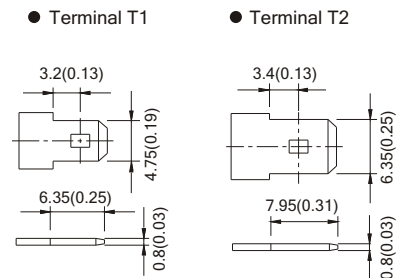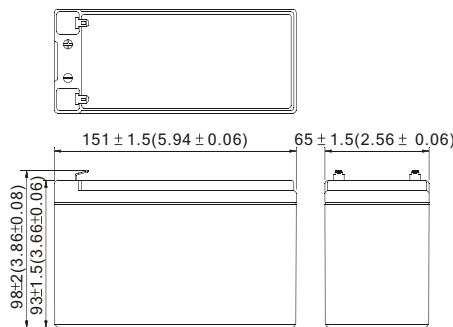

### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	228.0	171.4	138.8	83.50	48.40	20.40	14.10	7.86	4.11
1.75V	264.0	185.7	145.3	86.70	49.80	20.80	14.30	7.98	4.20
1.70V	280.0	192.4	149.7	88.60	50.70	21.00	14.40	8.02	4.22
1.65V	293.0	197.0	153.2	89.90	51.40	21.20	14.50	8.04	4.23
1.60V	302.0	200.9	156.2	90.80	51.90	21.30	14.50	8.04	4.23

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	20.54	15.09	12.07	7.076	4.067	1.700	1.175	0.655	0.343
1.75V	24.22	16.35	12.63	7.347	4.185	1.733	1.192	0.665	0.350
1.70V	25.69	16.94	13.02	7.508	4.261	1.750	1.200	0.668	0.352
1.65V	26.88	17.34	13.32	7.619	4.319	1.767	1.208	0.670	0.353
1.60V	27.71	17.68	13.58	7.695	4.361	1.775	1.208	0.670	0.353

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.