



SAW filters for infrastructure systems

Series/Type: B3643

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39371B3643Z710		2012-01-13	2012-12-31	2013-03-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Data Sheet

 Ceramic package **QCC10B**
Features

- IF low-loss filter for wireless LAN systems
- Channel selection according to IEEE 802.11
- Temperature stable
- Ceramic SMD package

Terminals


- Gold plated

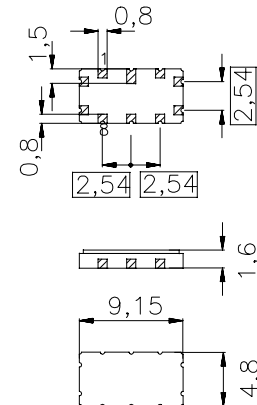

Dimensions in mm, approx. weight 0,23

Pin configuration

10	Input
5	Output
9	Input ground
4	Output ground
2, 7	Ground
1, 3, 6, 8	Case ground

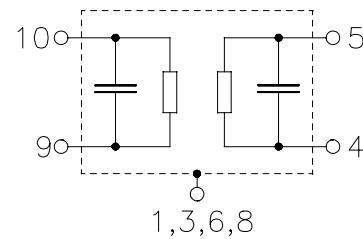

Type	Ordering code	Marking and Package according to	Packing according to
B3643	B39371-B3643-Z710	C61157-A7-A49	F61074-V8035-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings


Operable temperature range	T_A	-25 / +70	°C	source impedance 50 Ω
Storage temperature range	T_{stg}	-40 / +85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	

Data Sheet
Characteristics

Operating temperature range: $T_A = -20 \dots +60 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$ and matching network
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$ and matching network

		min.	typ.	max.	
Nominal frequency	f_N	—	371,0	—	MHz
Insertion attenuation at f_N	α_N	—	10	11,5	dB
Pass bandwidth					
$\alpha_{rel} < 1 \text{ dB}$	B_{1dB}	1,3	1,6	—	MHz
$\alpha_{rel} < 3 \text{ dB}$	B_{3dB}	—	2,0	2,5	MHz
Amplitude ripple (p-p)	$\Delta\alpha$				
$f_N - 0,5 \text{ MHz} \dots f_N + 0,5 \text{ MHz}$		—	0,3	1,0	dB
Amplitude slope in passband		—	0,0	$\pm 0,5$	dB
Group delay ripple (p-p)	$\Delta\tau$				
$f_N - 0,65 \text{ MHz} \dots f_N + 0,65 \text{ MHz}$		—	80	120	ns
$f_N - 1,00 \text{ MHz} \dots f_N + 1,00 \text{ MHz}$		—	90	—	ns
Relative attenuation (relative to α_N)	α_{rel}				
$f_N - 50 \text{ MHz} \dots f_N - 15 \text{ MHz}$		45	60	—	dB
$f_N - 15 \text{ MHz} \dots f_N - 5 \text{ MHz}$		40	55	—	dB
$f_N + 5 \text{ MHz} \dots f_N + 25 \text{ MHz}$		40	45	—	dB
$f_N + 25 \text{ MHz} \dots f_N + 50 \text{ MHz}$		45	50	—	dB
Temperature coefficient of frequency ¹⁾	TC_f	—	-0,036	—	ppm/K ²
Turnover temperature	T_0	—	16	—	$^\circ\text{C}$


¹⁾ Temperature dependance of f_C : $f_C(T_A) = f_C(T_0)(1 + TC_f(T_A - T_0)^2)$

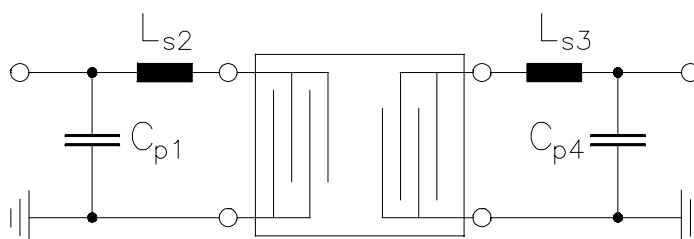Matching network (Element values depend upon PCB layout)


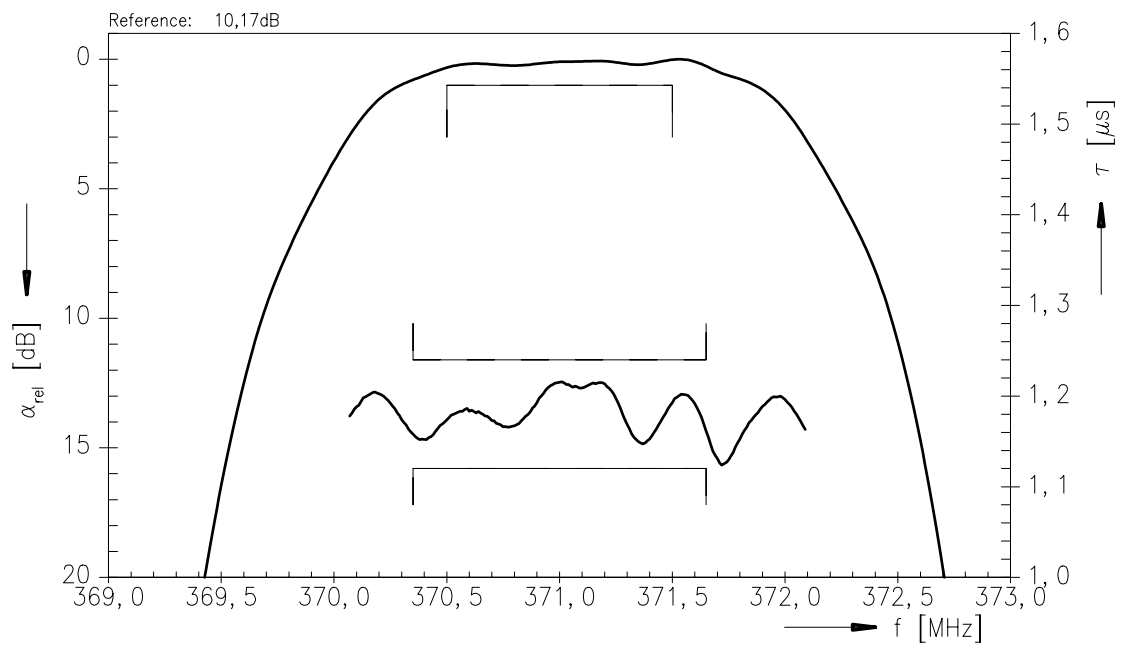
$C_{p1} = 15 \text{ pF}$
 $L_{s2} = 27 \text{ nH}$
 $L_{s3} = 22 \text{ nH}$
 $C_{p4} = 15 \text{ pF}$

Data Sheet

Transfer function

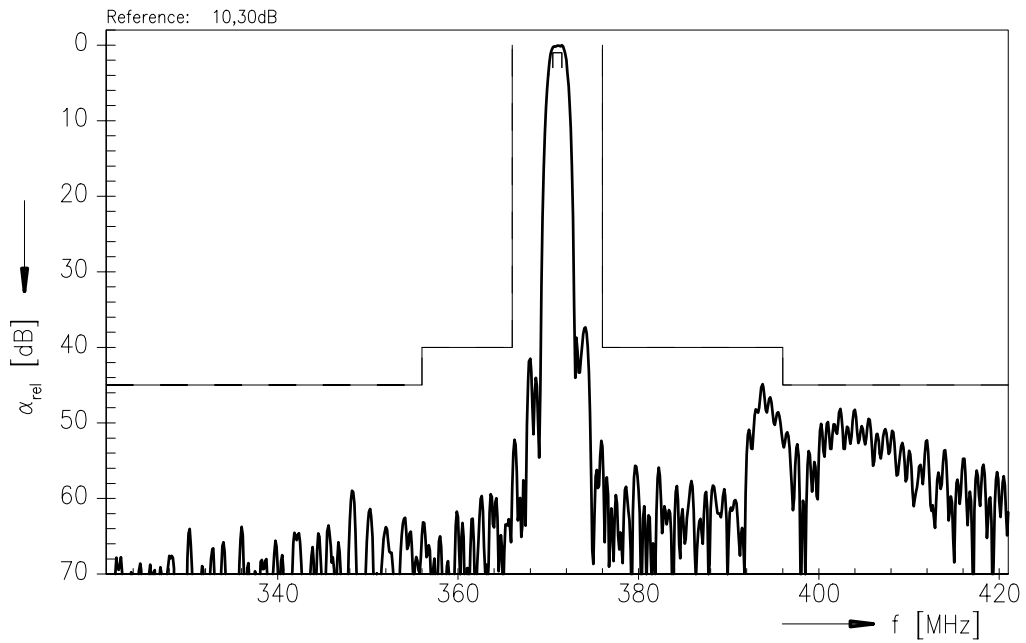

Transfer function (pass band)



Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC IS
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.