
т	۵	н т	m	0





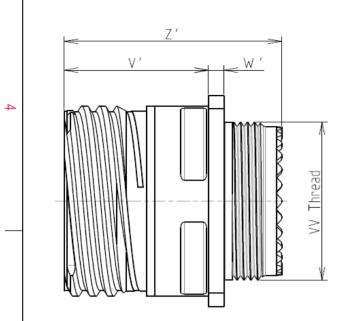

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 18.3 g ± 10%

8D 0

G

13

J

98

В


F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

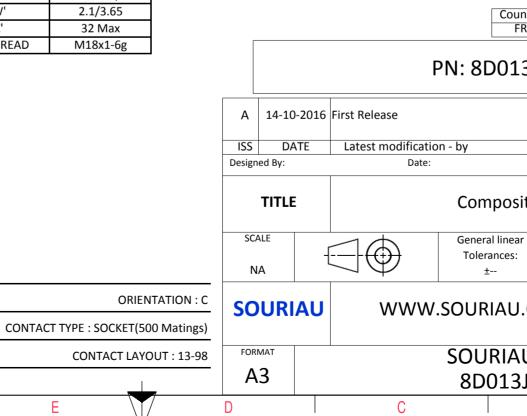

	σ		A		
					4
AS EXA	AMPLE				3
s whic er of t	non-conformit ch does not co he Parties or b n, technical n	mply with by a third part	у		
untry FR	Jurisdiction & Control List Not Listed				2
.319	J98BC				
				MOD N°	
		CUSTOMER	R DRAWING		-
site	e Receptacle 8D series				
ar :			PROJECT 59		1
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
8178	BBC-C		A	1/2	J

		۵	гт –	m	U	0	
		Contact Layout				Ρ	Panel Cutout
4		$ \begin{array}{c} & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			ţ.	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Cont positio A B C C D E F G G H	n ID (mm) (mm) +.000 (0.00) +.195 (4.95) +.125 (3.18) +.150 (3.81) +.193 (4.90) +.030 (0.76) 164 (4.17) 105 (2.67) +.600 (0.00) 135 (3.43) 164 (4.17) 105 (2.67) 193 (4.90) +.033 (0.76) 193 (4.90) +.033 (0.76)			12 12	ØA	ØT_
ω	00					Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pi the Specifications issued b	Products whi by either of
N						(professional reco	Country FR
					A 14-10-202 ISS DATE Designed By:	PN: 8	3D013J
					SCALE	Cor	mposite eral linear lerances:
<u> </u>					SOURIAU		± RIAU.CO
			-		FORMAT A3	80	URIAU D013J9
	Н	G	l F	E \	D	С	

