


## Specification Sheet

Part Number: 553-50176

Slide Slit and optional center slits for easy wire insertion.  
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

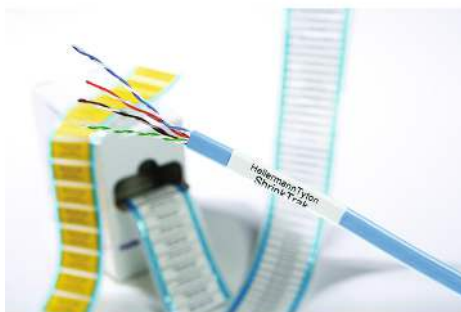

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 3000/box

Article Number 553-50176

Type HST4.8-1.6WH-S

Color White (WH)

Quantity Per box

**Product Description** HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

**Short Description** ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 3000/box

Global Part Name HST4.8-1.6WH-S-PO-X-WH

Variant Thin-Wall

Width W (Imperial) 0.95

Width W (Metric) 24.13

Thickness T (Imperial) .003

Thickness T (Metric) .0762

Height H (Imperial) 0.312

Height H (Metric) 7.92

Width of Liner (Metric) 76.2

Width of Liner (Imperial) 3.0

Outside Diameter OD (Imperial) 0.187

Outside Diameter OD (Metric) 4.74

Outside Diameter Max (Imperial) 0.187

Outside Diameter Max (Metric) 4.74

Wall Thickness WT (Imperial) 0.026

Wall Thickness WT (Metric) 0.66

|                              |  |
|------------------------------|--|
| Material                     | Polyolefin, cross-linked (PO-X)  |
| Material Shortcut            | PO-X   |
| US MIL SPEC                  | MIL-STD-202G Method 215K<br>SAE-AS81531<br>SAE-AMS-DTL-23053/5 Class 1 and 3   |
| Flammability                 | UL 224 VW-1  |
| Halogen Free                 | No   |
| UV Resistant (Yes/No)        | No   |
| Operating Temperature        | -67°F to +275°F (-55°C to +135°C)  |
| Reach Compliant (Article 33) | Yes  |
| ROHS Compliant               | Yes  |
| Certification/Specification  | UL 224 125 °C 600V VW-1 SAE - AS81531 SAE - AMS - DTL-23053/5<br>Class 1 and 3 |
| Package Quantity (Imperial)  | 3000   |
| Package Quantity (Metric)    | 3000   |
| Customs Number               | 3917320000   |
| Labels per Column            | 1  |

## About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. ([www.hellermann.tyton.com](http://www.hellermann.tyton.com)).