


K24LOC-P30LJG0-130S series_I, type_k2



General information

Part number	K24LOC-P30LJG0-130S
Termination	solder
Size	4
Locking principle	break , push
Coding	0_key
Cable Diameter	cable_mini_13
Cable outlet	bend_relief

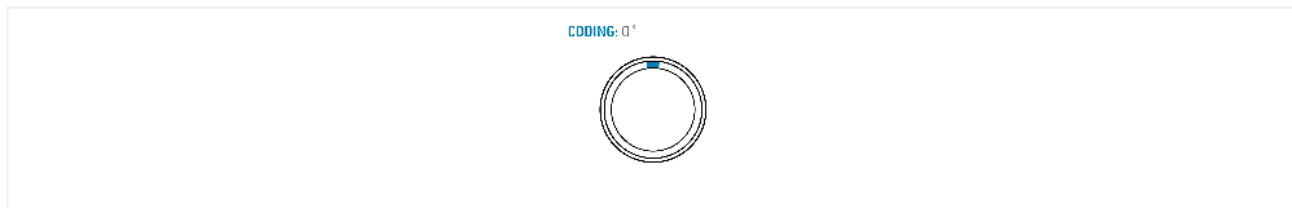

Contact insert description

Number of contacts	30
Contact type	sockets
Contact diameter	09mm
Insulator material	peek
Wire cross section	22_awg
Termination	solder
Termination diameter	085mm

reverse_gender_on_request

Technical information

Max. creepage and air clearance distance	08_mm	17_mm
Nominal current single contact	075_a	iec_60512_5_2
Test voltage	1575_kv_ac	sae_13441

safety_text

Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated_unmated

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2
ul_text
illustrative_text