
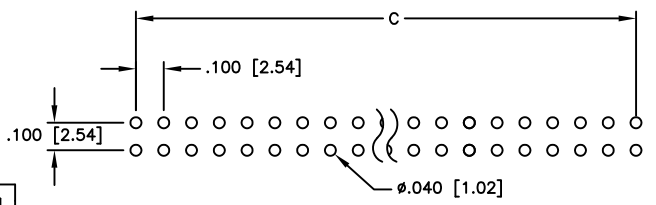
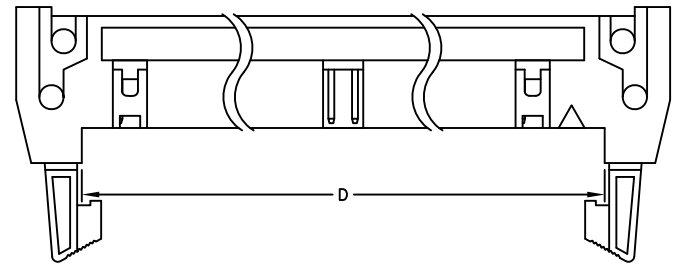




APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description   | Date     | Appr   |
|-----|-------|---------------|----------|--------|
| -   |       | RELEASED      | 12/10/09 |        |
| A   |       | ADDED DRAWING | 12/25/18 | AY/RC1 |




D

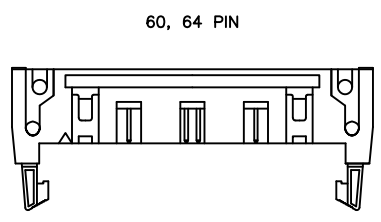

C

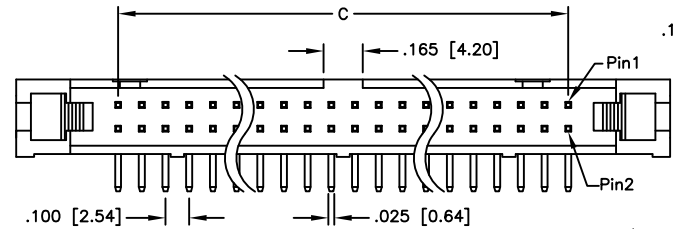

B

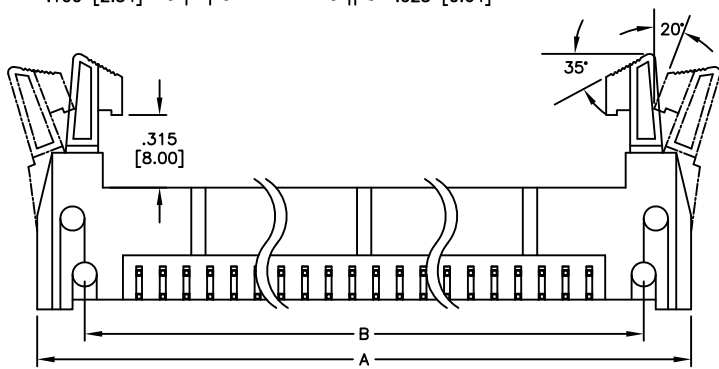

**SPECIFICATIONS:**

Material:  
 Insulator: PBT, glass reinforced, rated UL 94V-0, Color: Black  
 Contacts: Brass  
 Plating:  
 Gold flash over Nickel underplate overall  
 Electrical:  
 Current rating: 1 Amp  
 Contact Resistance: 10 mohm max  
 Insulation resistance: 1000 Mohm min  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -55°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.



Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64  
 A = .100 [2.54] x No. of Spaces + .855 [21.71]  
 B = .100 [2.54] x No. of Spaces + .454 [11.54]  
 C = .100 [2.54] x No. of Spaces  
 D = .100 [2.54] x No. of Spaces + .305 [7.74]

|   |              |          |
|---|--------------|----------|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE MM [INCHES]<br>TOLERANCES: EXCEPT AS NOTED |              |          |
| INCHES  |              | HOLES    |
| .X ± .10  | Ø.X ± .10    |          |
| .XX ± .020  | Ø.XX ± .015  |          |
| .XXX ± .015   | Ø.XXX ± .010 |          |
| APPROVALS   |              | DATE     |
| DRAWN   | DY           | 12/10/09 |
| CHECKED   |              |          |
| APPROVED  |              |          |

|   |                         |              |
|---|-------------------------|--------------|
| <b>ADAM TECH</b>  |                         |              |
| 909 Rahway Avenue, Union, NJ 07083<br>Phone: 908-687-5000 Fax: 908-687-5710 |                         |              |
| TITLE: LATCH BOX HEADER, RIGHT ANGLE<br>LONG EJECTOR LATCHES                |                         |              |
| SIZE<br>X   | PART NO.<br>MHR-XX-HUAL | REV.P<br>A   |
| REF: S00059T  | SCALE: NTS              | SHEET 1 OF 1 |