


Click to
ORDER
samples

AMSROL-78NZ



SMD


Aimtec's AMSROL-78NZ series was developed to meet increasing market demand for compact sizes and higher efficiency. This 0.5A switching regulator hits the mark on these metrics with its 12.50 x 13.50 x 3.50mm open frame, ultra-low height design and efficiency of up to 95%. It is also a viable replacement to the LM78 linear regulator.

The series feature an ultra-wide input voltage range of 4.75-36V, continuous short-circuit and low ripple noise (typ.: 20mV). These models target a diverse range of applications such as industrial controls, IoT, grid power, instrumentation, mining and other related industries where limited board space is a key concern. This new series can accommodate operating temperature from -40°C to +85°C with full power up to 71°C.


Features

- Input Range: 4.75VDC – 36VDC
- Operating Temp: -40 °C to +85 °C
- Low ripple & noise, up to 50mV(p-p) max
- Efficiency up to 95%
- ON/OFF control
- Output short circuit protection
- Regulated Output


Summary

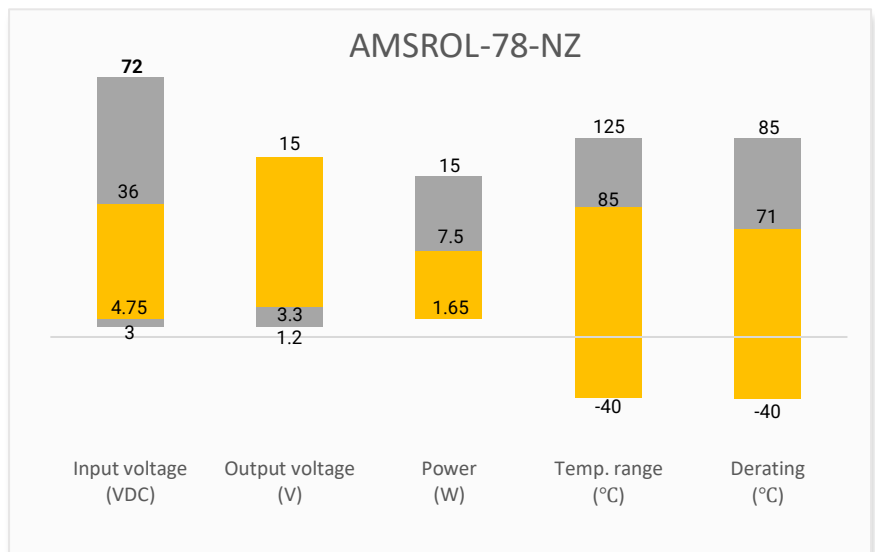

Training

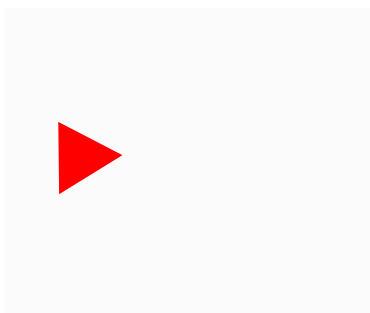

Product Training Video
(click to open)



Application Notes

Applications



IoT



Industrial



Portable Equipment



Telecommunication

Models & Specifications

Single Output

| Model | Input Voltage (VDC) | Output Voltage (VDC) | Output Current Max (mA) | Maximum Capacitive Load (μ F) | Efficiency (%) Full Load |
|----------------|---------------------|----------------------|-------------------------|------------------------------------|--------------------------|
| AMSROL-783.3NZ | 24 (4.75 ~ 36) | 3.3 | 500 | 680 | 86 |
| AMSROL-7805NZ | 24 (6.5 ~ 36) | 5 | 500 | 680 | 90 |
| AMSROL-7809NZ | 24 (12 ~ 36) | 9 | 500 | 680 | 93 |
| AMSROL-7812NZ | 24 (15 ~ 36) | 12 | 500 | 680 | 94 |
| AMSROL-7815NZ | 24 (19 ~ 36) | 15 | 500 | 680 | 95 |

For input voltage exceeding 30 VDC, an input capacitor of 22 μ F/50V is required.

Input Specification

| Parameters | Conditions | Typical | Maximum | Units |
|---------------------------|---|---------|---------|-------|
| Voltage range | See models table | | | VDC |
| No load input current | | 0.2 | 1.5 | mA |
| Filter | Capacitance filter | | | |
| Reverse polarity at input | Avoid / Not protected | | | |
| On/Off Control | ON – 3.2 to 8Vdc or open circuit OFF – 0 to 0.8Vdc or pin4 connected to “-V Input” OFF idle current 0.03mA typ. and 0.1mA max | | | |

* The On/Off Control pin voltage is referenced to input GND.

Output Specification


| Parameters | Conditions | Typical | Maximum | Units | |
|------------------------------|---------------------------|-----------------------------|------------|---------|----------|
| Voltage accuracy | Full load | 3.3V output model | ± 2 | ± 4 | % |
| | | Others | ± 2 | ± 3 | |
| Line regulation | Full load | ± 0.2 | ± 0.4 | % | |
| Load regulation | 10 ~ 100% load | 3.3V,5V output model | ± 0.6 | | % |
| | | Others | ± 0.3 | | |
| Short circuit protection | Continuous, Auto recovery | | | | |
| Temperature coefficient | Full load | | ± 0.03 | %/°C | |
| Ripple & Noise* | 20MHz bandwidth | 3.3V output, 20 ~ 100% load | 20 | 50 | mV pk-pk |
| | | Others, 10 ~ 100% load | 20 | 50 | |
| Transient recovery time | 25% load step change | 200 | 1000 | μ S | |
| Transient response deviation | 25% load step change | ± 50 | ± 200 | mV | |

* With light loads at or below 20%, Ripple & Noise for 3.3V output model increase to 100mVp-p max, and a load below 10% for others model increase to 150mVp-p max


| General Specifications | | | | |
|------------------------------|--|-------------|---------|-------|
| Parameters | Conditions | Typical | Maximum | Units |
| Switching frequency | Full load | 700 | | KHz |
| Operating temperature | With derating at 71 °C | -40 to +85 | | °C |
| Storage temperature | | -55 to +125 | | °C |
| Reflow soldering temperature | Peak temp $\leq 245^{\circ}\text{C}$, 60 sec max at 217°C , please refer to IPC/JEDEC J-STD-020D.1. | | | |
| Cooling | Free air convection | | | |
| Humidity | Non-condensing | | 95 | % RH |
| Weight | | 0.9 | | g |
| Dimensions (L x W x H) | 0.49 x 0.53 x 0.14 inches, 12.50 x 13.50 x 3.50mm | | | |
| MTBF | > 2 000 000 hrs (MIL-HDBK -217F, $t=+25^{\circ}\text{C}$) / Full Load | | | |

| Safety Specifications | | |
|-----------------------|--|--|
| Parameters | | |
| Standards | Designed to meet EN 62368 | |
| | EMC - Conducted and radiated emission | CISPR32/EN55032, CLASS B with recommended circuit |
| | Electrostatic Discharge Immunity | IEC 61000-4-2, Contact $\pm 4\text{KV}$, Criteria B |
| | RF, Electromagnetic Field Immunity | IEC 61000-4-3, 10V/m, Criteria A |
| | Electrical Fast Transient/Burst Immunity | IEC 61000-4-4, $\pm 1\text{KV}$, Criteria B with recommended circuit |
| | Surge Immunity | IEC 61000-4-5, line to line $\pm 1\text{KV}$, Criteria B with recommended circuit |
| | RF, Conducted Disturbance Immunity | IEC 61000-4-6, 3Vr.m.s, Criteria A |


Derating

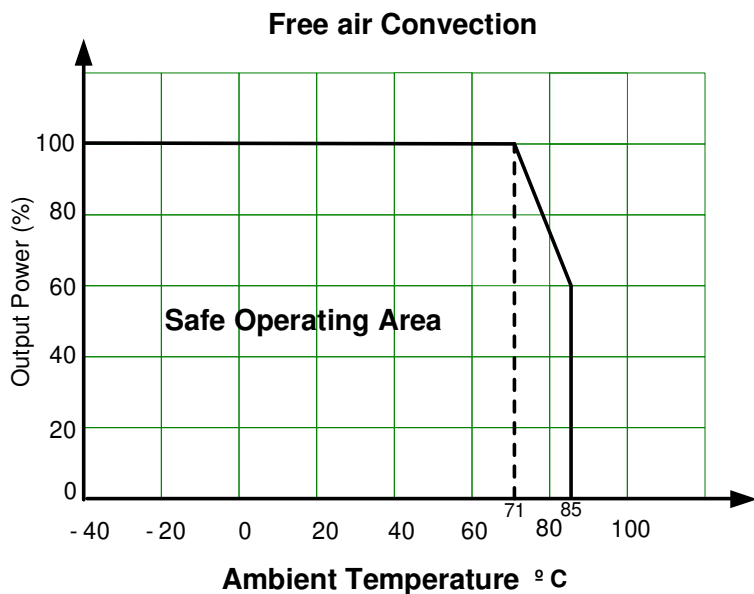


Typical Application Circuit

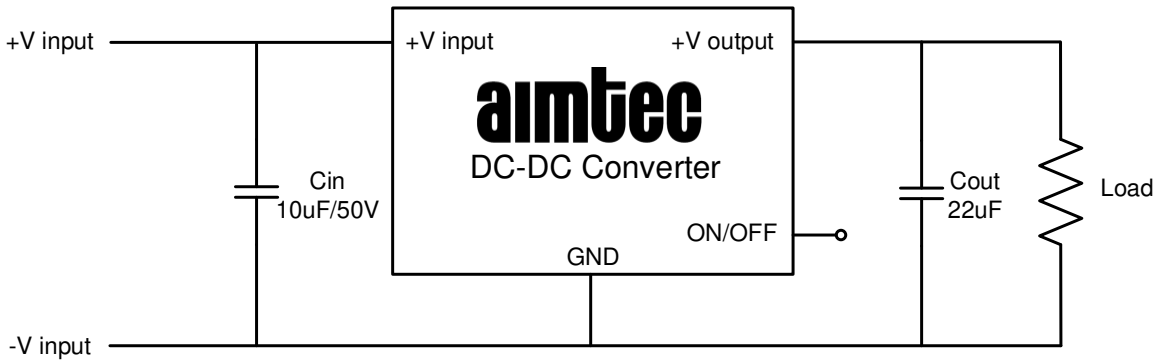

Note : To further reduce the output ripple and noise. We suggested the use of a "LC" filter at the output terminals, with an inductor value (L) of 10uH to 47uH.

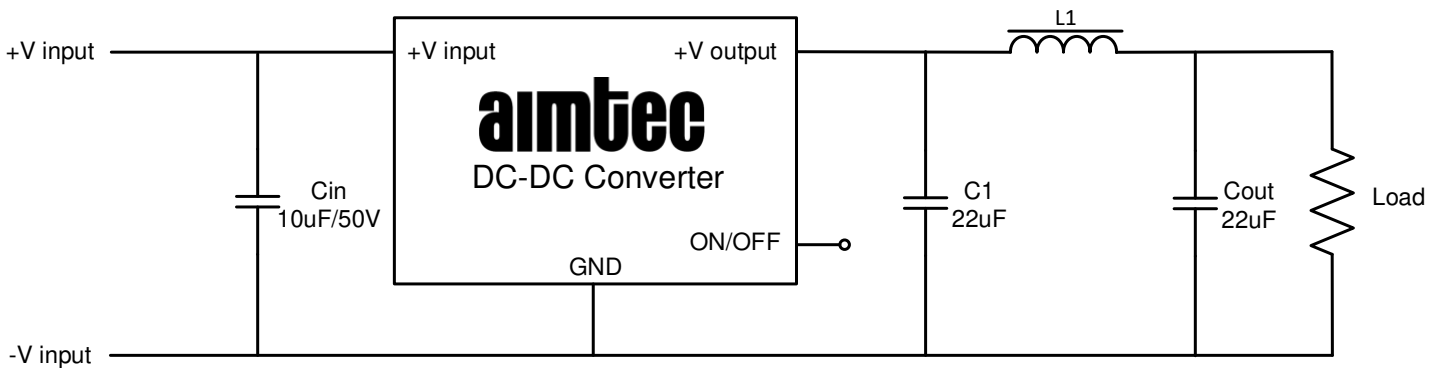


EMC Recommended Circuit

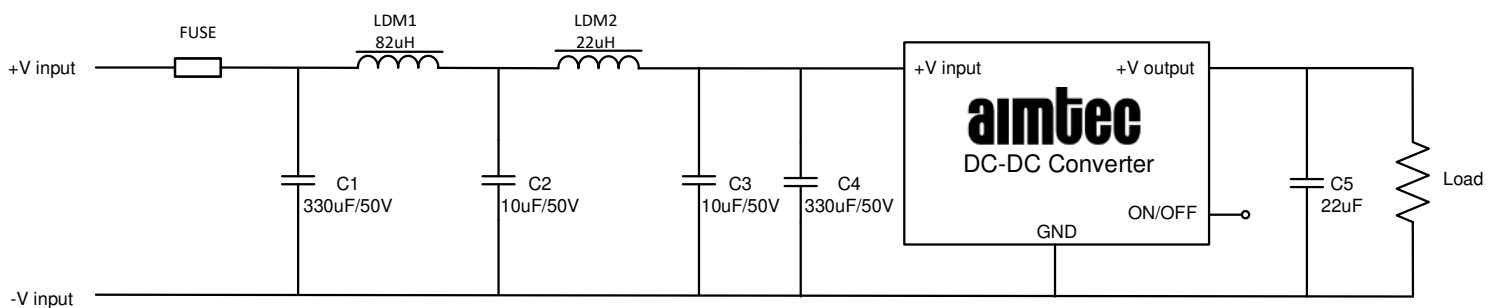


Fuse : Choose according to actual input current.

Dimensions


Top View

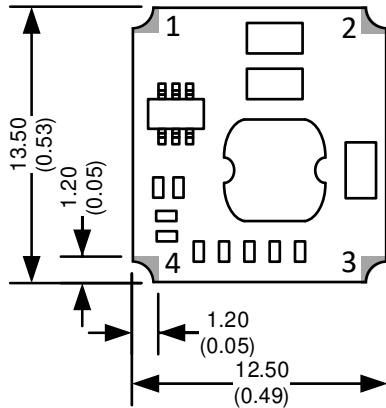


Right View

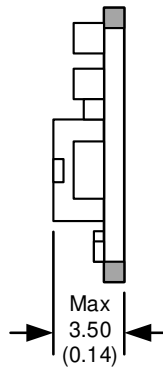

Bottom View

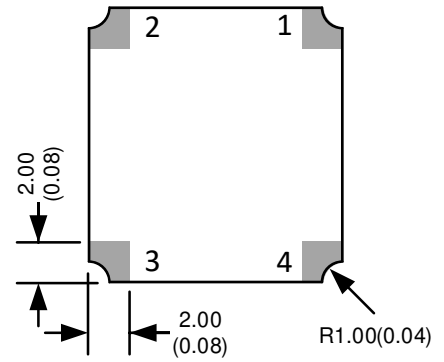

Notes:
All dimensions are typical in millimeters (inches).
General tolerance ± 0.25 (± 0.01)

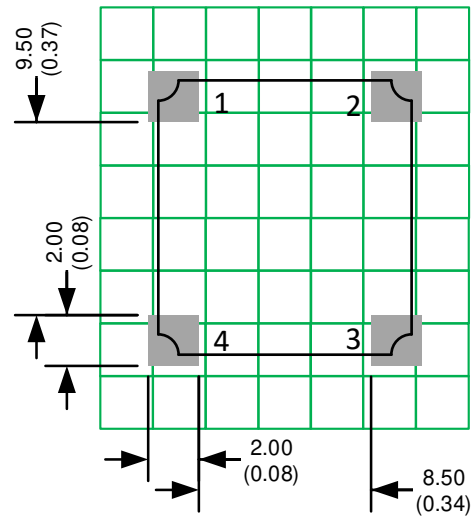

Note : Grid 2.54*2.54 mm

| Pin Out Specifications | |
|------------------------|-----------|
| Pin | Function |
| 1 | +V Input |
| 2 | -V Input |
| 3 | +V Output |
| 4 | ON/OFF |

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.