
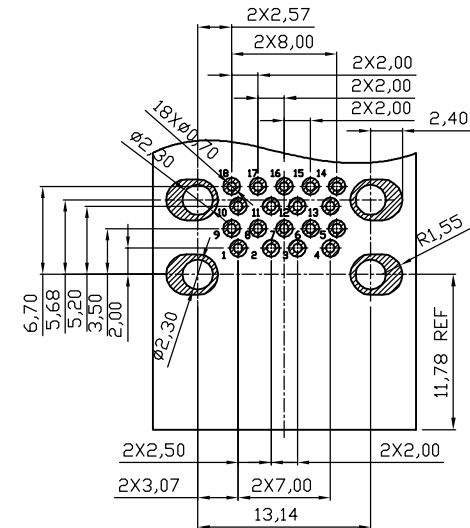
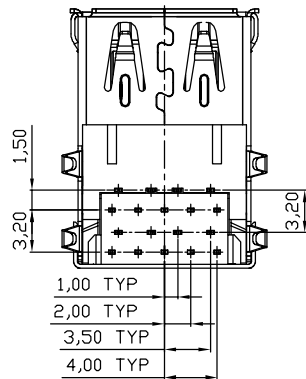
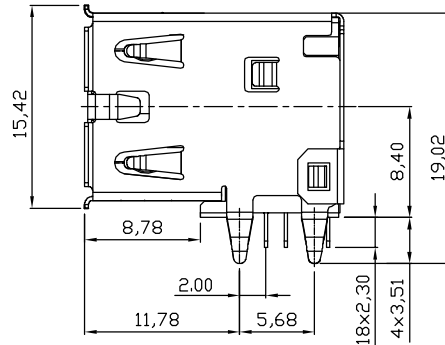


① **USB3.0 COMPLIANT**

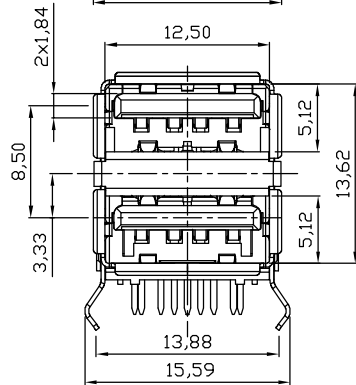

RECOMMENDED P.C.B LAYOUT  
TOLERANCES: ±0.05 mm

**NOTES:**

Material :

Housing: Thermal Plastic UL94HB Color: Blue (PANTONE 300C)

Contacts: Copper alloy, .30u" Gold plating over Nickel (50u"~100u") on Contact area;  
Tin Plating (100u"~200u") on Solder Tail.

Shell: Copper alloy, Tin Plating (Bright).

② **Electronic Characteristic :**

Current Rating:

1.8Amp (Max) Shall be applied to Vbus pin and its corresponding GND pin.

0.25 Amp (Min) shall be applied to all the other contacts.

Voltage - Rating: 30V AC/DC Max.

Mating Cycles: 5,000 cycles min

② **Operating temperature: -20 °C to +85 °C**


Packing: Tray

**RoHS compliant**  
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	01.07.2011	Jason
X.	±0.50					Approved	06.03.2017	Winnie
X.X	±0.30							
X.XX	±0.20	②	Add Electronic data&operating temp.	06.03.2017	Winnie			
DIM TOL		①	Add the"USB3.0 COMPLIANT"	24.03.2014	Winnie			
X.°	±5°							
X.X°	±X°	③	Drawn	01.07.2011	Jason			
Angle	TOL	Id.	Modification	Date	Name			



Customer-No.		
ASSMANN WSW-No.		
<b>A-USB3 A-2P</b>		
Drawing-No.		
<b>ASS 4530 CO</b>	rev02	
Replace	1/2	

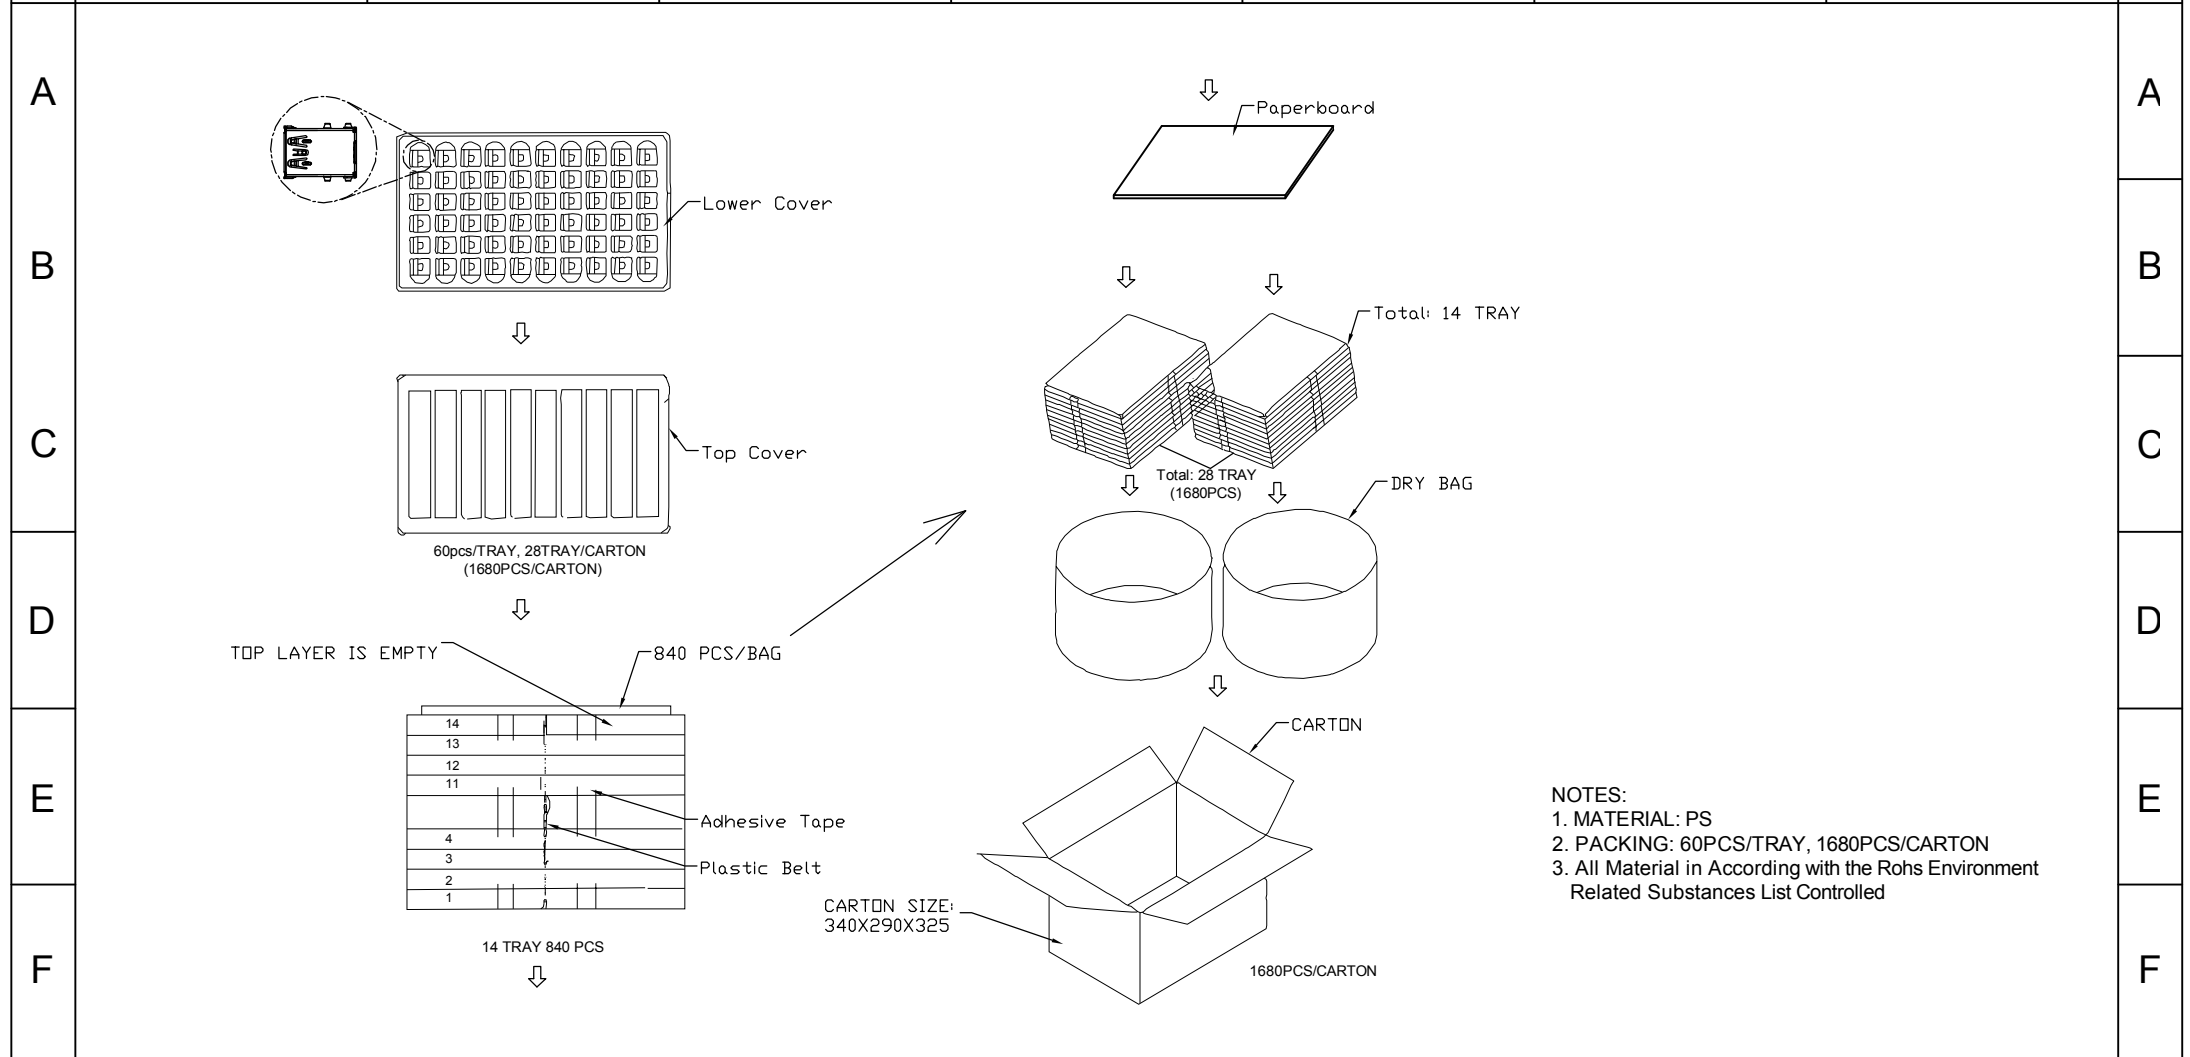

NOTES:  
 1. MATERIAL: PS  
 2. PACKING: 60PCS/TRAY, 1680PCS/CARTON  
 3. All Material in According with the Rohs Environment Related Substances List Controlled

RoHS compliant  
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	01.07.2011	Jason
X.	±0.50					Approved	06.03.2017	Winnie
X.X	±0.30							
X.XX	±0.20	②	Add Electronic data&operating temp.	06.03.2017	Winnie			
DIM	TOL	①	Add the"USB3.0 COMPLIANT"	24.03.2014	Winnie			
X.°	±5°							
X.X°	±X°	③	Drawn	01.07.2011	Jason			
Angle	TOL	Id.	Modification	Date	Name			

Drawing-No.		ASS 4530 CO		rev02
Replace				2/2