



Laser/Ink Jet Labels

PANDUIT[®]

infrastructure for a connected world

Laser/Inkjet Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industrial applications – including electrical, electronics, industrial, and network. Panduit offers a complete leading-edge line of labeling software and high-performance label materials (all RoHS compliant) that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements. Laser/Inkjet Labels are on 8.5" x 11" sheets.

Representative offering only,
visit www.panduit.com for a
complete listing of products.



Cable/Wire Labels	
Turn-Tell® Labels.....	4
Self-Laminating Polyester Labels.....	5
Self-Laminating Tedlar® Labels	6
LabelCore™ Fiber Optic Cable Identification System.....	6
Non-Laminated Polyolefin Labels	7
Component Labels	
Polyester Component Labels	8
Tedlar® Component Labels.....	9
Non-Adhesive Polyester Network Labels.....	9
Polyolefin Network Labels	10
Labeling Software	
Easy-Mark Plus™ Software	10

Tedlar is a registered trademark of E. I. du Pont de Nemours and Company.

Turn-Tell® Labels

PATENTED



- Labels rotate and slide along cables after installation for visibility from any angle, and allow repositioning on the wire/cable to align legends for improved aesthetics
- Ideal for use in high-density or space-constrained cable applications
- Eliminate the need to disconnect wire or replace label in the event of re-termination
- Temperature range: -65°F to 225°F (-54°C to 107°C)



FEATURED

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg
		in	mm	in	mm	in	mm	in	mm	in	mm				
R050X075X1J	White	0.50	12.7	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG / 18 – 14 AWG	12	84	5000
R050X125X1J				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP / 12 – 10 AWG		60	
R050X150X1J				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP / Cat. 6UTP / Cat. 6A UTP / Cat. 5e FTP / 10 – 6 AWG		48	
R100X075X1J				0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG / 18 – 14 AWG		42	
R100X125X1J	TIA Blue	1.00	25.4	1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP / 12 – 10 AWG	6	30	1000
R100X150X1J				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP / Cat. 6 UTP / Cat. 6A UTP / Cat. 5e FTP / 10 – 6 AWG		24	
R100X150X2J				2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP / Cat. 6A UTP / Cat. 6A FTP / 8 – 4 AWG		18	
R100X150X7J				4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG		12	
R100X150X8J	TIA Red	1.50	38.1	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP / Cat. 6 UTP / Cat. 6A UTP / Cat. 5e FTP / 10 – 6 AWG	4	16	500
R100X225X1J	White			2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP / Cat. 6A UTP / Cat. 6A FTP / 8 – 4 AWG		9	
R100X400X1J	White			4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG		6	
R150X150X1J				1.50	38.1	1.50	38.1	0.50	12.7	0.22	5.6	0.28		7.1	
R200X150X1J	White	2.00	50.8	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP / Cat. 6A UTP / Cat. 6A FTP / 8 – 4 AWG	3	9	500
R200X225X1J				4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG		6	
R200X400X1J				1.50	38.1	1.50	38.1	0.50	12.7	0.22	5.6	0.28		7.1	

Order number of labels required in multiples of Standard Package Quantity.

Self-Laminating Polyester Labels



- Include a colored print-on area and clear over-laminate to protect the legend for clear and durable identification
- Labels are sized specifically for wire and cable applications
- Provide durability; high-temperature resistance, and dimensional stability; do not stretch or easily tear; preferred material for wire/cable labeling
- White labels are ASTM E-595 rated for airspace handling
- Temperature Range: -65°F to 225°F (-54°C to 107°C)
- For YAJ parts only: UL recognized, UL969, File # MH14979

	Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg		
			in	mm	in	mm	in	mm	in	mm	in	mm						
FEATURED	S050X075YAJ	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	13	169	5000		
FEATURED	S050X125YAJ				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG		104			
FEATURED	S050X150YAJ				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		78			
FEATURED	S075X075YAJ		0.75	19.1	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	9	117	2500		
FEATURED	S075X125YAJ				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG		72			
FEATURED	S075X150YAJ				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		54			
FEATURED	S100X075YAJ		TIA Blue	1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	7	91	2500	
FEATURED	S100X125YAJ					1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG		56		
FEATURED	S100X150YAJ					1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		42		
FEATURED	S100X150YBJ																	TIA Green
FEATURED	S100X150YDJ																	TIA Orange
FEATURED	S100X150YFJ					TIA Red												
FEATURED	S100X150YHJ	TIA Yellow																
BEST SELLER	S100X225YAJ	White		1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UPT/Cat. 6A FTP/8 – 4 AWG	8	32	1000	
	S100X225YBJ	TIA Blue																
	S100X225YDJ	TIA Green																
	S100X225YFJ	TIA Orange																
	S100X225YHJ	TIA Red																
	S100X225YIJ	TIA Yellow																
FEATURED	S100X400YAJ	White	1.00	25.4	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	7	14	1000		
FEATURED	S100X650YAJ	White			6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 350 MCM		7			
	S150X400YAJ	White	1.50	38.1	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	5	14			
FEATURED	S200X150YAJ	White	2.00	50.8	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	24	1000		
FEATURED	S200X225YAJ	White			2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UPT/Cat. 6A FTP/8 – 4 AWG		16			
FEATURED	S200X400YAJ	White			4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG		8			
FEATURED	S200X650YAJ	White			6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 350 MCM		4	500		

Order number of labels required in multiples of Standard Package Quantity.

Self-Laminating Tedlar® Labels




- Include a colored print-on area and clear over-laminate to protect the legend for clear and durable identification
- Labels are sized specifically for wire and cable applications
- Labels are self-extinguishing
- Temperature range: 0°F to 275°F (-18°C to 135°C)
- UL Recognized: UL969, File # MH 14576, CUL Recognized: C22.2 No 0.15-01, File # MH 14576

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg
		in	mm	in	mm	in	mm	in	mm	in	mm				
S100X150TAJ-A	White	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	7	42	2500

Tedlar® is a registered trademark of E. I du Pont de Nemours and Company.

LabelCore™ Fiber Optic Cable Identification System

PATENTED



- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeve is made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot


FEATURED

FEATURED

Part Number	Color	Part Description	Std Pkg Qty
NWSLC-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VATY (Thermal Transfer Printer).	100
NWSLC-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAM (MP300 Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	
NWSLC2-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, 100 per pack, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer).	

Order number of sleeves by Standard Package Quantity.

Non-Laminated Polyolefin Labels

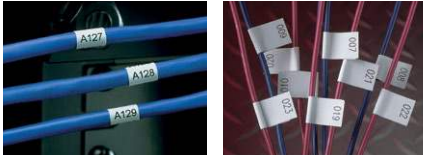

- Use as wrap-around label or flag-style marker for wire/cable labeling
- Conformable material for general identification

- Temperature range: -40°F to 180°F (-40°C to 82°C)

Part Number	Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg
		in	mm	in	mm	in	mm	in	mm				
N025X075FJJ	White	0.25	6.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	25	275	10000
N025X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	67	150	
N050X075FJJ		0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	14	154	
N050X125FJJ				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		98	
N050X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		84	
N100X075FJJ		1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	77	5000
N100X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		42	

Order number of labels required in multiples of Standard Package Quantity.

Polyester Component Labels



- Used to identify patch panels, faceplates, punch-down blocks, and other network systems hardware
- Used to identify electrical and electronic components and devices
- Temperature range: -40°F to 311°F (-40°C to 154°C)
- UL recognized, UL969, File# MH14979
- cUL recognized, C22.2 No. 0.15-01, File# MH14979

Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg
		in	mm	in	mm			
C038X038YJJ	White	0.38	9.7	0.38	9.7	16	352	10000
C050X044YJJ		0.50	12.7	0.44	11.2	13	247	
C060X020YJJ		0.60	15.2	0.20	5.1	11	385	
C075X025YJJ		0.75	19.1	0.25	6.4	9	270	
C075X050YJJ				0.50	12.7		153	
C080X020YJJ		0.80	20.3	0.20	5.1	8	280	
C100X025YJJ		1.00	25.4	0.25	6.4	7	210	
C100X038YJJ				0.38	9.7		140	
C100X050YJJ				0.50	12.7		119	
C100X075YJJ				0.75	19.1		84	
C150X050YJJ		1.50	38.1	0.50	12.7	5	80	
C150X075YJJ				0.75	19.1		60	
C160X020YJJ		1.60	40.6	0.20	5.1	4	140	
C200X050YJJ		2.00	50.8	0.50	12.7		64	
C200X100YJJ				1.00	25.4	28		
C275X125YJJ		2.75	69.9	1.25	31.8	6	18	
C300X038YJJ		3.00	76.2	0.38	9.7	2	40	
C300X100YJJ				1.00	25.4		18	
C400X100YJJ		4.00	101.6	1.00	25.4		20	
C400X200YJJ				2.00	50.8		10	
C400X400YJJ				4.00	101.6	4		
C788X050YJJ		7.88	200.2	0.50	12.7	1	16	
C850X1100YJJ		8.50	215.9	11.00	279.4		1	1

Order number of labels required in multiples of Standard Package Quantity.

Tedlar® Component Labels



- Self-extinguishing and ideal for labeling high-temperature areas
- Temperature range: -40°F to 275°F (-40°C to 135°C)
- UL969 recognized, File # MH 14576, CUL recognized, C22.2 No 0.15-01, File # MH 14676

Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg
		in	mm	in	mm			
C050X125TJJ	White	0.5	12.7	1.25	31.8	5	80	1000
C090X025TJJ		0.9	22.9	0.25	6.4	8	224	5000
C100X038TJJ		1	25.4	0.38	9.7	7	140	
C200X038TJJ		2	50.8	0.38	9.7	3	60	1000

Order number of labels required in multiples of Standard Package Quantity.

Tedlar® is a registered trademark of E. I du Pont de Nemours and Company.

Non-Adhesive Polyester Network Labels



- Used to identify patch panels, faceplates, and other systems hardware
- Die-cut labels designed to provide maximum aesthetic quality and appearance
- Temperature range: -10°F to 150°F (-23°C to 65°C)

Part Number	Color	Width		Height		Application	Labels Per Row	Labels Per Sheet	Labels Per Pkg
		in	mm	in	mm				
C150X030Y1J	White	1.5	38.1	0.3	7.6	3-port identifier	4	112	1000
C195X040Y1J		1.95	49.5	0.4	10.2	Single-gang faceplate	3	60	
C261X035Y1J		2.61	66.3	0.35	8.9	4-port identifier	2	48	
C390X030Y1J		3.9	99.1	0.3	7.6	6-port identifier		48	

Order number of labels required in multiples of Standard Package Quantity.

Polyolefin Network Labels



- Used to identify patch panels, faceplates, and other systems hardware
- Used to identify electrical and electronic components and devices
- Temperature range: -40°F to 180°F (-40°C to 82°C)

Part Number	Color	Width		Height		Type of Application	Labels Per Row	Labels Per Sheet	Labels Per Pkg
		in	mm	in	mm				
C061X030FJJ	White	0.61	15.5	0.30	7.6	1-port identifier	13	325	5000
C125X030FJJ		1.25	31.8	0.30	7.6	2-port identifier	6	150	2500
C138X019FJJ		1.38	35.1	0.19	4.8	Module identifier	5	170	
C188X030FJJ		1.88	47.8	0.30	7.6	3-port identifier	4	100	1000
C200X100FJJ		2.00	50.8	1.00	25.4	General Identifier		36	
C252X030FJJ		2.52	64.0	0.30	7.6	4-port identifier	3	75	
C261X030FJJ		2.61	66.3	0.30					
C379X030FJJ		3.79	96.3	0.30	7.6	6-port identifier	2	50	

Order number of labels required in multiples of Standard Package Quantity.

Easy-Mark Plus™ Labeling Software

PATENTED

- Quickly create complex labels or design detailed labels with multiple zones and objects
- Advanced features such as “drag and drop” functionality and wizard tools
- Labels appear on-screen as they will when printed, eliminating guesswork
- Multiple versions available for greater flexibility
- Use with all existing Panduit Easy-Mark™ and Pan-Mark™ files designed in the past, or update them with new objects and styling

System Requirements:

- 300 MB hard drive space and 2 GB Memory
- 32 or 64-bit operating systems
- Windows 7, 8, 8.1, or 10
- Microsoft.NET Framework 4.0 or higher
- Mouse or compatible pointing device
- Keyboard
- Optical Disc Drive or USB Port



FEATURED

Part Number	Description	Std Pkg Qty	Std Pkg Qty
EMPLUS-CD	Easy-Mark Plus™ Labeling Software, CD-ROM	1	10
EMPLUS-DL	Easy-Mark Plus™ Labeling Software, online download		
EMPLUS-2GO	Easy-Mark Plus™ Labeling Software, USB Flash Drive		
EMPLUS-SERVER	Easy-Mark Plus™ Labeling Software, networkable server based version		

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.



PANDUIT®

Panduit Corp.
World Headquarters
Tinley Park, IL 60487

cs@panduit.com

US and Canada: 800.777.3300

Europe, Middle East, and Africa:

44.20.8601.7200

Latin America: 52.33.3777.6000

Asia Pacific: 65.6305.7575

www.panduit.com