


Eveready 1212

AAA




Industry Standard Dimensions

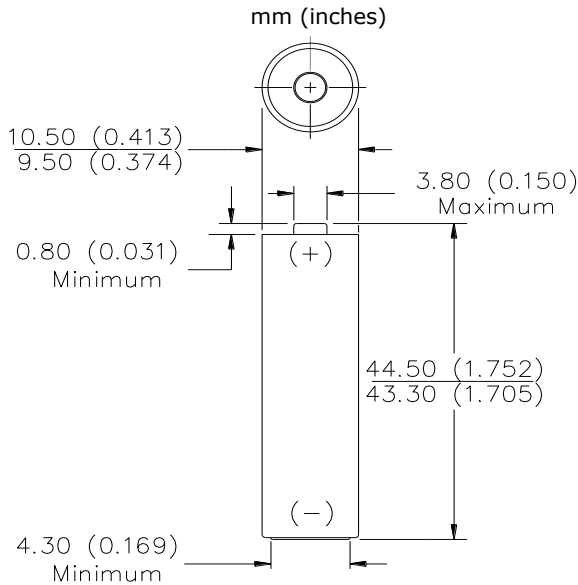





Specifications

- Classification:** "Carbon Zinc" **Super Heavy Duty**
- Chemical System:** Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)
- Designation:** ANSI-24D, IEC-R03
- Nominal Voltage:** 1.5 Volts
- Typical Capacity:** 540 mAh to 0.8 volts
(Rated at 25 mA continuous at 21°C)
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Typical Weight:** 7.3 + 0.1 grams (0.257 oz)
- Typical Volume:** 4.0 cubic centimeters (0.2 cubic inch)
- Cell:** One No. 12 (size "AAA")
- Jacket:** Plastic Label

Industry Standard Test (21°C)

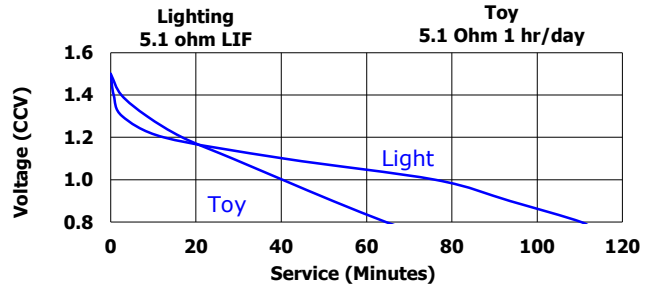

Industry Standard Tests (21°C)

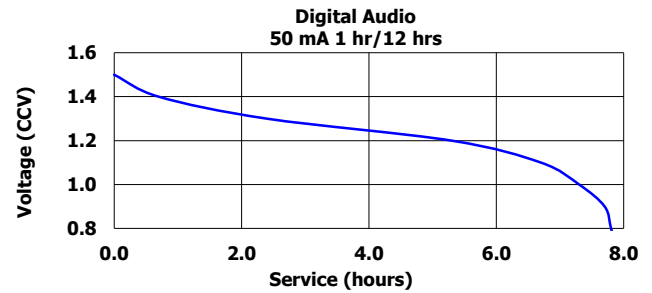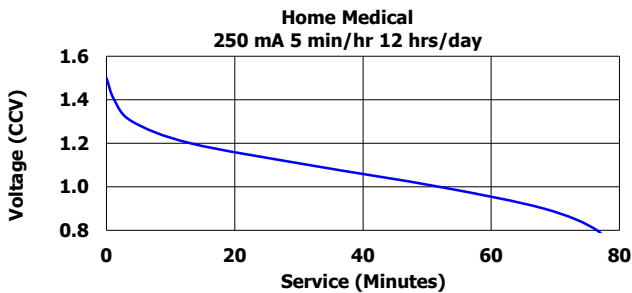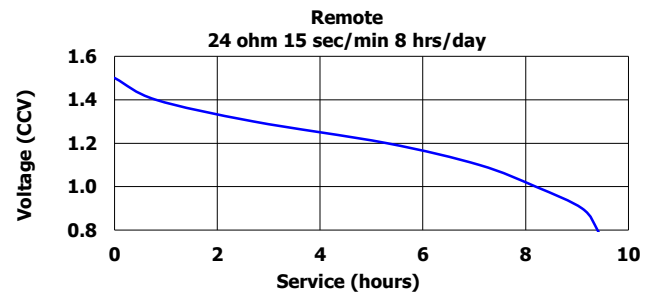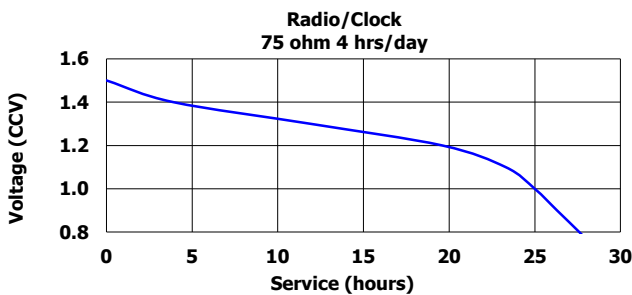

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.