

Type LPS-08

“Add-On” Automotive Fuse Holder

Mini Automotive Low Profile

Blade Type Fuse



www.optifuse.com

(619) 593-5050

Rating: 58VDC

Max Combined Current - Both Circuits - 30A

Max Primary Circuit - 25A

Max Auxiliary Circuit - 15A


Body Material: Thermoplastic


For use with Type APS Fuse (Mini-Automotive Low Profile Blade Type)

Wire: 16 AWG Red Wire

Connector: Butt-Splice Connector

Mechanical Dimensions: Inches [mm]

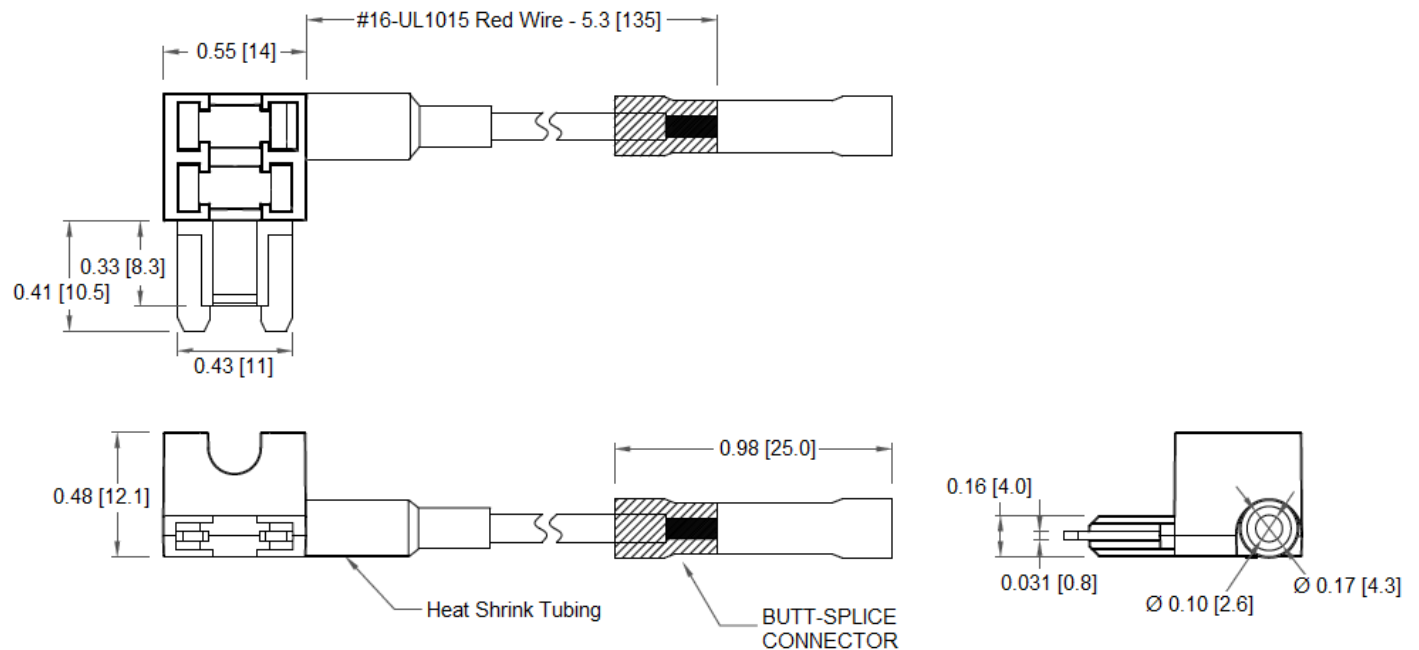

<p>Warning:</p> 	<ul style="list-style-type: none"> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. -Device is intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated. -Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.
--	--