


### RAST | RAST 5 IDC Connectors

TE Internal #: 2-1971846-2 PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors

#### View on TE.com >

#### Connectors > PCB Connectors > PCB Headers & Receptacles

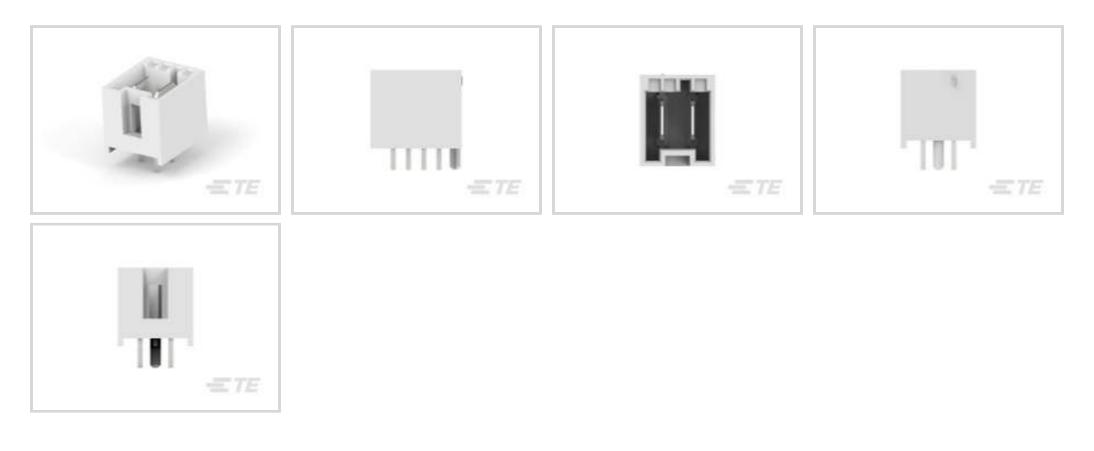

Connector System: Wire-to-Board

Number of Positions: 2

Number of Rows: 1

Centerline (Pitch): 5 mm [.197 in ]

PCB Mount Orientation: Vertical

## Features

**E T E connectivity** 

### Product Type Features

Connector System	Wire-to-Board	
Header Type	Fully Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
PCB Connector Assembly Type	PCB Mount Header	
Configuration Features		
Keying & Polarized Position Locations	1C, 2D	
Number of Columns	2	
Number of Positions	2	
Number of Rows	1	
PCB Mount Orientation	Vertical	
Electrical Characteristics		
Operating Voltage	250 VAC	
Body Features		

PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Primary Product Color	Natural
Contact Features	
PCB Contact Termination Area Plating Material Thickness	1 μm[39.37 μin]
Contact Layout	Inline
Mating Tab Width	6.3 mm[.248 in]
Mating Tab Thickness	.8 mm[.032 in]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Shape & Form	Rectangular
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Silver
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Silver
Contact Type	Tab
Contact Current Rating (Max)	20 A



#### **Termination Features**

Square Termination Post & Tail Dimension	.8 mm[.032 in]			
Termination Post & Tail Length	3.5 mm[.13 in]			
Termination Method to Printed Circuit Board	Through Hole - Solder			
Mechanical Attachment				
PCB Mount Alignment Type	Polarizing Pegs			
Mating Alignment Type	Keyed			
Mating Retention	With			
Mating Retention Type	Latch			
Connector Mounting Type	Board Mount			
Mating Alignment	With			
PCB Mount Alignment	With			
PCB Mount Retention	Without			
Housing Features				
Housing Material	Nylon			

PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Length	12.3 mm[.48 in]
Connector Height	12.8 mm[.5 in]
Connector Width	14.9 mm[.58 in]
Usage Conditions	
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Agency/Standard	UL, VDE
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	162
r ackaging Quantity	

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors




will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**







## Also in the Series | RAST 5 IDC Connectors

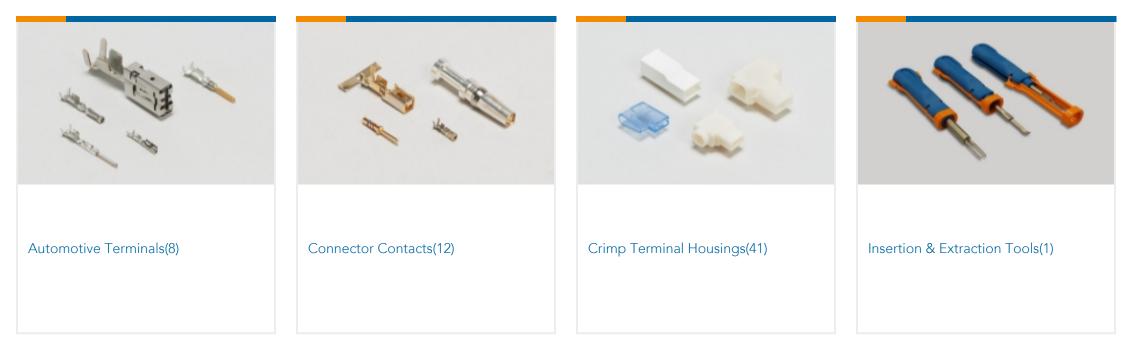

PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors




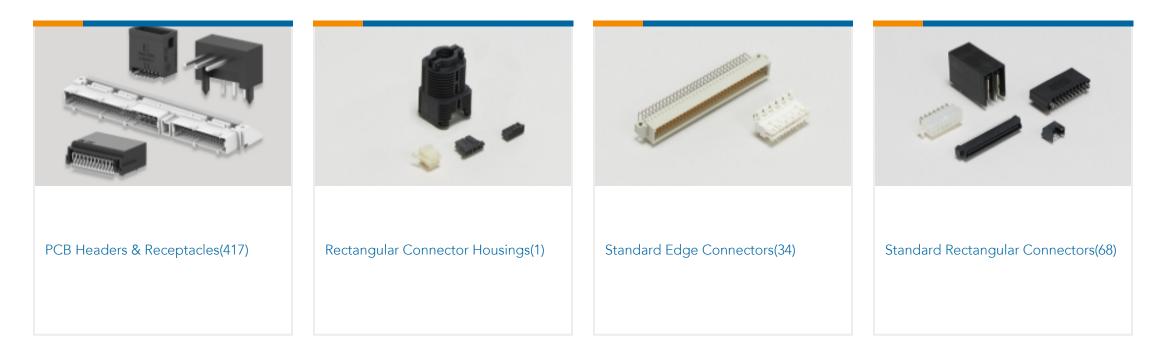

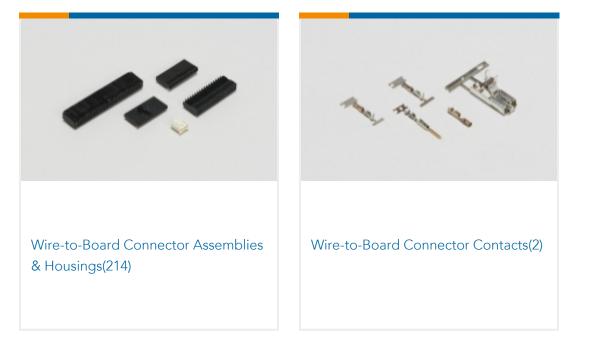

# Customers Also Bought



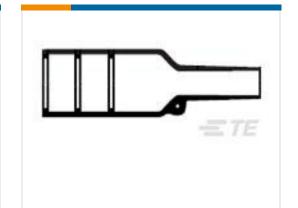






TE Part #2314824-6 6P,2MM,B-B,REC,DRVT,2.7,0.1AU,TB, W/CAP	TE Part #273590-000 202K174-3/86-0	TE Part #YDTS24F13-08SCV001 RECP ASSY	TE Part #D863823001 99M0121-18-2/6
III		TE TE	
TE Part #8-1879131-3 RN 0402 11K3 0.1% 10PPM 1K RL	TE Part #769665-000 ST63-5-55-22-9	TE Part #2-2176455-8 CPF 0402 8R06 0.1% 25ppm 1K RL	TE Part #9-2176367-6 RQ 0603 45K3 0.1% 10PPM 1K RL

## Documents

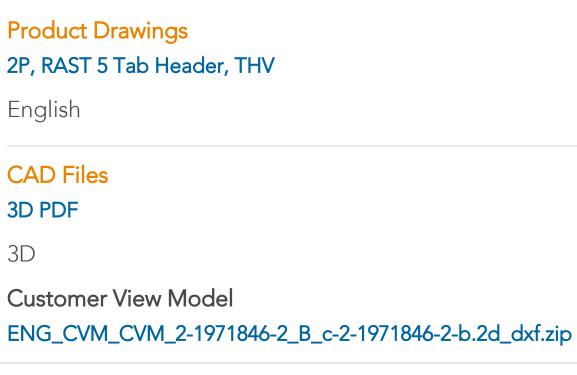

PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



English

Customer View Model ENG\_CVM\_CVM\_2-1971846-2\_B\_c-2-1971846-2-b.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-1971846-2\_B\_c-2-1971846-2-b.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the  $\ensuremath{\mathsf{Terms}}\xspace$  and  $\ensuremath{\mathsf{Conditions}}\xspace$  of use.

Datasheets & Catalog Pages 7-1773465-5 RAST5.0 Flyer

English

**Product Specifications** 

**Product Specification** 

English

Agency Approvals VDE Certificate

English