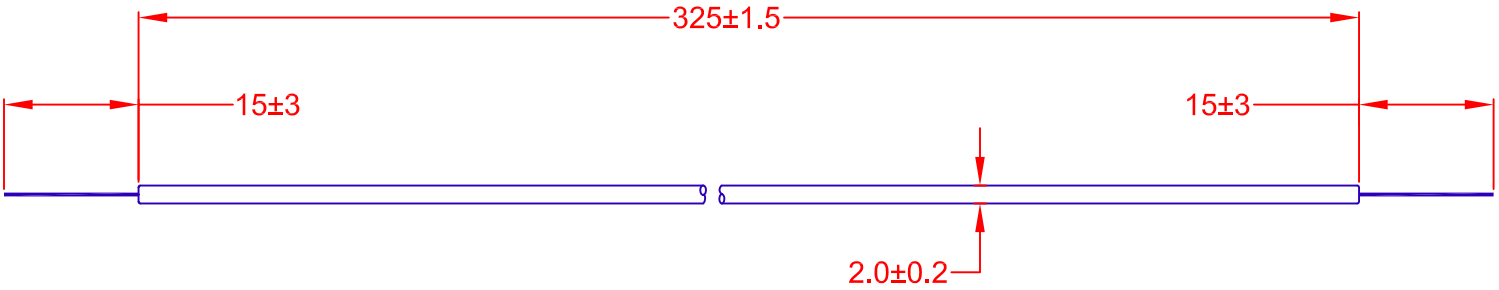

JKL LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (Cd/m2)	*RATED LIFE (HRS)
CF20325-24B	8400 Kelvin x = .290 REF. y = .305 REF.	**1830 MAX.	735 @ 5mA	5.0 TYP. 7.0 MAX.	46,000 TYP.	20,000 MIN. 40,000 AVG.

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OFTHE INITIAL RATING.

**MAY BE HIGHER WHEN MOUNTED IN METAL RAIL AND USING INPUT HARNESS, REF. 2250 Vrms Max. @ 0 C.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	CHANGE BRIGHTNESS TO 46,000 TYP.	5/3/05
	RELEASED	4/15/04

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0
ANGLE +/- 0

DRAWN BY L. WENGSTROM | APPV'D BY J.K. | DATE 5/3/05

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

JKL COMPONENTS CORPORATION

TITLE
MINIATURE COLD CATHODE FLUORESCENT LAMP

SIZE A | FSCM NO. 55335 | DRAWING NO. CF20325-24B

SCALE NONE | RELEASED DATE 4/15/04 | REVISION DATE 5/3/05 | REV. NO. A | SHEET 1 OF 1