





Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

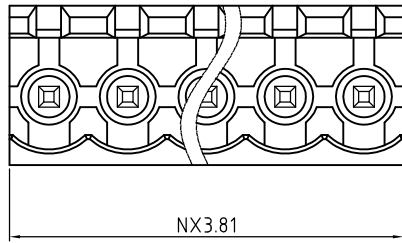

N=Number of contacts

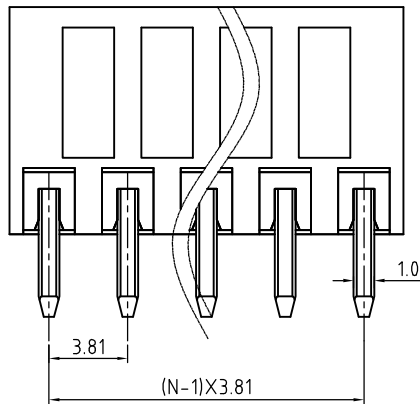

PCB. LAYOUT

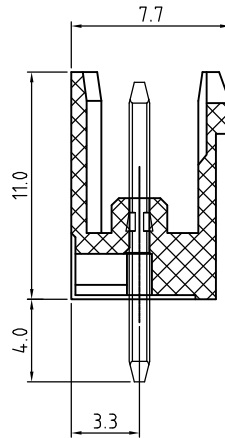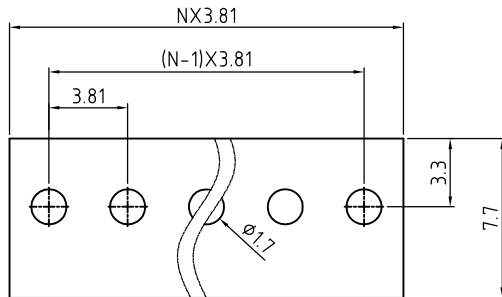

Technical Data:

Electrical

- Pitch: 3.81mm
- Voltage rating: 300V
- Current rating: 12 Amps
- Withstanding Voltage: 2500VAC(1min)

Mechanical:

- Operating temperature: -40°C to +105°C
- Soldering temperature
- Temperature= 250°C±10°C /5 seconds max
- Safety approval:
- RoHS Compliance

Part No.:

OSTVEXX3050

| | |
|--------------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Poles | 0: Black |
| 03 3 Poles | 2: Red |
| | 3: Orange |
| 24 24 Poles | 4: Yellow |
| | 5: Green (Standard) |
| Nonstandard colors | 6: Blue |
| Mins could apply | 8: Grey |

| | | | | |
|------|--------------|------------------|---------------------|---------------|
| 2 | Pin | Copper Alloy | Tin plated | 1xN |
| 1 | Body | PA66-30%GF UL94V | | 1 |
| ITEM | NAME OF PART | MATERIAL | NOTES | Q"TY |
| DWG. | DATE | UNITS: | MM | SHEET: 1 OF 1 |
| CHK. | DATE | SCALE: | NONE 4:1 (:) | REV.: A |
| APP. | DATE | TITLE: | OSTVE SERIES 3.81MM | X. ±0.50 |
| | | | OEPN VERTICAL | X.XX ±0.30 |
| | | PART NO.: | OSTVEXX3050 | X° ±1° |
| | | DWG NO.: | OSTVEXX3050.DWG | |

| REV | △ | SIGN | DESCRIPTION | CHK. | DATE |
|-----|---|------|-------------|------|------|
|-----|---|------|-------------|------|------|



ON-SHORE TECHNOLOGY, INC.