



**Pb-free  
HEAT**



# 1105W Series

Single Color Dome Lens Type  
(High Reliability type, V-Series)

## Product features

|                             |   |
|-----------------------------|---|
| Package                     | 3216 fixed lens type, Water clear epoxy   |
| Product features            | <ul style="list-style-type: none"> <li>• Outer Dimension 3.2 x 1.6 x 1.85mm( L x W x H )</li> <li>• Wide operation temperature range.<br/>Storage Temperature : InGaN : -40°C~110°C<br/>: AlGaInP : -40°C~120°C<br/>Operating Temperature : -40°C~100°C Operation Guarantee</li> <li>• Ramification of luminosity group sorting. It is possible to have a uniform transmission with little irregularities even when several are lined up.</li> <li>• Systematization of luminosity groups and color tone groups. Unified to a simple standard.</li> <li>• Corresponding to a use requiring high reliability in cars etc...</li> <li>• Surface Mount Type and Reverse Mount Type are possible.</li> <li>• Shape resin into a lens to make high luminosity possible.</li> <li>• Lead-free soldering compatible</li> <li>• RoHS compliant</li> </ul> |
| Dominant wavelength         | Blue : 470nm (VUB)<br>Green : 530nm (VUG) , 562nm(VYBG)<br>Yellow Green : 572nm (VYPY)<br>Yellow : 590nm (VFY)<br>Orange : 605nm (VFA)<br>Red : 615nm (VFV) , 626nm (VFR)   |
| Spatial distribution        | VUB,VUG : 20deg. VYBG,VYPY,VFY,VFA,VFV,VFR : 40 deg.  |
| Die materials               | VUB,VUG : InGaN VYBG, VYPY, VFY, VFA, VFV, VFR :AlGaInP   |
| Optical efficiency          | VUB : 10.9lm/W                      VUG : 23.6lm/W<br>VYBG : 1.3lm/W                      VYPY : 4.8lm/W<br>VFY : 11.8lm/W                      VFA : 11.8lm/W<br>VFV : 13.2lm/W                      VFR : 11.8lm/W  |
| Rank grouping parameter     | Sorted by luminous intensity and wavelength and taped according to rank.  |
| Assembly methods (customer) | Corresponding to surface mounter.   |
| Soldering methods           | Corresponding to reflow soldering and manual soldering.   |
| Taping dimensions           | 2,000pcs(standard) per reel in a 8mm width tape.<br>Reel diameter : $\phi$ 180mm  |
| ESD                         | AlGaInP:2kV (HBM)                      InGaN:1kV (HBM)  |

## Recommended Applications

SW lighting for car indicators, meter panel, car audio and heater control, etc...

## Color Variations and Luminous Intensity

(Ta=25°C)

| Part No.  | Material | Emitted Color | Lens Color  | Dominant Wavelength |       | Luminous Intensity |       |       | Luminous Flux  |       |
|-----------|----------|---------------|-------------|---------------------|-------|--------------------|-------|-------|----------------|-------|
|           |          |               |             | $\lambda d$ (nm)    |       | $I_v$ (mcd)        |       |       | $\phi v$ (mlm) |       |
|           |          |               |             | TYP.                | $I_F$ | MIN.               | MAX.  | $I_F$ | TYP.           | $I_F$ |
| VUB1105W  | InGaN    | Blue          | Water Clear | 470                 | 10    | 120                | 470   | 10    | 350            | 10    |
| VUG1105W  | InGaN    | Green         |             | 530                 | 10    | 560                | 2,200 | 10    | 780            | 10    |
| VYBG1105W | AlGaInP  |               |             | 562                 | 20    | 39                 | 150   | 20    | 55             | 20    |
| VYPY1105W | AlGaInP  | Yellow Green  |             | 572                 | 20    | 100                | 390   | 20    | 200            | 20    |
| VFY1105W  | AlGaInP  | Yellow        |             | 590                 | 20    | 330                | 1,200 | 20    | 450            | 20    |
| VFA1105W  | AlGaInP  | Orange        |             | 605                 | 20    | 330                | 1,200 | 20    | 450            | 20    |
| VFV1105W  | AlGaInP  | Red           |             | 615                 | 20    | 560                | 820   | 20    | 500            | 20    |
| VFR1105W  | AlGaInP  |               |             | 626                 | 20    | 330                | 1,200 | 20    | 450            | 20    |

※Note : The luminous intensity( $I_v$ ) and dominant wavelength ( $\lambda d$ ) above are the setup values of the sorting machine.

(Tolerance :  $I_v$ ...  $\pm 10\%$ ,  $\lambda d$  ...  $\pm 1$ nm)

## Absolute Maximum Ratings

(Ta=25°C)

| Item                            | Symbol           | Absolute Maximum Ratings |        |      |          |      |      |      |      | Unit  |
|---------------------------------|------------------|--------------------------|--------|------|----------|------|------|------|------|-------|
|                                 |                  | VUB                      | VUG    | VYBG | VYPY     | VFY  | VFA  | VFV  | VFR  |       |
| Power Dissipation               | $P_d$            | 84                       | 84     | 81   | 81       | 78   | 78   | 78   | 78   | mW    |
| Forward Current                 | $I_F$            | 20                       | 20     | 30   | 30       | 30   | 30   | 30   | 30   | mA    |
| Pulse Forward Current ※1        | $I_{FRM}$        | 48                       | 48     | 100  | 100      | 100  | 100  | 100  | 100  | mA    |
| Derating<br>(Ta=75°C or higher) | $\Delta I_F$     | 0.40※2                   | 0.40※2 | 1.0  | 1.0      | 1.0  | 1.0  | 1.0  | 1.0  | mA/°C |
|                                 | $\Delta I_{FRM}$ | 0.96※2                   | 0.96※2 | 3.33 | 3.33     | 3.33 | 3.33 | 3.33 | 3.33 | mA/°C |
| Reverse Voltage                 | $V_R$            | 5                        | 5      | 5    | 5        | 5    | 5    | 5    | 5    | V     |
| Operating Temperature           | $T_{opr}$        | -40~+100                 |        |      |          |      |      |      |      | °C    |
| Storage Temperature             | $T_{stg}$        | -40~+110                 |        |      | -40~+120 |      |      |      |      | °C    |

※1  $I_{FRM}$  Measurement condition : Pulse Width  $\leq$  1ms., Duty  $\leq$  1/20.

※2 Temperature Condition: Ta=60°C or higher.

## Thermal Characteristics

| Item  | Symbol        | Ratings |     |      |      |     |     |     |     | Unit |
|---|---------------|---------|-----|------|------|-----|-----|-----|-----|------|
|   |               | VUB     | VUG | VYBG | VYPY | VFY | VFA | VFV | VFR |      |
| Junction Temperature (MAX.)                           | $T_j$         | 110     | 110 | 120  | 120  | 120 | 120 | 120 | 120 | °C   |
| Thermal Resistance (TYP.)<br>(Junction/ ambient)      | $R_{(thj-a)}$ | 600     | 600 | 700  | 650  | 650 | 650 | 650 | 650 | °C/W |
| Thermal Resistance (TYP.)<br>(Junction/ Solder Point) | $R_{(thj-s)}$ | 400     | 400 | 500  | 450  | 450 | 450 | 450 | 450 | °C/W |

※ $R_{(thj-a)}$  Measurement Condition/ Substrate: FR4(t=1.6mm) Pattern Size: 16mm<sup>2</sup>.

## Electro-Optical Characteristics (VUB,VUG)

(Ta=25°C)

| Item                     | Conditions           | Symbol         | Characteristic Ratings |     | Unit |      |
|--------------------------|----------------------|----------------|------------------------|-----|------|------|
|                          |                      |                | VUB                    | VUG |      |      |
| Forward Voltage          | I <sub>F</sub> =10mA | V <sub>F</sub> | TYP.                   | 3.3 | 3.3  | V    |
|                          |                      |                | MAX.                   | 3.8 | 3.8  |      |
| Reverse Current          | V <sub>R</sub> =5V   | I <sub>R</sub> | MAX.                   | 100 | 100  | μ A  |
| Peak Wavelength          | I <sub>F</sub> =10mA | λ <sub>p</sub> | TYP.                   | 465 | 522  | nm   |
| Dominant Wavelength      | I <sub>F</sub> =10mA | λ <sub>d</sub> | TYP.                   | 470 | 530  | nm   |
| Spectral Line Half Width | I <sub>F</sub> =10mA | Δλ             | TYP.                   | 26  | 35   | nm   |
| Half Intensity Angle     | I <sub>F</sub> =10mA | 2θ 1/2         | TYP.                   | 20  | 20   | deg. |

※Note: The dominant wave length (λ<sub>d</sub>) above is the setup value of the sorting machine.  
(Tolerance : λ<sub>d</sub>...±1nm)

## Electro-Optical Characteristics (VYBG, VYPY, VFY, VFA, VFV, VFR) (Ta=25°C)

| Item                     | Conditions           | Symbol         | Characteristic Rating |      |     |     |     |     | Unit |      |
|--------------------------|----------------------|----------------|-----------------------|------|-----|-----|-----|-----|------|------|
|                          |                      |                | VYBG                  | VYPY | VFY | VFA | VFV | VFR |      |      |
| Forward Voltage          | I <sub>F</sub> =20mA | V <sub>F</sub> | TYP.                  | 2.1  | 2.1 | 1.9 | 1.9 | 1.9 | 1.9  | V    |
|                          |                      |                | MAX.                  | 2.5  | 2.5 | 2.4 | 2.4 | 2.4 | 2.4  |      |
| Reverse Current          | V <sub>R</sub> =5V   | I <sub>R</sub> | MAX.                  | 100  | 100 | 100 | 100 | 100 | 100  | μ A  |
| Peak Wavelength          | I <sub>F</sub> =20mA | λ <sub>p</sub> | TYP.                  | 565  | 575 | 592 | 609 | 624 | 635  | nm   |
| Dominant Wavelength      | I <sub>F</sub> =20mA | λ <sub>d</sub> | TYP.                  | 562  | 572 | 590 | 605 | 615 | 626  | nm   |
| Spectral Line Half Width | I <sub>F</sub> =20mA | Δλ             | TYP.                  | 15   | 15  | 15  | 15  | 15  | 15   | nm   |
| Half Intensity Angle     | I <sub>F</sub> =20mA | 2θ 1/2         | TYP.                  | 40   | 40  | 40  | 40  | 40  | 40   | deg. |

※Note: The dominant wave length (λ<sub>d</sub>) above is the setup value of the sorting machine.  
(Tolerance : λ<sub>d</sub>...±1nm)

## Luminous Intensity Rank

(Ta=25°C)

### Standard Chart (Unit: mcd)

| Rank | I <sub>v</sub> (mcd) |       | VUB                  | VUG | VYBG                 | VYPY | VFY | VFA | VFV | VFR |
|------|----------------------|-------|----------------------|-----|----------------------|------|-----|-----|-----|-----|
|      | MIN.                 | MAX.  | I <sub>F</sub> =10mA |     | I <sub>F</sub> =20mA |      |     |     |     |     |
| B5   | 22                   | 27    |                      |     |                      |      |     |     |     |     |
| B6   | 27                   | 33    |                      |     |                      |      |     |     |     |     |
| B7   | 33                   | 39    |                      |     |                      |      |     |     |     |     |
| B8   | 39                   | 47    |                      |     | B8                   |      |     |     |     |     |
| B9   | 47                   | 56    |                      |     |                      |      |     |     |     |     |
| BX   | 56                   | 68    |                      |     |                      |      |     |     |     |     |
| BY   | 68                   | 82    |                      |     |                      |      |     |     |     |     |
| BZ   | 82                   | 100   |                      |     |                      |      |     |     |     |     |
| C1   | 100                  | 120   |                      |     |                      | C1   |     |     |     |     |
| C2   | 120                  | 150   | C2                   |     | C2                   |      |     |     |     |     |
| C3   | 150                  | 180   |                      |     |                      |      |     |     |     |     |
| C4   | 180                  | 220   |                      |     |                      |      |     |     |     |     |
| C5   | 220                  | 270   |                      |     |                      |      |     |     |     |     |
| C6   | 270                  | 330   |                      |     |                      |      |     |     |     |     |
| C7   | 330                  | 390   |                      |     |                      | C7   | C7  | C7  |     | C7  |
| C8   | 390                  | 470   | C8                   |     |                      |      |     |     |     |     |
| C9   | 470                  | 560   |                      |     |                      |      |     |     |     |     |
| CX   | 560                  | 680   |                      | CX  |                      |      |     |     | CX  |     |
| CY   | 680                  | 820   |                      |     |                      |      |     |     |     |     |
| CZ   | 820                  | 1,000 |                      |     |                      |      |     |     |     |     |
| D1   | 1,000                | 1,200 |                      |     |                      |      | D1  | D1  |     | D1  |
| D2   | 1,200                | 1,500 |                      |     |                      |      |     |     |     |     |
| D3   | 1,500                | 1,800 |                      |     |                      |      |     |     | D3  |     |
| D4   | 1,800                | 2,200 |                      | D4  |                      |      |     |     |     |     |
| D5   | 2,200                | 2,700 |                      |     |                      |      |     |     |     |     |
| D6   | 2,700                | 3,300 |                      |     |                      |      |     |     |     |     |
| D7   | 3,300                | 3,900 |                      |     |                      |      |     |     |     |     |
| D8   | 3,900                | 4,700 |                      |     |                      |      |     |     |     |     |
| D9   | 4,700                | 5,600 |                      |     |                      |      |     |     |     |     |


※ Limited width of luminous intensity rank is from Min.4 rank width.

## Color Tone Groups (λ d)

(Ta=25°C)

(unit: nm)

Tolerance: +/-1nm

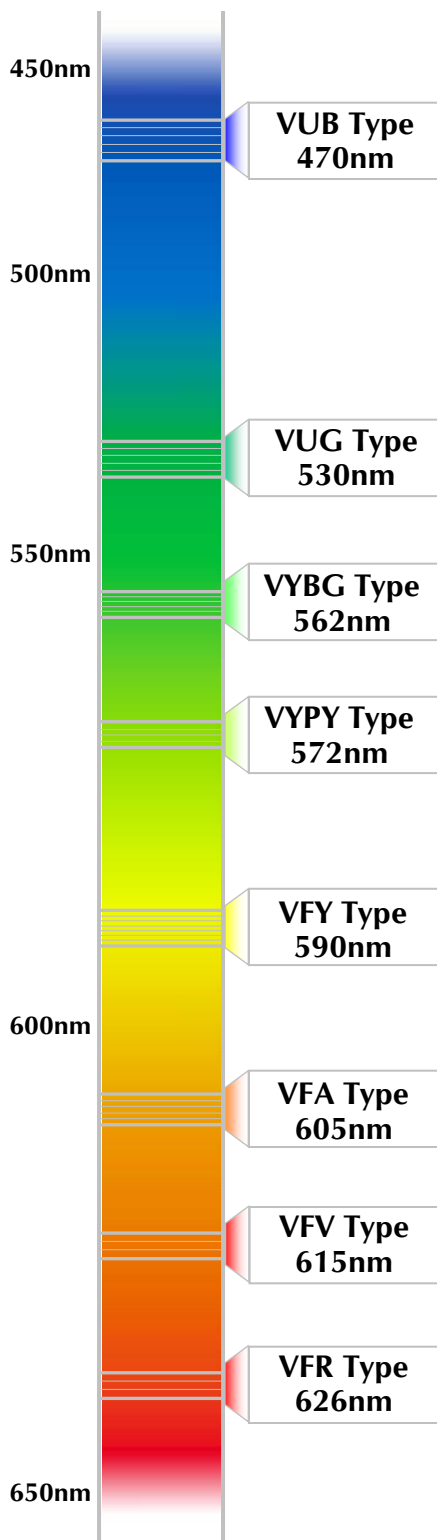

### VUB Type (I<sub>F</sub>=10mA)

|      | A     | B     | C     | D     |
|------|-------|-------|-------|-------|
| MIN. | 460.0 | 464.0 | 468.0 | 472.0 |
| MAX. | 464.0 | 468.0 | 472.0 | 476.0 |

### VUG Type (I<sub>F</sub>=10mA)

|      | A     | B     | C     | D     |
|------|-------|-------|-------|-------|
| MIN. | 515.0 | 520.0 | 525.0 | 530.0 |
| MAX. | 520.0 | 525.0 | 530.0 | 535.0 |

### VYBG Type (I<sub>F</sub>=20mA)

|      | B     | C     | D     |
|------|-------|-------|-------|
| MIN. | 555.0 | 558.0 | 561.0 |
| MAX. | 558.0 | 561.0 | 564.0 |

### VYPY Type (I<sub>F</sub>=20mA)

|      | A     | B     | C     |
|------|-------|-------|-------|
| MIN. | 567.0 | 570.0 | 573.0 |
| MAX. | 570.0 | 573.0 | 576.0 |

### VFY Type (I<sub>F</sub>=20mA)

|      | C     | D     | E     | F     |
|------|-------|-------|-------|-------|
| MIN. | 583.0 | 586.0 | 589.0 | 592.0 |
| MAX. | 586.0 | 589.0 | 592.0 | 595.0 |

### VFA Type (I<sub>F</sub>=20mA)

|      | A     | B     | C     | D     |
|------|-------|-------|-------|-------|
| MIN. | 597.0 | 600.0 | 603.0 | 606.0 |
| MAX. | 600.0 | 603.0 | 606.0 | 609.0 |

### VFV Type (I<sub>F</sub>=20mA)





|      | B     | C     | D     |
|------|-------|-------|-------|
| MIN. | 613.0 | 616.0 | 619.0 |
| MAX. | 616.0 | 619.0 | 622.0 |

### VFR Type (I<sub>F</sub>=20mA)





|      | A     | B     | C     |
|------|-------|-------|-------|
| MIN. | 620.0 | 626.0 | 632.0 |
| MAX. | 626.0 | 632.0 | 638.0 |

※Limited width of color tone rank is from Min.3 to Min.4 rank width.  
(It changes with product.)

## Characteristics Chart (VUB,VUG)

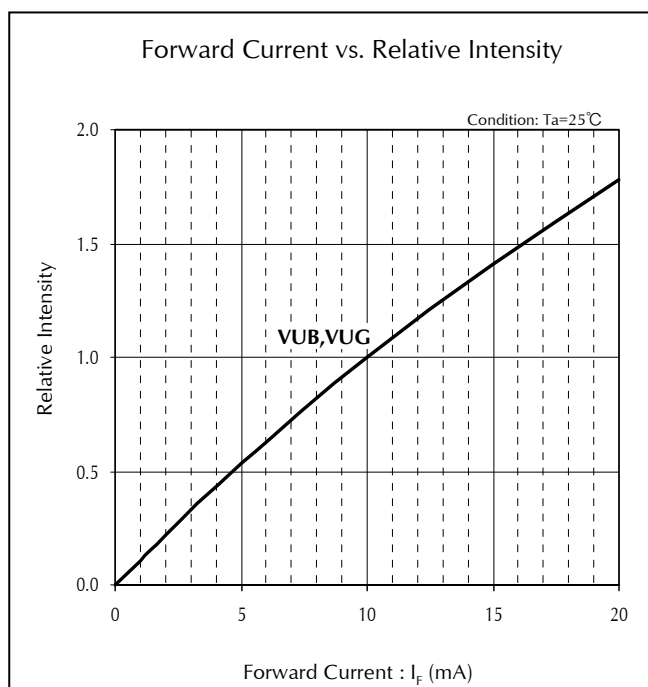
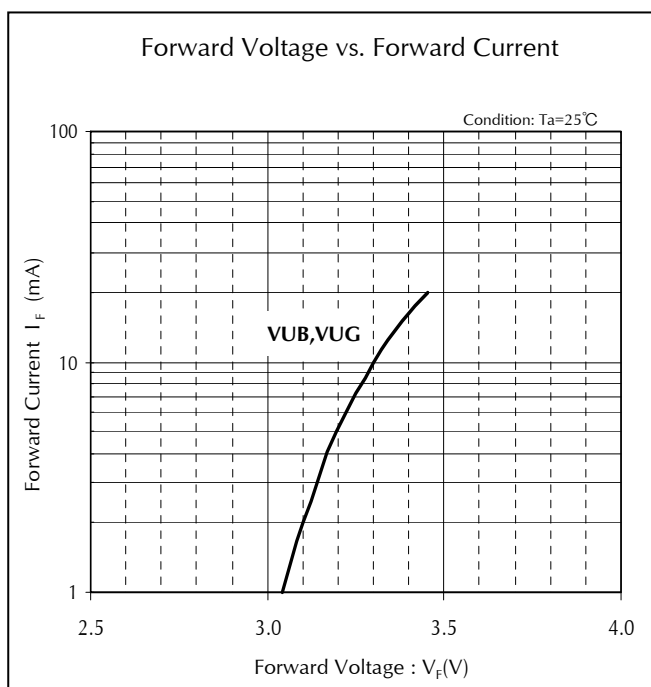
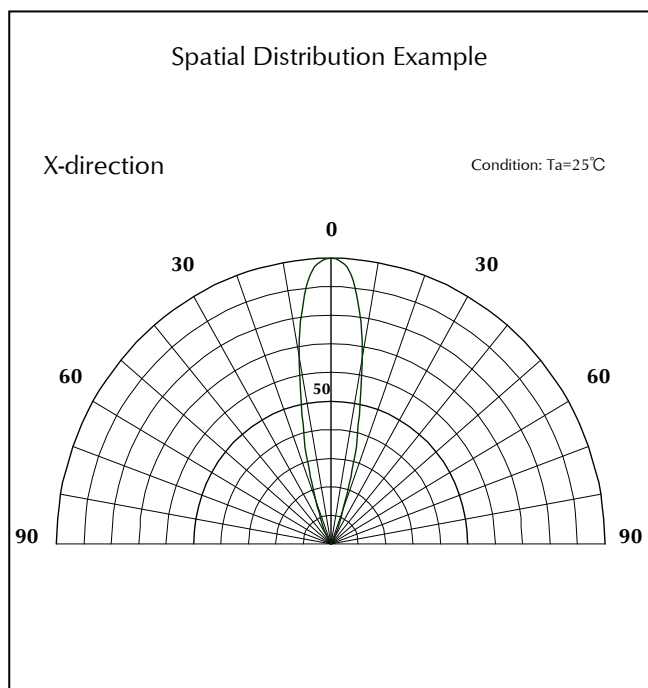
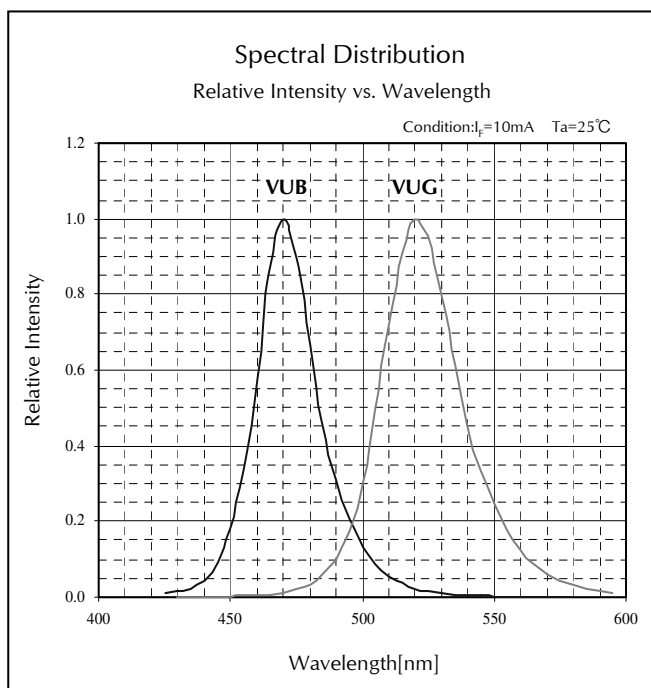


## Characteristics Chart (VUB,VUG)

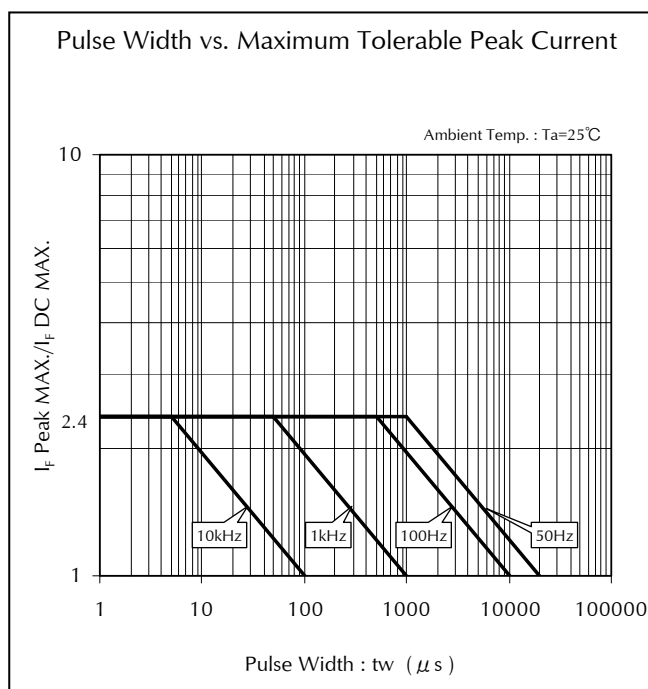
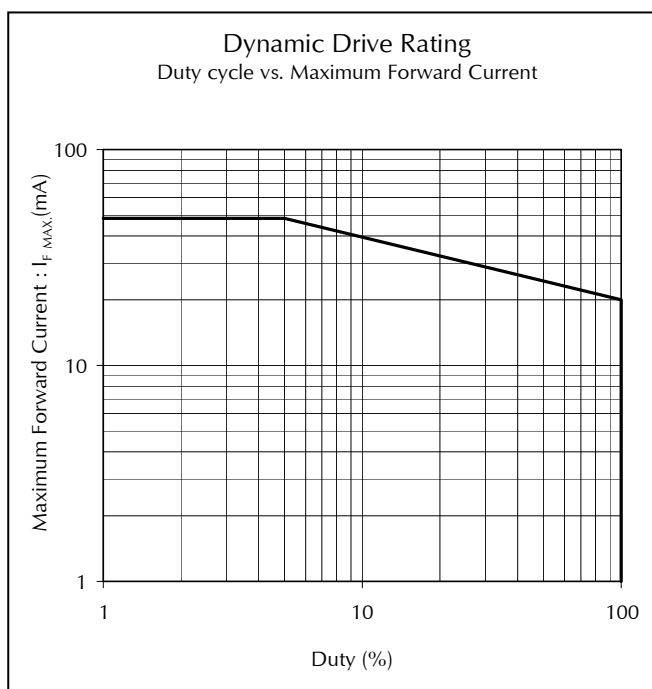
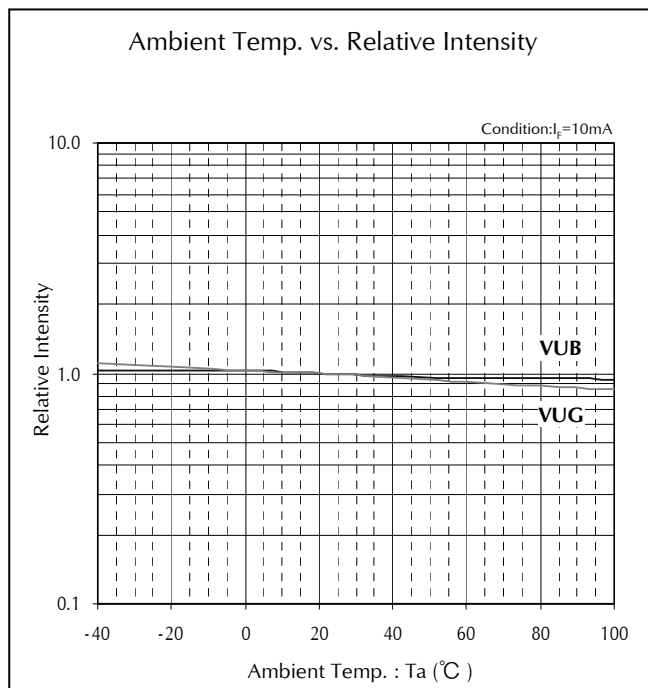
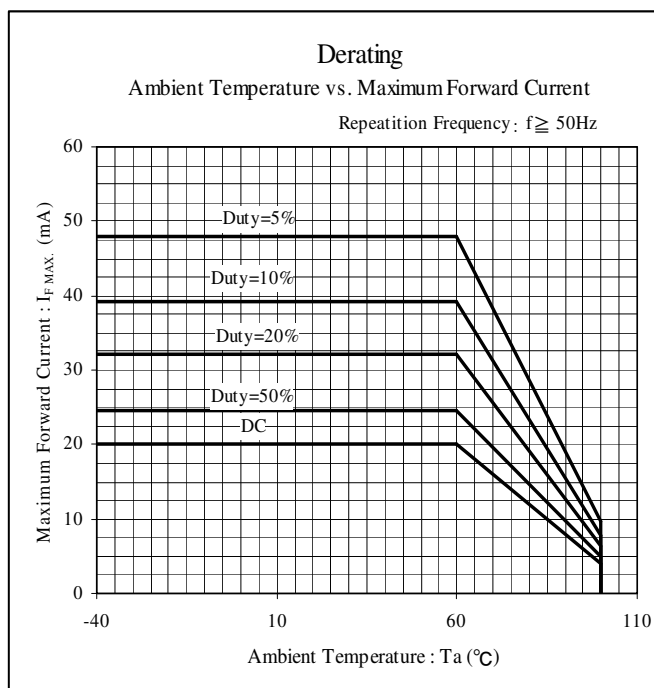








## Characteristics Chart(VYBG,VYPY)

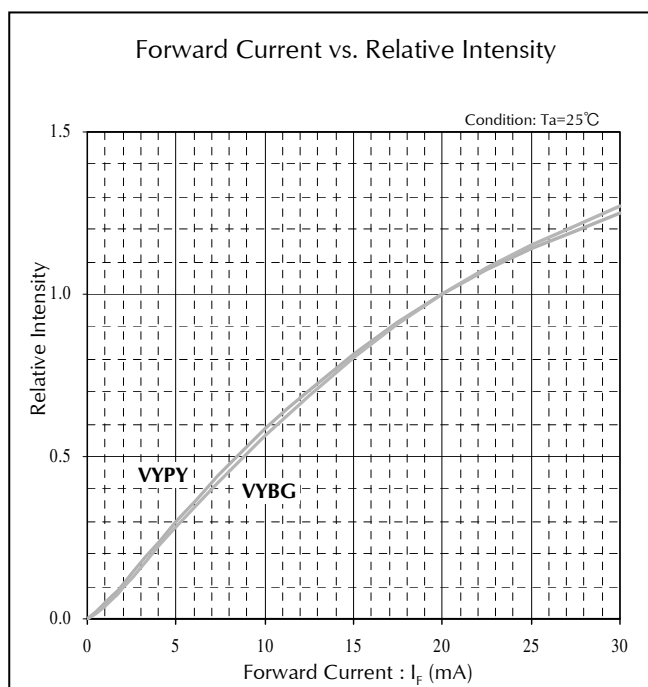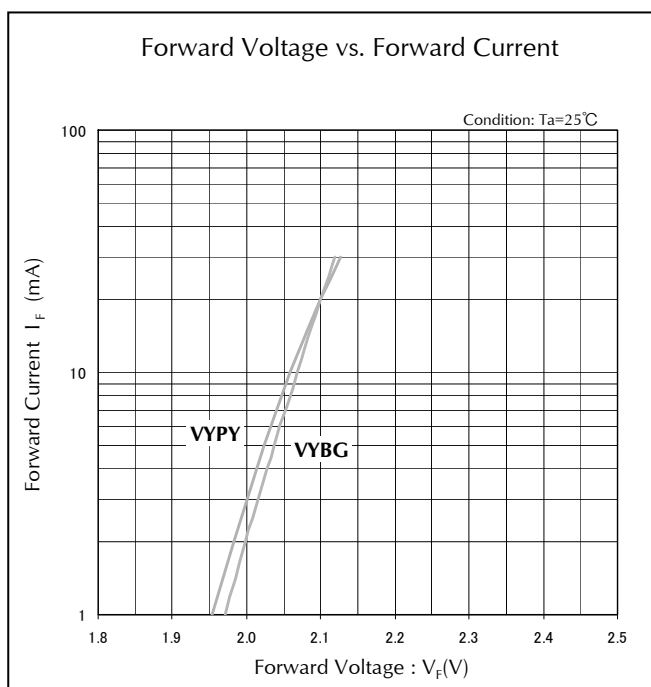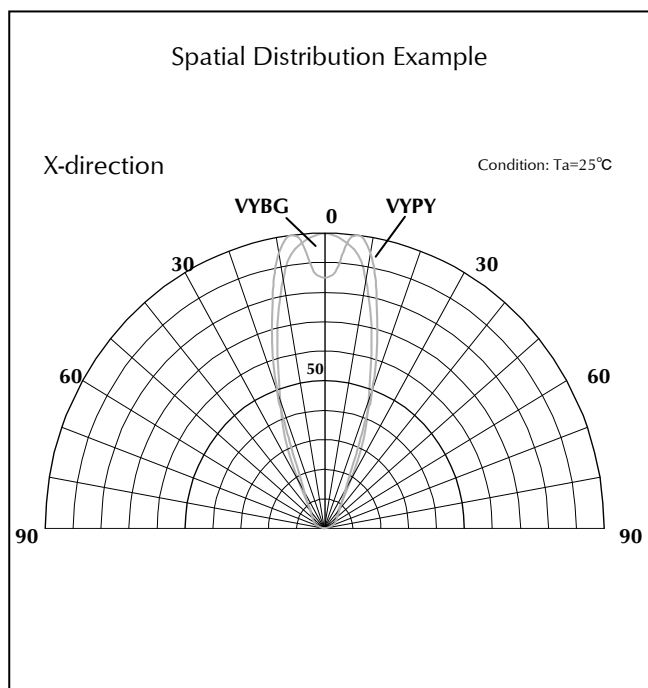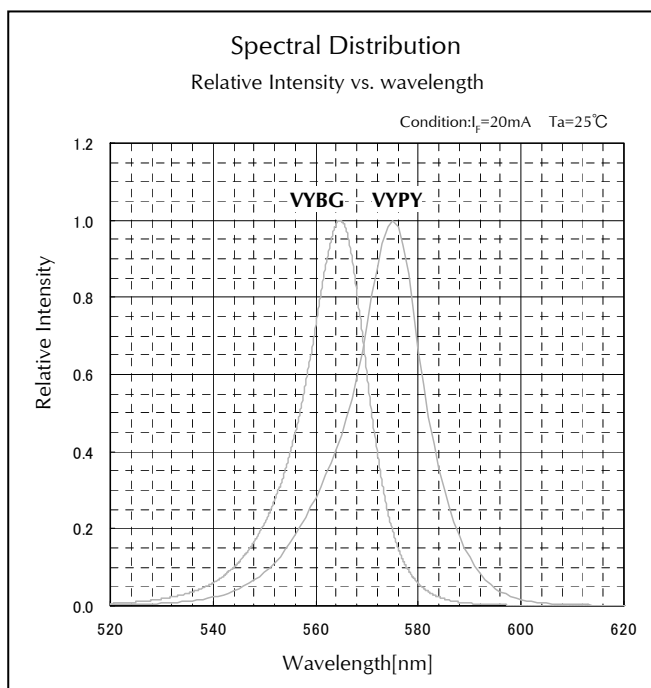





## Characteristics Chart (VYBG, VYPY)

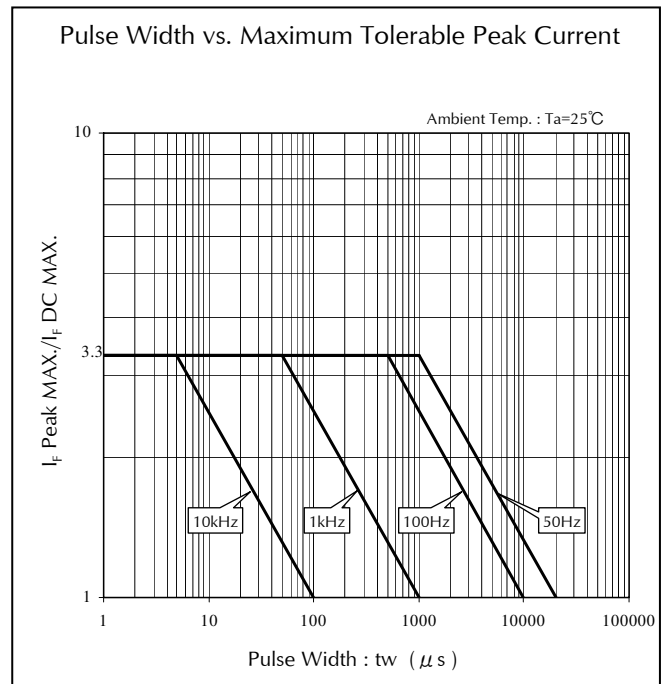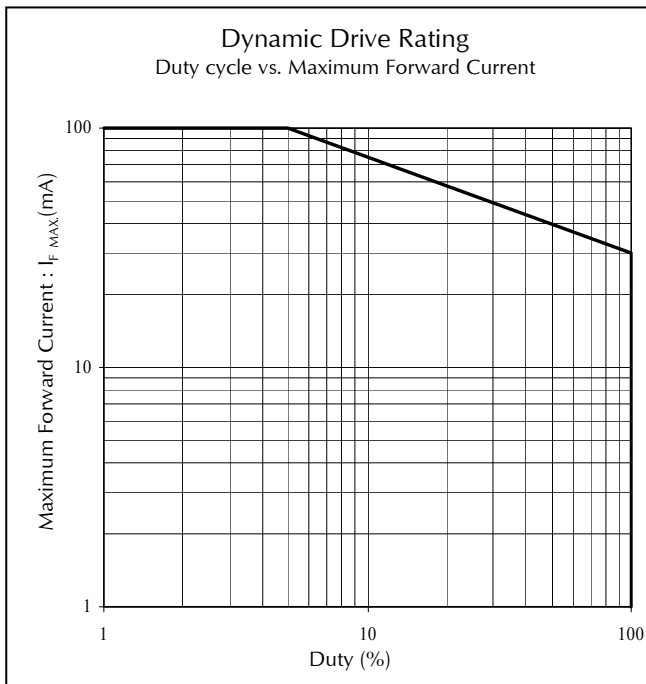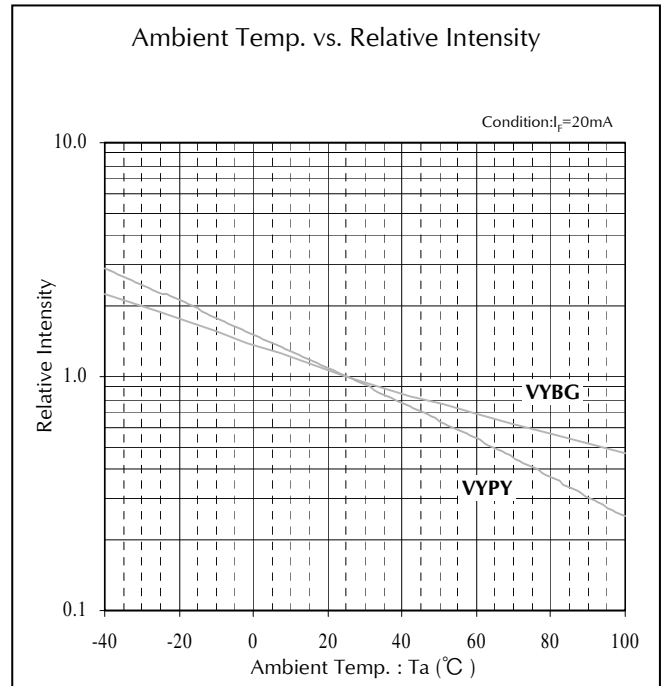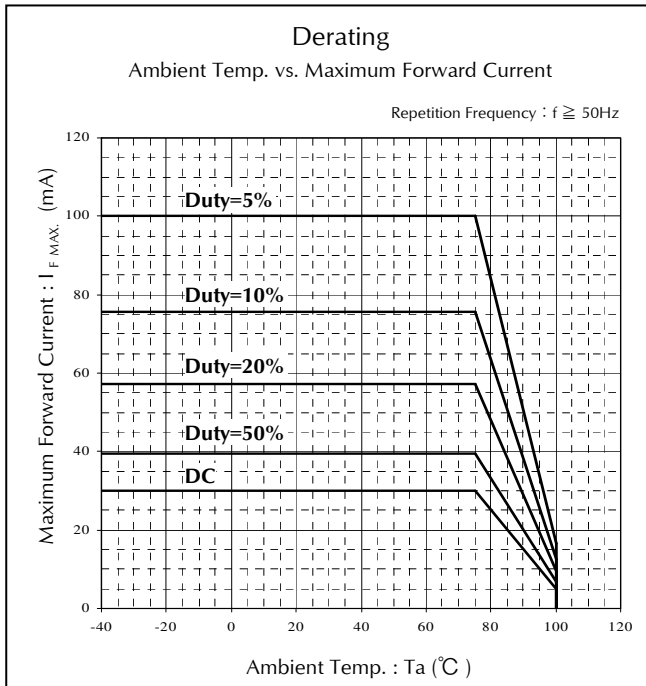

## Characteristics Chart (VFY,VFA,VFV,VFR)

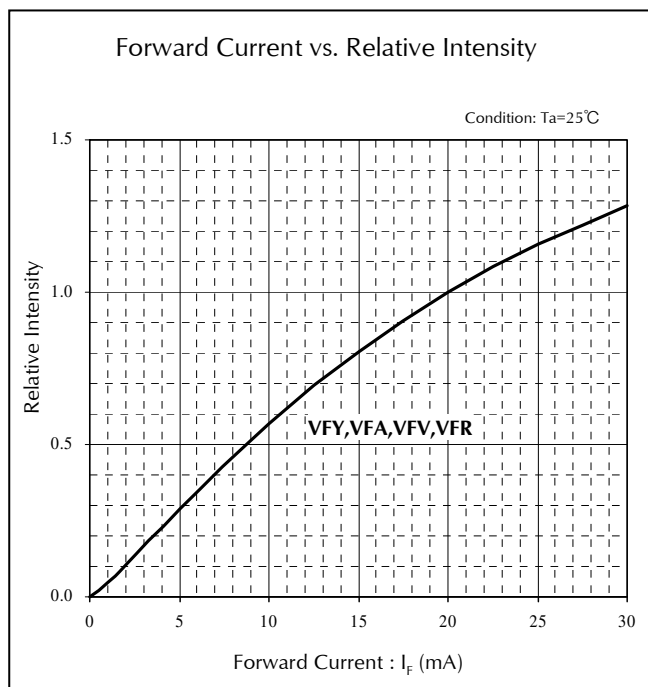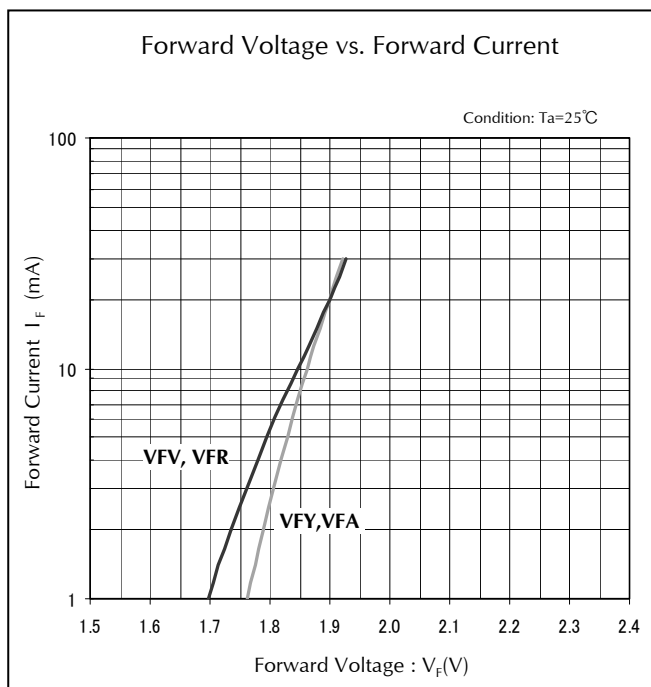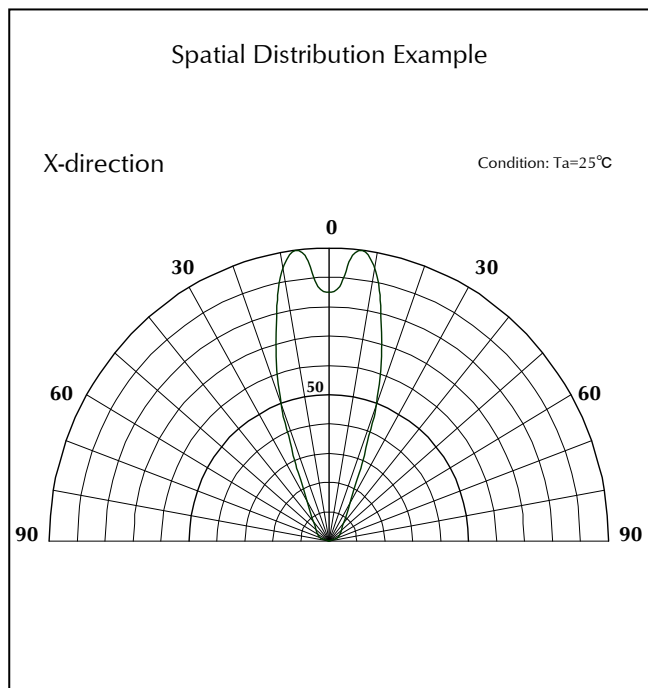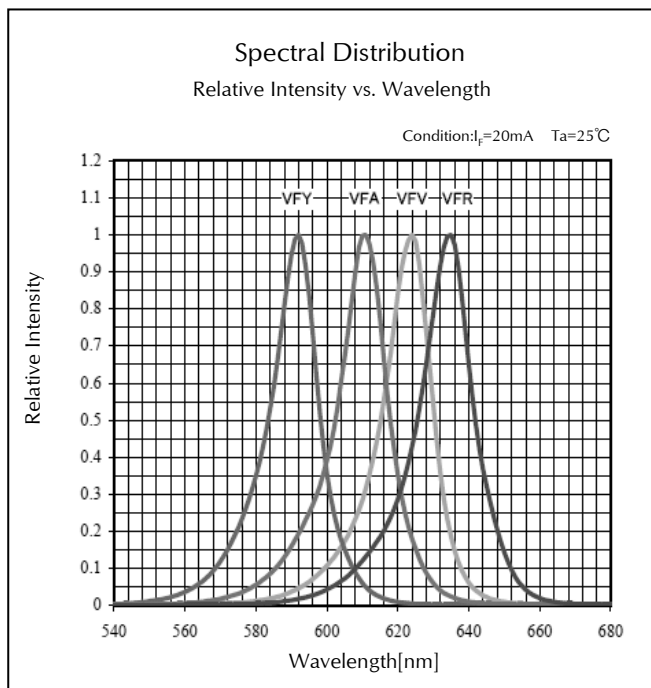


## Characteristics Chart (VFY, VFA, VFV, VFR)

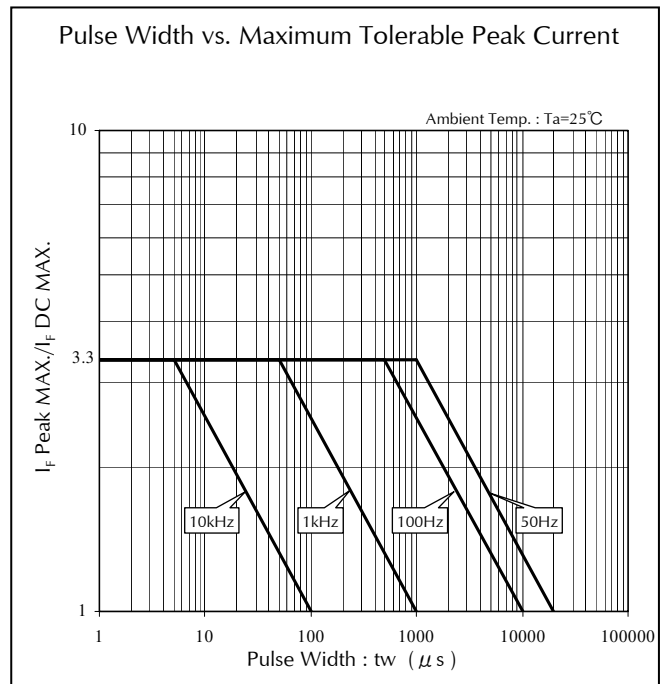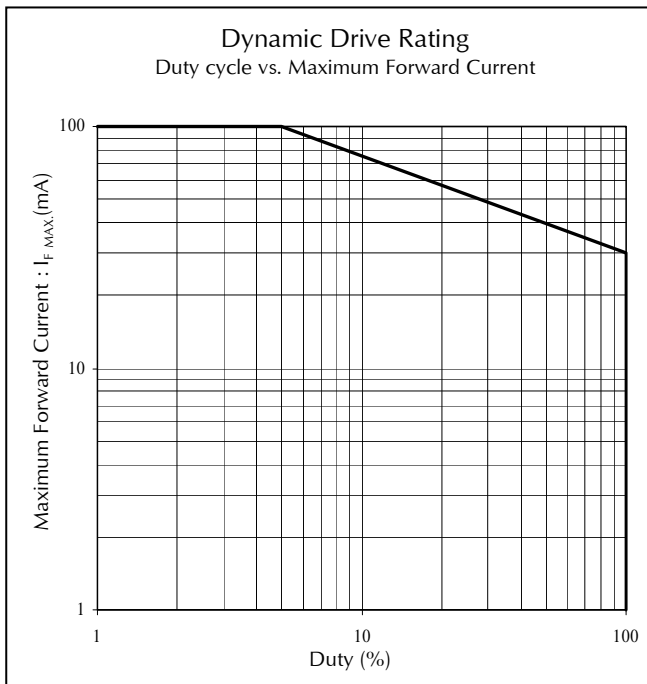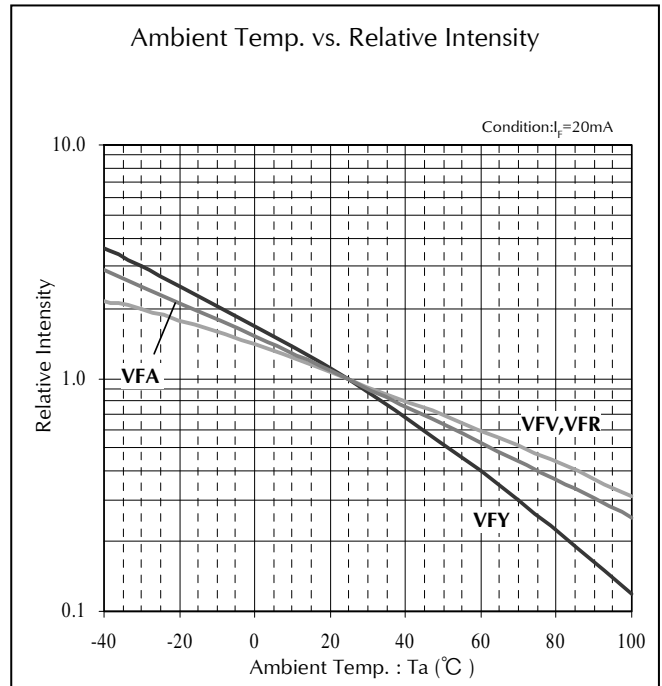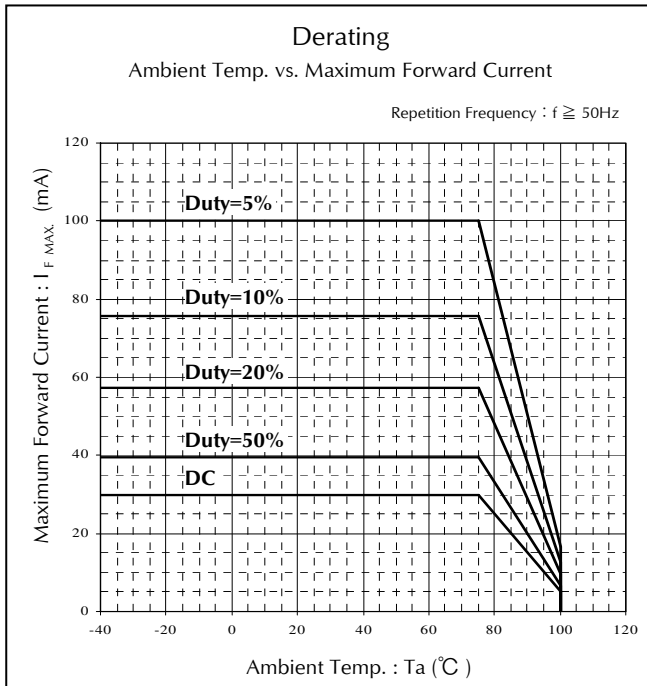

## Package Dimensions


(Unit: mm)

Weight: (7.81)mg

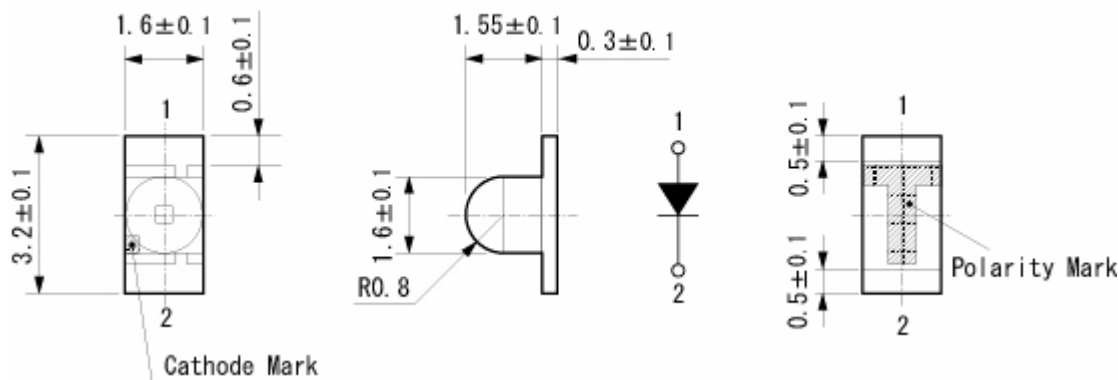

## Recommended Soldering Pattern

(Unit: mm)


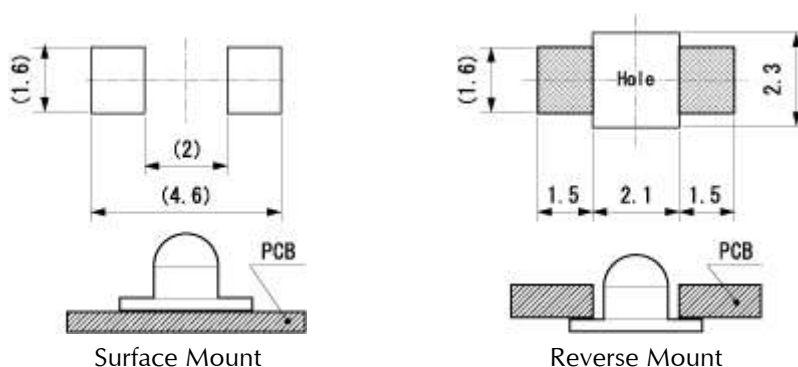


## Taping Specification


(Unit: mm)

Part No. : V□□1105W -TR (Surface Mount)  
Quantity: 2,000pcs/ reel(standard)

Part No. : V□□1105W -RR (Reverse Mount)  
Quantity: 2,000pcs/ reel(standard)

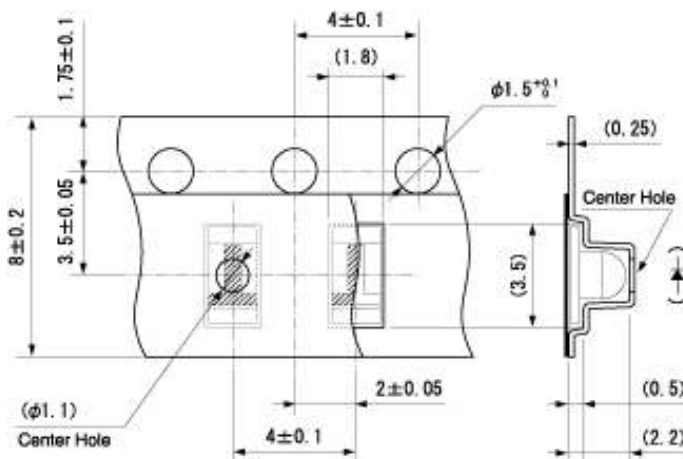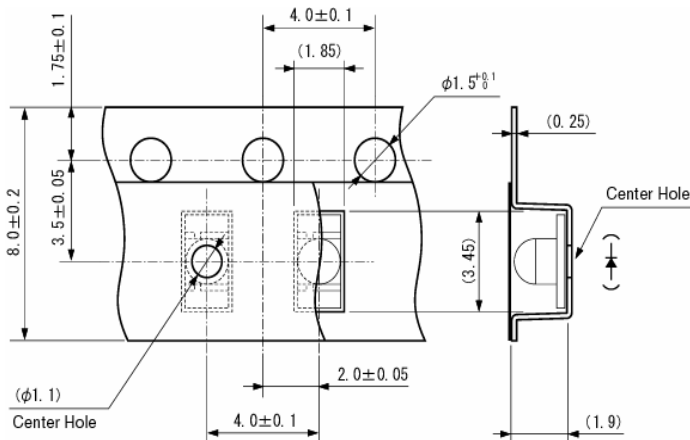

## Reflow Soldering Conditions

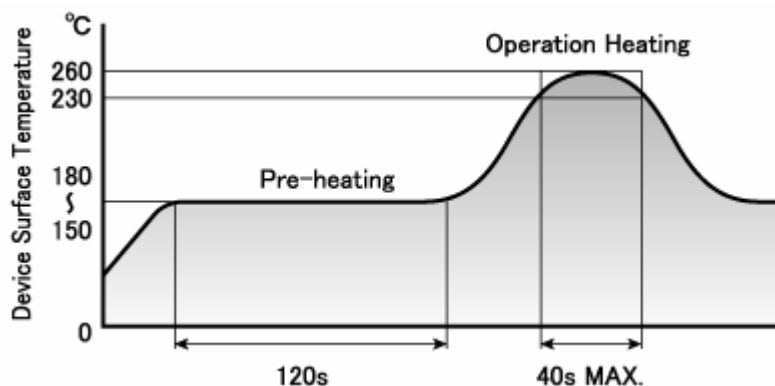

- 1) The above profile temperature gives the maximum temperature of the LED resin surface. Please set the temperature so as to avoid exceeding this range.
- 2) Total times of reflow soldering process shall be no more than 2 times. When the second reflow soldering process is performed, intervals between the first and second reflow should be short as possible (while allowing some time for the component to return to normal temperature after the first reflow) in order to prevent the LED from absorbing moisture.
- 3) Temperature fluctuation to the LED during the pre-heating process shall be minimized.

## Manual Soldering Conditions

|                              |        |        |
|------------------------------|--------|--------|
| Iron tip temp.               | 350 °C | (MAX.) |
| Soldering time and frequency | 3 s    | (MAX.) |
|                              | 1 time | (MAX.) |

## Reliability Testing Result

| Reliability Testing Result                    | Applicable Standard   | Testing Conditions  | Duration           | Failure |
|---|-----------------------|---|--------------------|---------|
| Room Temp. Operating Life                     | EIAJ ED-4701/100(101) | Ta = 25°C, If = Maximum Rated Current   | 1,000 h            | 0/20    |
| High Temp. Operating Life                     | EIAJ ED-4701/100(101) | Ta = Maximum Rated Operating Temperature, If = Derating Value                                     | 1,000 h            | 0/20    |
| Low Temp. Operating Life                      | EIAJ ED-4701/100(101) | Ta = -40°C, If = Maximum Rated Current  | 1,000 h            | 0/20    |
| Wet High Temp. Operating Life                 | EIAJ ED-4701/100(102) | Ta = 60°C, 90%, If = Maximum Rated Current  | 1,000 h            | 0/20    |
| Wet High Temp. Storage Life                   | EIAJ ED-4701/100(103) | Ta = 60°C, 90%  | 1,000 h            | 0/20    |
| Thermal Shock                                 | EIAJ ED-4701/100(105) | Ta = -40°C ~ Maximum Rated Storage Temperature (each 15min.)                                      | 1,000 cycles       | 0/20    |
| Thermal Shock Operating                       | EIAJ ED-4701/100(105) | Ta = -40°C(off) ~ 85°C (If = Derating Value on), (each 15min.)                                    | 1,000 cycles       | 0/20    |
| High Temp. Storage Life                       | EIAJ ED-4701/200(201) | Ta = Maximum Rated Storage Temperature  | 1,000 h            | 0/20    |
| Low Temp. Storage Life                        | EIAJ ED-4701/200(202) | Ta = Minimum Rated Storage Temperature  | 1,000 h            | 0/20    |
| Cycled Temp. Humidity Life                    | EIAJ ED-4701/200(203) | Ta = -30°C(2h) ~ 80°C, 95%(2h), 8h/cycle, If = Derating Value, 5min on-off                        | 30 cycles          | 0/20    |
| Resistance to Reflow Soldering                | EIAJ ED-4701/300(301) | Moisture Soak : 30°C, 70%, 72h<br>Preheat : 150 ~ 180°C(120s Max.)<br>Soldering Temp. : 260°C(5s) | Twice              | 0/20    |
| Electric Static Discharge (ESD) <sup>※1</sup> | EIAJ ED-4701/300(304) | C = 100pF, R2 = 1.5KΩ, ±2,000V  | once each polarity | 0/10    |
| Vibration, Variable Frequency                 | EIAJ ED-4701/400(403) | 98.1m/s <sup>2</sup> (10G), 100 ~ 2KHz, 20min, XYZ each direction                                 | 2 h                | 0/10    |

※1 Reference test

## Failure Criteria

| Items               | Symbols        | Conditions  | Failure criteria  |
|---------------------|----------------|---|---|
| Luminous Intensity  | Iv             | If Value of each product<br>Luminous Intensity      | Testing Min. Value < Spec. Min. Value x 0.5                     |
| Forward Voltage     | V <sub>F</sub> | If Value of each product<br>Forward Voltage         | Testing Max. Value ≥ Spec. Max. Value x 1.2                     |
| Reverse Current     | I <sub>R</sub> | V <sub>R</sub> = Maximum Rated<br>Reverse Voltage V | Testing Max. Value ≥ Spec. Max. Value x 2.5                     |
| Cosmetic Appearance | -              | -   | Occurrence of notable decoloration,<br>deformation and cracking |

## Special Notice to Customers Using the Products and Technical Information Shown in This Data Sheet

- 1) The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.
- 2) For the purpose of product improvement, the specifications, characteristics and technical data described in the data sheets are subject to change without prior notice. Therefore it is recommended that the most updated specifications be used in your design.
- 3) When using the products described in the data sheets, please adhere to the maximum ratings for operating voltage, heat dissipation characteristics, and other precautions for use. We are not responsible for any damage which may occur if these specifications are exceeded.
- 4) The products that have been described to this catalog are manufactured so that they will be used for the electrical instrument of the benchmark (OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument).  
The application of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. needs a high reliability and safety, and the breakdown and the wrong operation might influence the life or the human body. Please consult us beforehand if you plan to use our product for the usages of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. except OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument.
- 5) In order to export the products or technologies described in this data sheet which are under the "Foreign Exchange and Foreign Trade Control Law," it is necessary to first obtain an export permit from the Japanese government.
- 6) No part of this data sheet may be reprinted or reproduced without prior written permission from Stanley Electric Co., Ltd.
- 7) The most updated edition of this data sheet can be obtained from the address below:  
<http://www.stanley-components.com>