



**DETAIL Y**

MATERIAL:  
 • HOUSING-DSM STANYL TE250F6 (NYLON-46)  
 HEAT DEFLECTION TEMP.290°  
 BLACK COLOR, UL94V-0  
 • CONTACTS-0.35mm THICK PHOS-BRONZE  
 PLATED WITH HARD GOLD AND  
 GOLD FALSH IN SOLDER AREA.  
 • SHIELD-0.25mm THICK COPPER ALLOY,  
 PLATED WITH NICKEL.  
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
 PART 68,SUBPART F.

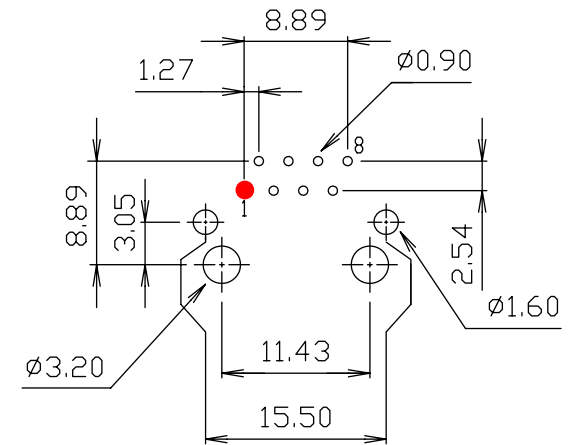

PCB LAYOUT  
 Ref.



● = Pin 1

**Ordering Information**

AJT65B	8	8	1	X
Type	Positions	Contacts	Ports	Plating 1 = 6u" 3 = 30u"

<b>Tolerance</b> unless otherwise specified mm .0 ± 0.25 .00 ± 0.13 .000 ± 0.05
--

<b>METZ CONNECT</b>	P/N: AJT65B881X
Desc.: Side entry, shielded, thru hole modular jack	
Date: 9-09-09 Dimensions in mm	Drawn By: Donna Mears Verified By: Mike Balekdjian