
J	MA	MATERIAL NO. ENGINEE		ERING ND,			FINISHED LENGTH		>.3M [1	FT]: +1	「H TOLER 9mm-0 [ + T]: +44.5m	.75in-0	)]	
	1300062505		2505	103107K13M010		3′3″ (1		(1M)	1.8 - 3.7	.9 - 1.8M [3 - 6FT]: +55.6mm-0 [+2 1.8 - 3.7M [6 - 12FT: +88.9mm-0 [-				
I	1300062506			103107K13M020		6'7" (		2M)	3.7 - 7.3M [12 - 24FT]: +165.1mm-0 [ 7.3-14.6M [24 - 48FT]: +317.5mm-0 [				- 1m-0 [+	
	13	30006	2507 2	103107	K13M	<13M030	9′1	)″ (	(3M)		14.6 - 30.5M [48-100FT]: +622.3m OVER 30M [100FT] +2% OF FINIS			
н	PART NUMBER LEGEND 103107K13M010									5-			— 1	
G	16/3 TPE						- FINISHED LENGTH M010 = 1 METER M020 = 2 METER				•			
F	- HI-FLEX MO20 = 2 METER MO30 = 3 METER NOTES: 1. MATERIAL: AS NOTED										4.00	1,28   		
E	2. FINISH: AS NOTED 3. ELECTRICAL: VOLTAGE: 500V PER IEC60664 600V PER UL2238 CURRENT: 13A													
D	4. TEMP RATING: -20°TO +90°C 5. PROTECTION: IP67 (WHEN MATED)													
С	6	1	WRAP LABEL		VINYL		BLACK/YI	ELLOW						
	5	1	DVERMOLD		PVC		GRAY							_/ 
B	4	1	COUPLING, A-SIZE, EXT. THD.		ZINC DIE-CAST		BLACK	BLACK			0/03		IALITY MBOL	GENE (UN
	3	3	CONTACT PIN		Cu ALLOY		GOLD PLATED				ELEASE 0215 17/1	017/1	<b>7</b> =0	4 PLACE 3 PLACE
	2	2 1 INSERT, MALE, TRI KEY 1 1 CABLE, 16/3		PVC TPE JACKET		BLACK YELLOW		-		INITIAL RELEASE NO: IPG2018-0215 MN: CCHRASTK 2017	CH'KD: RSTONE 21 APPR: BWOODMAN	·	2 PLACE 1 PLAC	
	ITEM QTY. DESCRIPTION		MATERIAL		FINISH		-			CH'KD: APPR: <sup>REV</sup>		D N WITH		
	13		12	12 1		1		0		8		[꾼] 7		

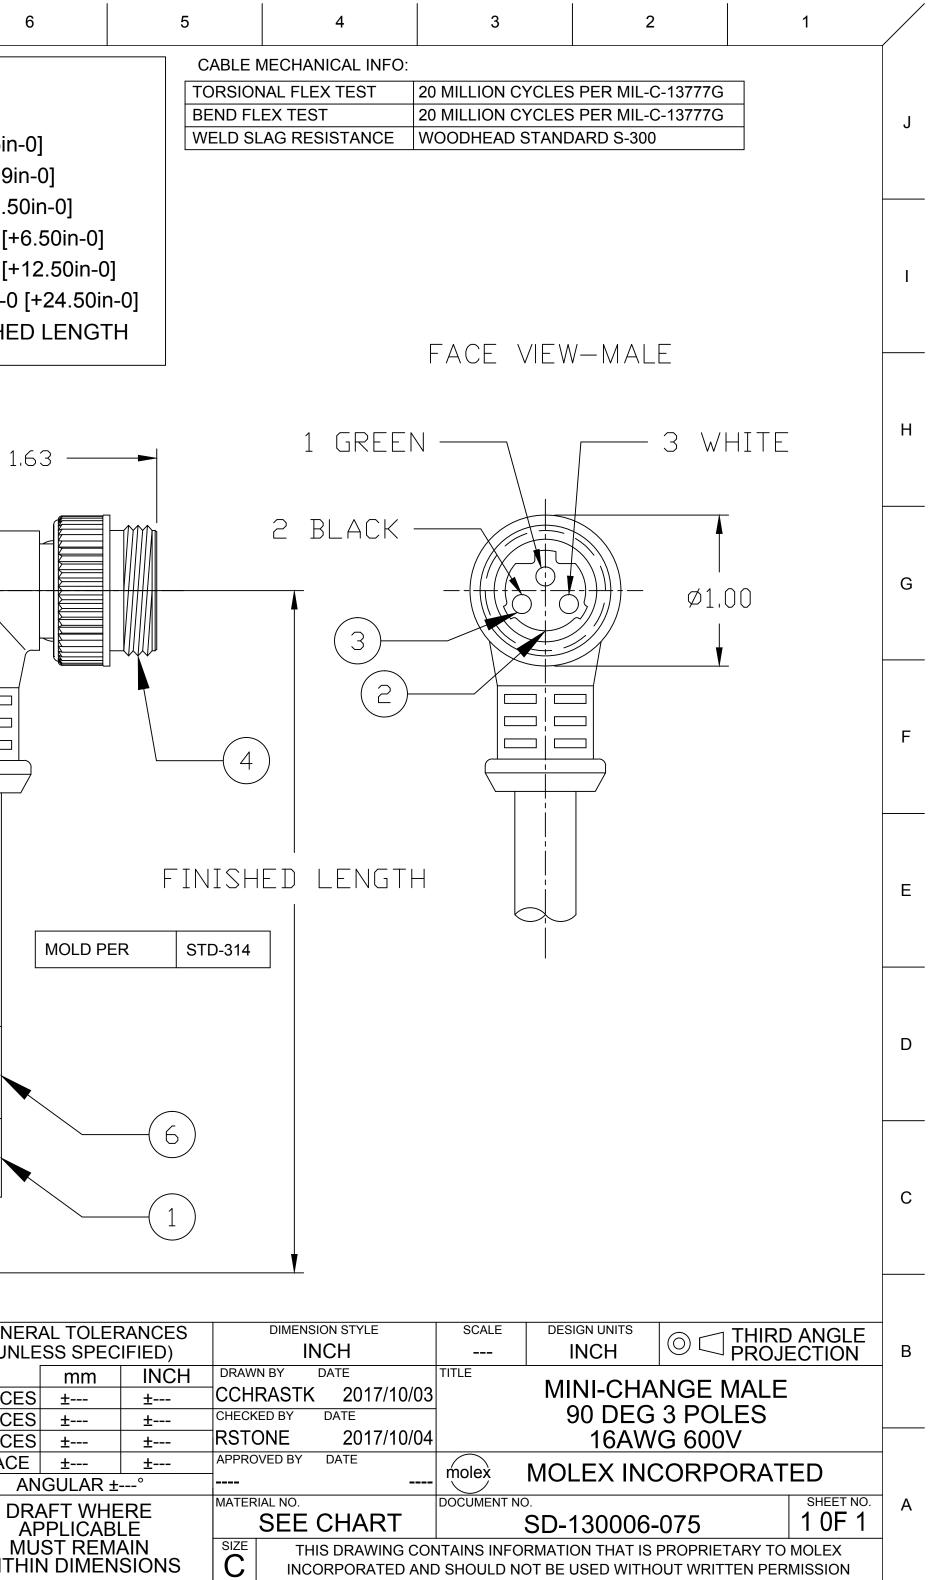

6	5	4	3	2	