



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-		A	EGC0-0085-05	15.03.05	witt	-
			A1	ECR-06-026658	12NOV2006	witt	-
			B	ECR-15-016070	04NOV15	KH	CW

Crimpstempel, komplett  
crimp punch, complete  
1191-47001

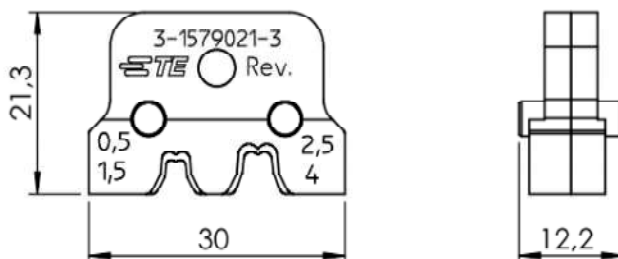

Crimpamboß, komplett  
crimp anvil, complete  
1191-47002

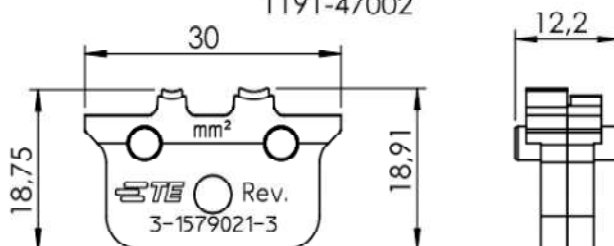


### Spare die set for hand tool PN 654174-1

Kontakte	DGB (mm <sup>2</sup> )	Drahtcrimp/Wire Crimp		Isolationscrimp/Insulation Crimp		Isolat.∅
Contacts	Wire Size	Hoehe/Height mm	Breite/Width mm	Hoehe/Height mm	Breite/Width mm	Ins. Range
160773	0,5 - 1,5	1.45 ± 0.07	2.3 ± 0.05	-----	3.3 ± 0.1	2.3-3.3
341001	2,5 - 4,0	2.25 ± 0.07	3.3 ± 0.05	-----	4.6 ± 0.1	3.6-4.3

### Die set with contact locator PN 6-1579015-5

THIS DRAWING IS UNPUBLISHED. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. COPYRIGHT 2003

DIMENSIONS: mm	DWN	Ch.Witt	15.03.05	MATERIAL	-	FINISH	-
	CHK	-	-	 <b>TE Connectivity</b>			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	-	-				
0 PLC ±	PRODUCT SPEC	-	-	NAME			
1 PLC ±	APPLICATION SPEC	-	-	DIE SET FOR POSITIVE-LOCK 0,5 - 4,0 mm <sup>2</sup> Matrize für Positive-Lock 0,5 - 4,0 mm <sup>2</sup>			
2 PLC ±	WEIGHT	-	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 PLC ±				A4	00779	3-1579021-3	-
4 PLC ±				CUSTOMER DRAWING			
ANGLES ±°				SCALE	SHEET 1 OF 1	REV	B