
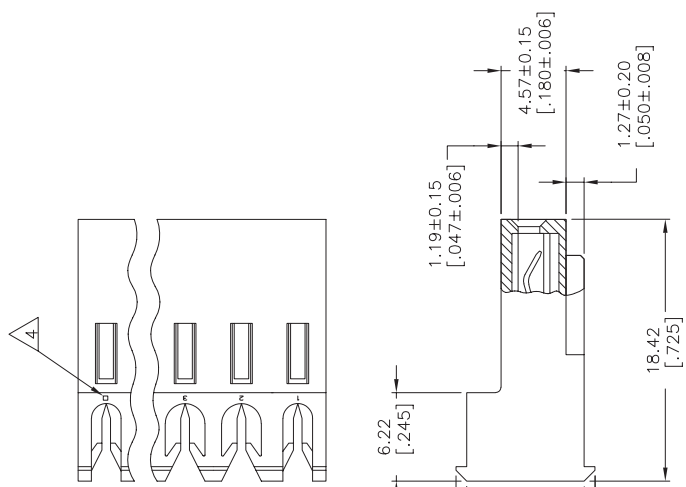



THIS DRAWING IS UNPUBLISHED.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.
 RELEASED FOR PUBLICATION

LOC	DIST	REVISONS
CM 00	P LTR S	DESCRIPTION
	ECO-07-012870	
DATE	DATE	DATE
15/JUN/07		
UIN	APD	
KW	DB	

QTY	UIN	DESCRIPTION	DATE	UIN	APD
24	5-641232-4				
23	5-641232-3				
22	5-641232-2				
21	5-641232-1				
20	5-641232-0				
19	4-641232-9				
18	4-641232-8				
17	4-641232-7				
16	4-641232-6				
15	4-641232-5				
14	4-641232-4				
13	4-641232-3				
12	4-641232-2				
11	4-641232-1				
10	4-641232-0				
9	3-641232-9				
8	3-641232-8				
7	3-641232-7				
6	3-641232-6				
5	3-641232-5				
4	3-641232-4				
3	3-641232-3				
2	3-641232-2				
24	2-641232-4				
23	2-641232-3				
22	2-641232-2				
21	2-641232-1				
20	2-641232-0				
19	1-641232-9				
18	1-641232-8				
17	1-641232-7				
16	1-641232-6				
15	1-641232-5				
14	1-641232-4				
13	1-641232-3				
12	1-641232-2				
11	1-641232-1				
10	1-641232-0				
9	641232-9				
8	641232-8				
7	641232-7				
6	641232-6				
5	641232-5				
4	641232-4				
3	641232-3				
2	641232-2				

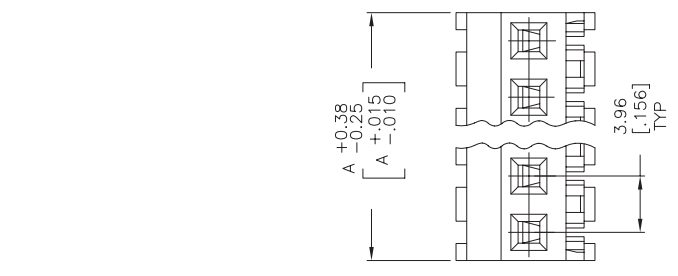

1. MATERIAL: CONNECTOR - NYLON UL94V-2 (ORANGE).
 CONTACTS - 0.00076 [.000030] GOLD IN CONTACT AREA WITH BRIGHT TIN-LEAD FOR -2 THRU -28, MATTIE WHISKER MITIGATED TIN FOR 3-641232-2 THRU 5-641232-4 OVER NICKEL UNDERPLATE.
2. CONTACTS ACCEPT 18 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
3. CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. HOUSING FEATURES ARE: FEED-THRU WITHOUT LOCKING RAMP.



THIS DRAWING IS A CONTROLLED DOCUMENT.	
UIN B. LEWIS	12 FEB 91
CHK G. SWING	12 FEB 91
APD D. CLARK	20 FEB 91
PRODUCT SPEC	NAME
108-1051	
APPLICATION SPEC	SIZE
114-1020	AZ 00779
WEIGHT	SCALE
	4:1
CUSTOMER DRAWING	SHEET 1 OF 1
	REV S