
5-2232264-6 - ACTIVE

Power Triple Lock TE Internal #: 5-2232264-6 Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

#### View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK: Glow Wire Cap

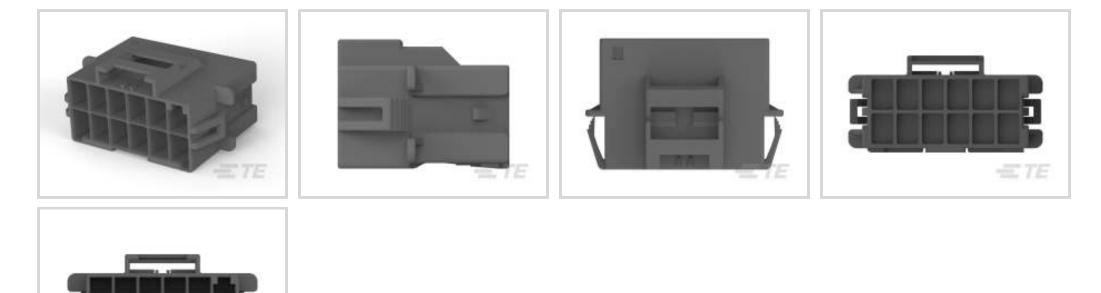

Rectangular Power Connector Type: Housing

-TE

Connector & Housing Type: Cap

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 6 mm [.236 in ]

### All POWER TRIPLE LOCK: Glow Wire Cap (44)

connectivity

## Features

## **Product Type Features**

Rectangular Power Connector Type	Housing			
Connector & Housing Type	Сар			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	12			
Number of Power Positions	12			
Number of Rows	2			
Electrical Characteristics				
Operating Voltage	600 VDC			
Body Features				

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°
Connector & Keying Code	A
Contact Features	
Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Tab
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	With
Panel Mount Feature Type	Latches
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	6 mm[.236 in]
Housing Color	Gray
Housing Material	Nylon GF

## Dimensions

Panel Thickness (Recommended)	1 – 2 mm[.039 – .079 in]
Connector Height	23.05 mm
Row-to-Row Spacing	8.1 mm[.319 in]
Usage Conditions	
Operating Temperature Range	-55 – 140 °C[-67 – 284 °F]
Operation/Application	
Circuit Application	Power
Identification Marking	
Circuit Identification Feature	With
Industry Standards	
UL Rating	Recognized
Agency/Standard	UL, VDE
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0

**C** For support call+1 800 522 6752

08/15/2023 11:06PM | Page 2

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Glow Wire Rating	GWT 750°C (Without Flame)		
Packaging Features			
Packaging Method	Carton		
Other			
Power Connectors Comment	Complies with IEC 61984 Specification		
Product Compliance For compliance documentation, visit the product page on TE.com>			
EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC		
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.		


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



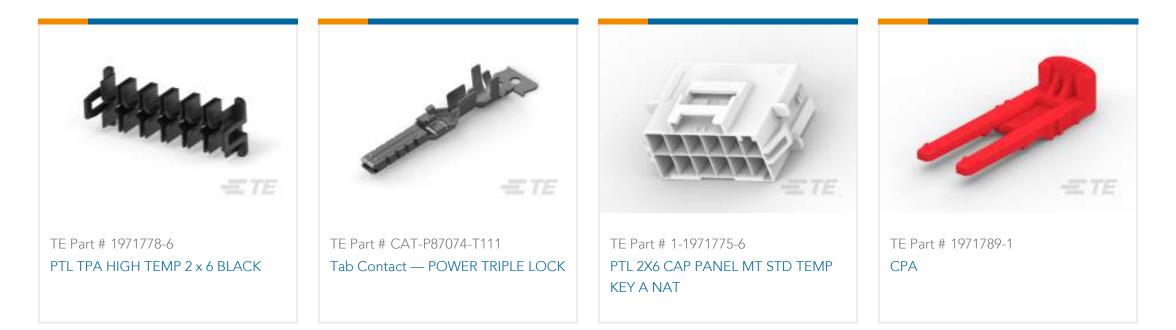




# Also in the Series | Power Triple Lock



Insertion & Extraction Tools(1)	TOWER CONTACTS(30)	IVE

# Customers Also Bought

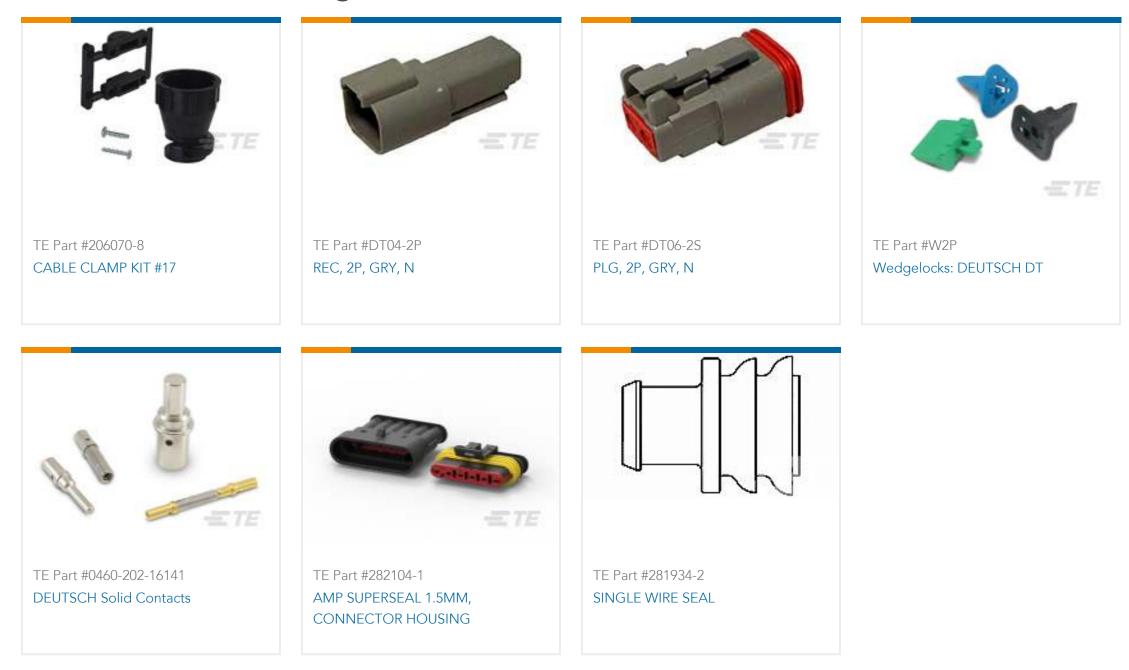

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



## Documents

Product Drawings PTL 2X6 CAP PANEL MT GLW WIRE KEY A DGR

English

## **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_5-2232264-6\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-2232264-6\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-2232264-6\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

Product Specifications Application Specification

English

Product Environmental Compliance MD\_5-2232264-6\_05062016132\_dmtec

English

MD\_5-2232264-6\_05062016132\_dmtec

English

Agency Approvals VDE Certificate

English

**VDE** Certificate

English