


REVISIONS		
REV	DESCRIPTION	DATE
H	REVISED PER DCR NO. R060215	03/30/2006

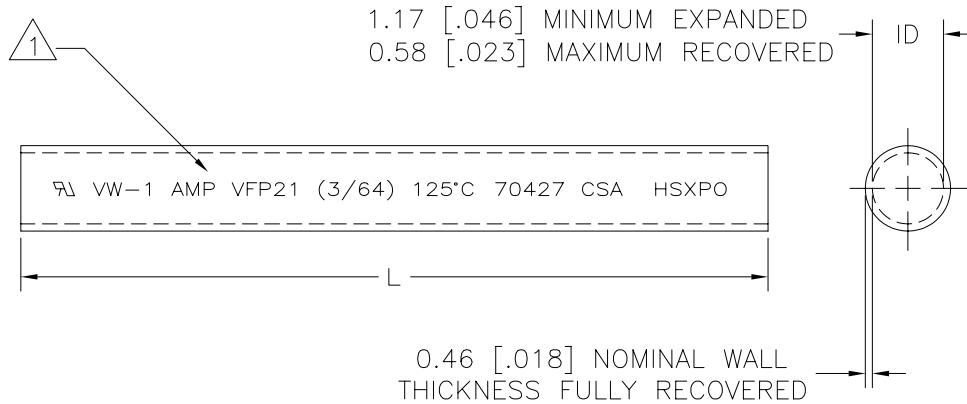

1. TUBING MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED (OPTIONAL). IF NOT PRINTED ON TUBING, PACKAGING OF TUBING MUST BE LABELED WITH APPROVED UL/CSA LABELS.

- TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.
- TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.
- WEIGHT PER LINEAR FOOT/304.8 mm: .41 g/.0009 lbs.
- MATERIAL: BLACK POLYOLEFIN

304.8 m [1000 ft] MINIMUM	603321-2
1.22 m [4 ft] MINIMUM	603321-1
LENGTH L	PART NUMBER

If this document is printed it becomes uncontrolled. Check for the latest revision

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS. DECIMALS .XX ± .01 [.0004 in] .X ± .1 [.004 in] ANGLES .X ± 0.5 DEG	DRAWN	UNGUYEN	03/30/2006	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA, USA 94025 		
	APPROVED	JBROOKS	03/30/2006			
	CAD NAME			R060215	TITLE	
				AMPSULATION VFP21 3/64 INCH ID, BLACK		
THIRD ANGLE PROJECTION				SIZE	CODE IDENT. NO.	DWG. NO.
				B	06090	603321
DO NOT SCALE THIS DRAWING						SHEET 1 OF 1