



STRIP MATERIAL NUMBER	FINISH
84525-0053	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL
84525-0057	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL

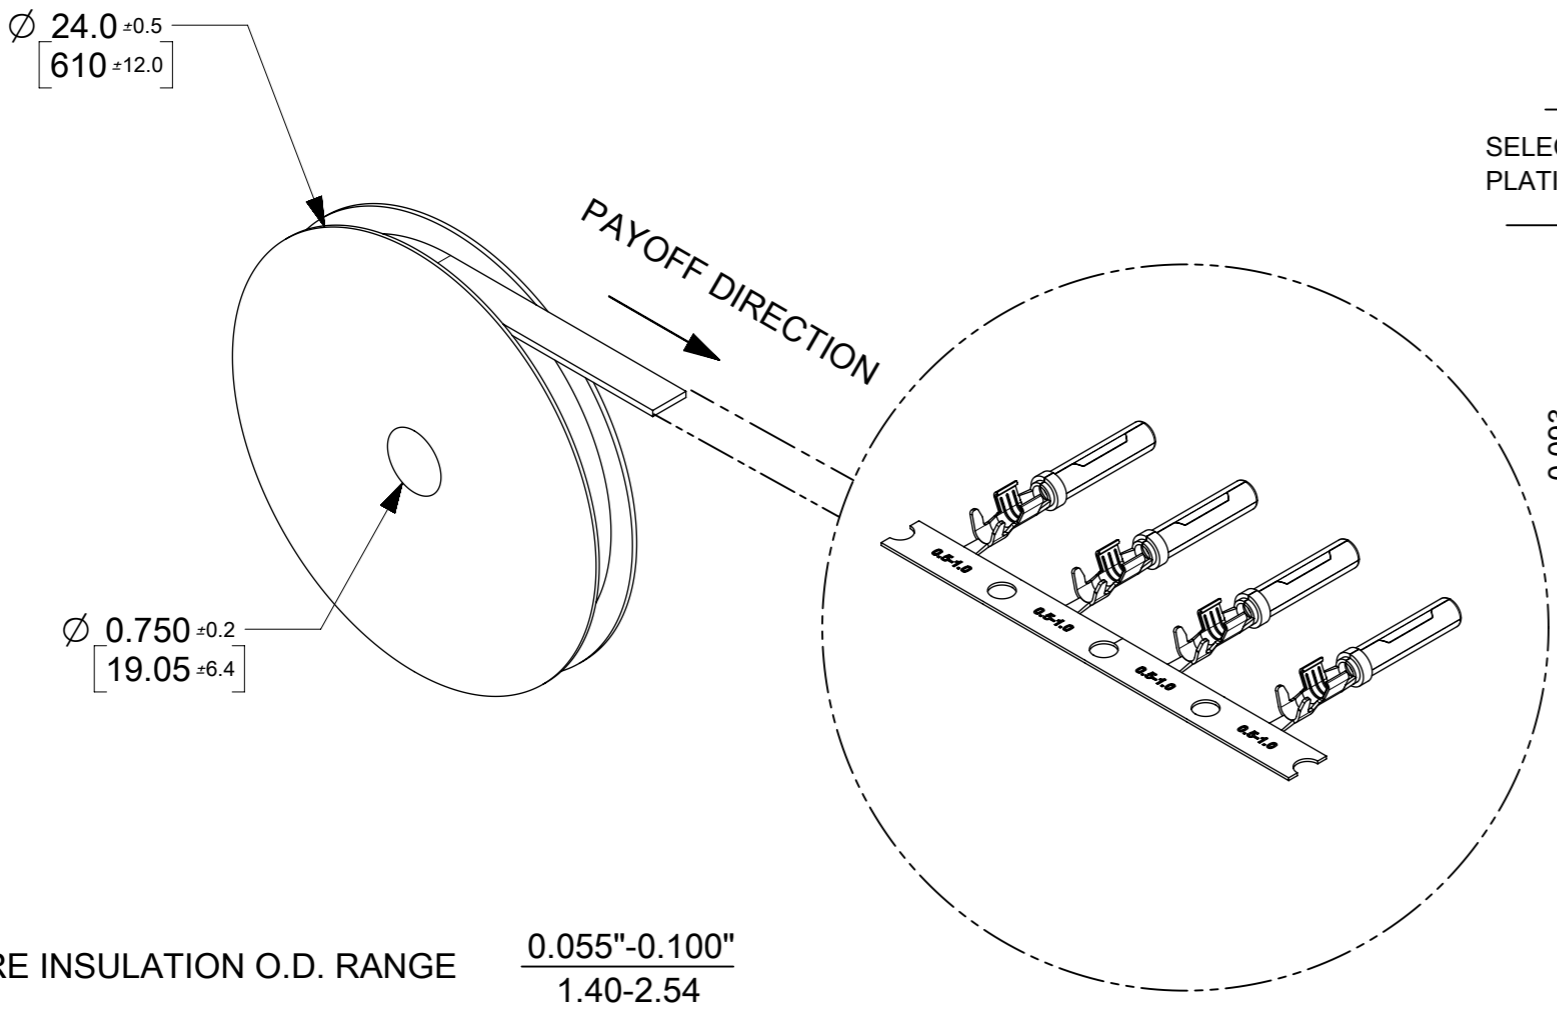

WIRE INSULATION O.D. RANGE $\frac{0.055"-0.100"}{1.40-2.54}$

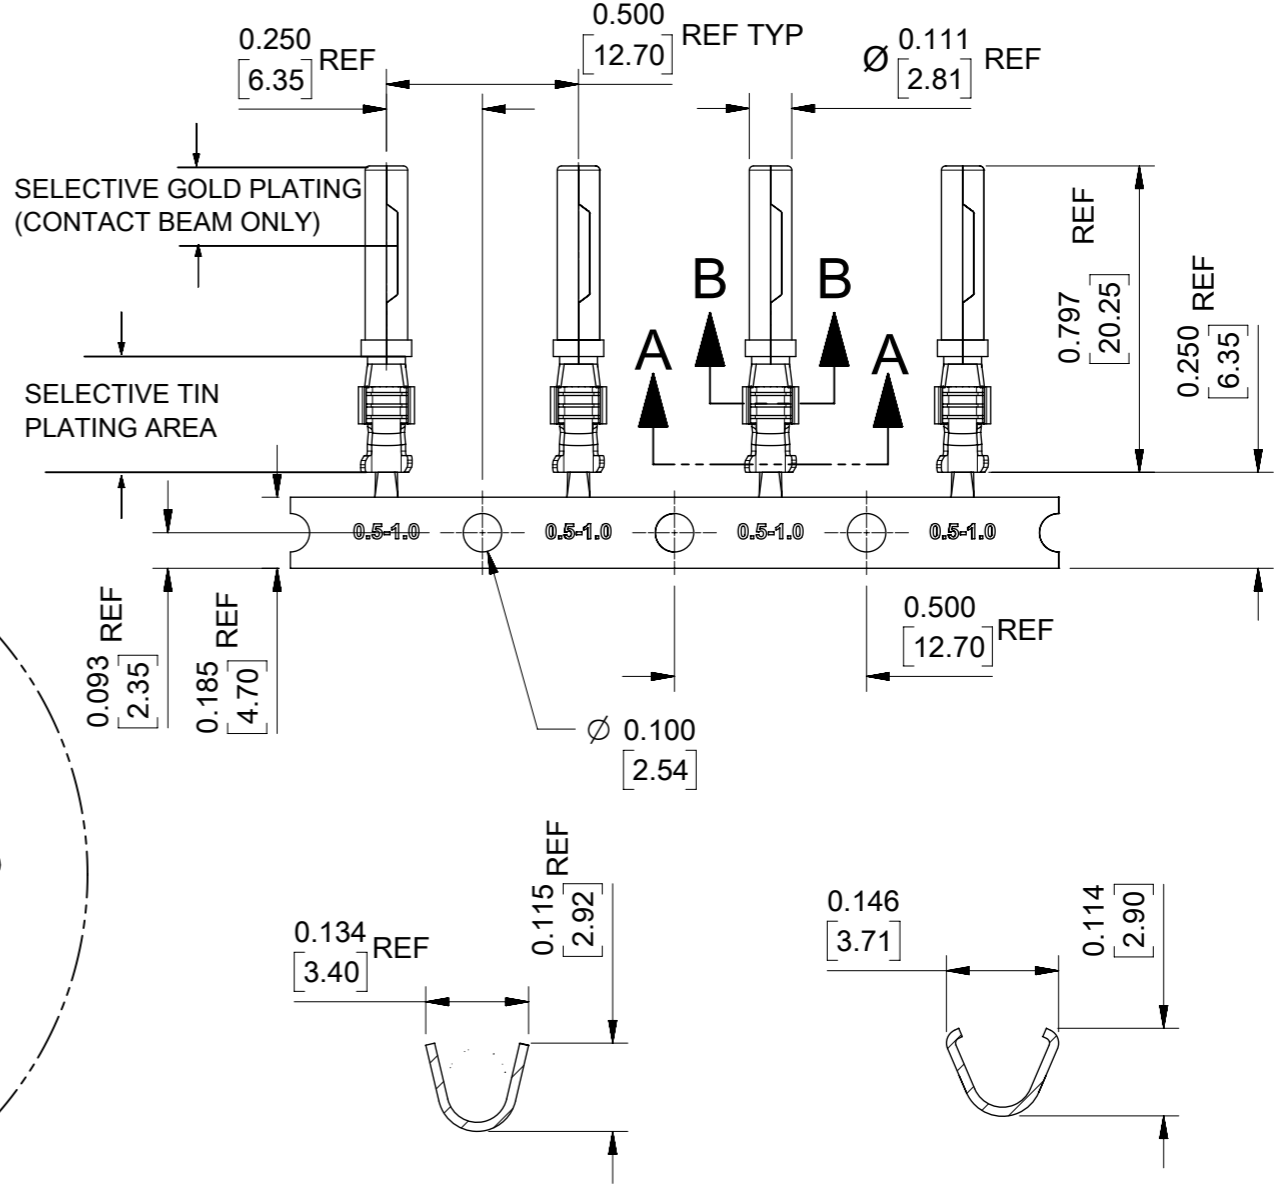

SECTION A-A
INSULATION CRIMP

SECTION B-B
CONDUCTOR CRIMP

- NOTES:
1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK.
FINISH: SEE CHART.
 2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE WITH SERIES XRC & ML-XT CONNECTOR ASSEMBLIES.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: SEE LONG TEXT			molex			
	DIMENSION UNITS	SCALE	EC NO: 168799						
▽ = 0	INCH/[mm]	2:1	DRWN: JFLETCHER	2017/11/21	XRC SOCKET TERMINAL W/SNAP WINDOW 16-20AWG (0.5-1.0MM ²) 0.055"-0.100" WIRE Ø				
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: JDWALLACE	2018/02/12					
▽ = 0	ANGULAR TOL ± 2.0°		APPR: JDWALLACE	2018/02/20	PRODUCT CUSTOMER DRAWING				
▽ = 0	4 PLACES ±		INITIAL REVISION:			DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
▽ = 0	3 PLACES ±		DRWN: JFLETCHER	2016/01/20	845250050	PSD	000	B	
▽ = 0	2 PLACES ± 0.13		APPR: JALEXANDER	2016/01/29	MATERIAL NUMBER			CUSTOMER	SHEET NUMBER
▽ = 0	1 PLACE ± 0.2		THIRD ANGLE PROJECTION			SEE CHART	GENERAL MARKET		1 OF 1
▽ = 0	0 PLACES ±		DRAWING			A3-SIZE	84525		
■ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SERIES						
▽ = 0			DRAWING						