



Electrical specifications

Center Frequency: 53.108 MHz
3dB Bandwidth: 100 KHz Min
Insertion Loss: 4.5 dB Max
Attenuation: 53 MHz
53.2 MHz
Pass Band Ripple: 1 dB Max
Input Power: 1dB Max
Impedance: 50Ohms


Mechanical

Mounting Method: SMT
Dimensions: 1.25" x .75" x .55"

Environmental

Operating Temperature: -20 to +50 deg.C

Outline Drawing:

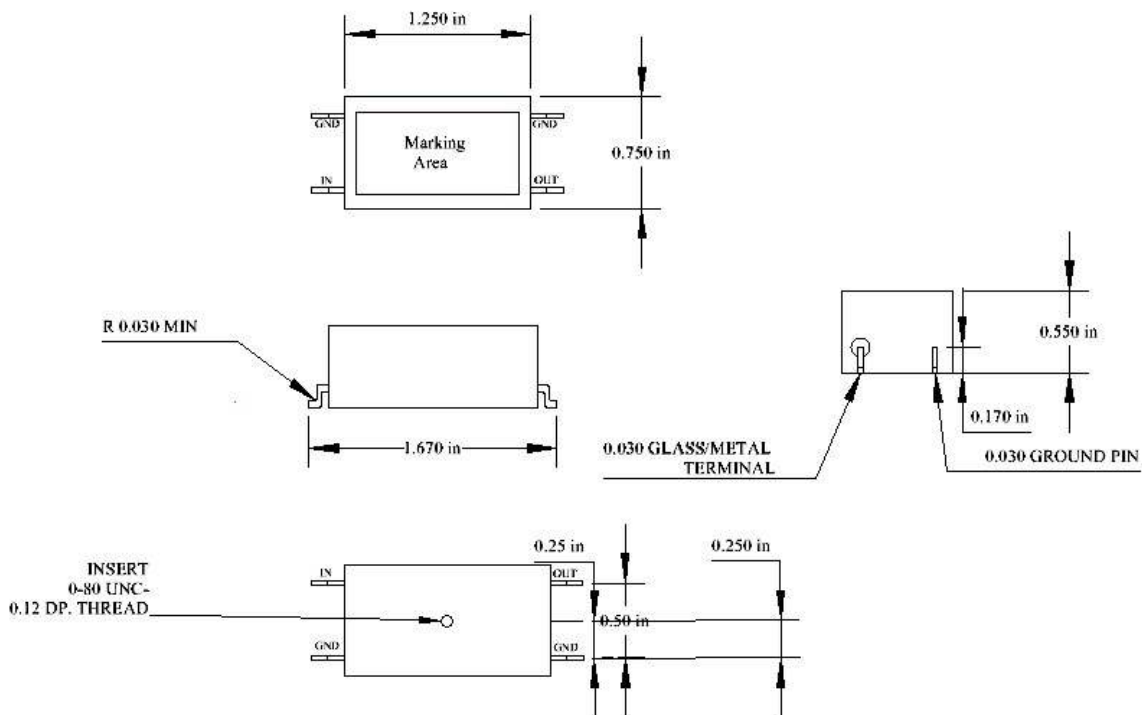



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

53.1048 MHz Band Pass Crystal

Part Number: Q61472B



Response Plot:

