
_		 		
	دی ا	 111	0	0





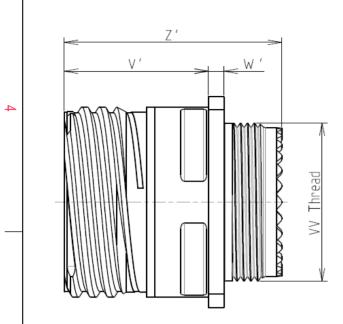

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
2	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: 13.4 g ± 10%			

8D 0

G

11

Μ

05

В

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 11-05

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

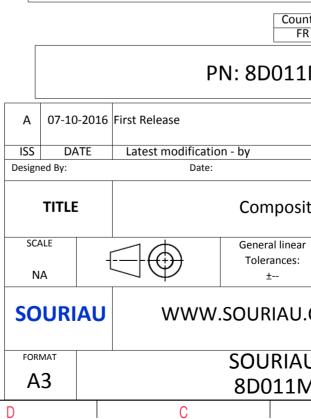

	Ξ		А		
A	C/	0			4
	1. 100				
	Base	1			
		5			
	1/ 1	3			
	and the second s				
AS EXA	AMPLE				3
	non-conformit ch does not co				
er of t	which does not comply with of the Parties or by a third party dation, technical notice.)				
		liction & Con	trollist		
untry FR	JULISU	Not Listed			2
1M	05BN				
					-
	1			MOD N°	
			R DRAWING		
site	Receptacl	e 8D seri	es		
ar :			/ PROJECT		
			359 cument is the prop	erty of	1
J.CC	M		SOURIAU st not be reproduc nicated without per		
	DRG N°	commu		SHEET	-
	5BN-C			1/2	
	В		А		

r	τ	۵	н П	m		0	
		Contact Layout				P	anel Cutou
4	-x	$ \begin{array}{c} & & & \\ & & & \\ $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Contr positi ID A B B C C D E Shell Arrangement Numl size no. cont	X-avis (mm) Y-avis (mm) +.065 (1.65) +.056 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.42)			* *	ØA	<u>ØT</u>
ى	11 -5 5					Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts whi by either of
N						PN: 80	Country FR
						2016 First Release	
					ISS DAT Designed By:	E Latest modification - by Date:	
					TITLE	Cor	mposite
_					SCALE NA	-{	eral linear erances: ±
					SOURI	WWW.SOUF	RIAU.C
				_	FORMAT A3		JRIAU 011M(
	Н	G	F	E	D	C	

