

TE Internal #: 151679 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 7.11 mm [.279 in] Centerline, Wire & Cable, UL 94V-2 View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 7.11 mm [.279 in]

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	2
Number of Power Positions	2
Number of Signal Positions	2
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VDC
Contact Features	
Contact Current Rating (Max)	15 A
Contact Retention Within Housing	With

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 7.11 mm [. 279 in] Centerline, Wire & Cable, UL 94V-2



Contact Type	Pin	
Contact Type	1 111	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	7.11 mm[.279 in]	
Housing Color	Natural	
Housing Material	Nylon	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Power	
Industry Standards		
UL Flammability Rating	UL 94V-2	
Glow Wire Rating	Standard Part - Not Glow Wire	

Packaging Features

Packaging Method

Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 7.11 mm [. 279 in] Centerline, Wire & Cable, UL 94V-2



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




ETE	= TE	ETE.	= TE
TE Part # 1-480720-0	TE Part # 1-480318-0	TE Part # 1-480283-0	TE Part # 151680
02P CMNL PLUG HSG W/LOK NATL	02P CMNL PLUG HSG F/H NATL	08P CMNL PLUG HSG M/M NATL	2 WAY MATE-N-LOK SOC HSG NAT.



Customers Also Bought

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 7.11 mm [. 279 in] Centerline, Wire & Cable, UL 94V-2



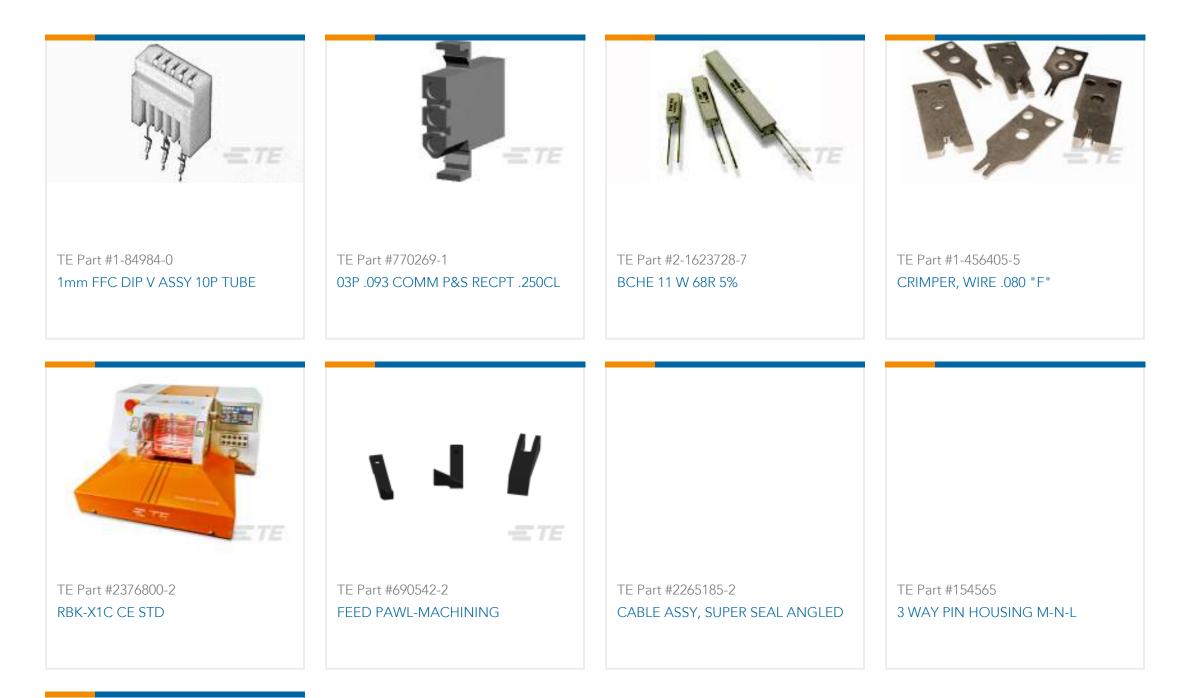



ANVIL

REPRESENTATION ONLY

TE Part #732459-1 INSERT ANVIL

Documents

Product Drawings 2 WAY M-N-L PIN HSG.NAT.

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_151679_U.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_151679_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_151679_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 7.11 mm [. 279 in] Centerline, Wire & Cable, UL 94V-2



SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications Application Specification

English