


A		B		C		D		E		F		G		H		
												記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

FEATURES:

- 1 Electrical Test:
  - A. Safety Voltage/Current Rating 150V ac, at 1.5A.
  - B. Dielectric with standing 1000V/DC/min, <0.5A.
  - C. Insulation Resistance: >500M Ω, 1000V./min
  - D. Contact Resistance: <20M Ω
- 2 Mechanical:
  - A. Cable-to-Plug tensile strength-20LBs(89N)min.
  - B. Durability: 750 mating cycles.
  - 3 Operation Temperature: -40°C ~ +85°C.
  - 4. Environmental compliance
    - A. the products are compliant with the RoHS, and REACH ETC.
  - 5. Safety standards: UL E239590

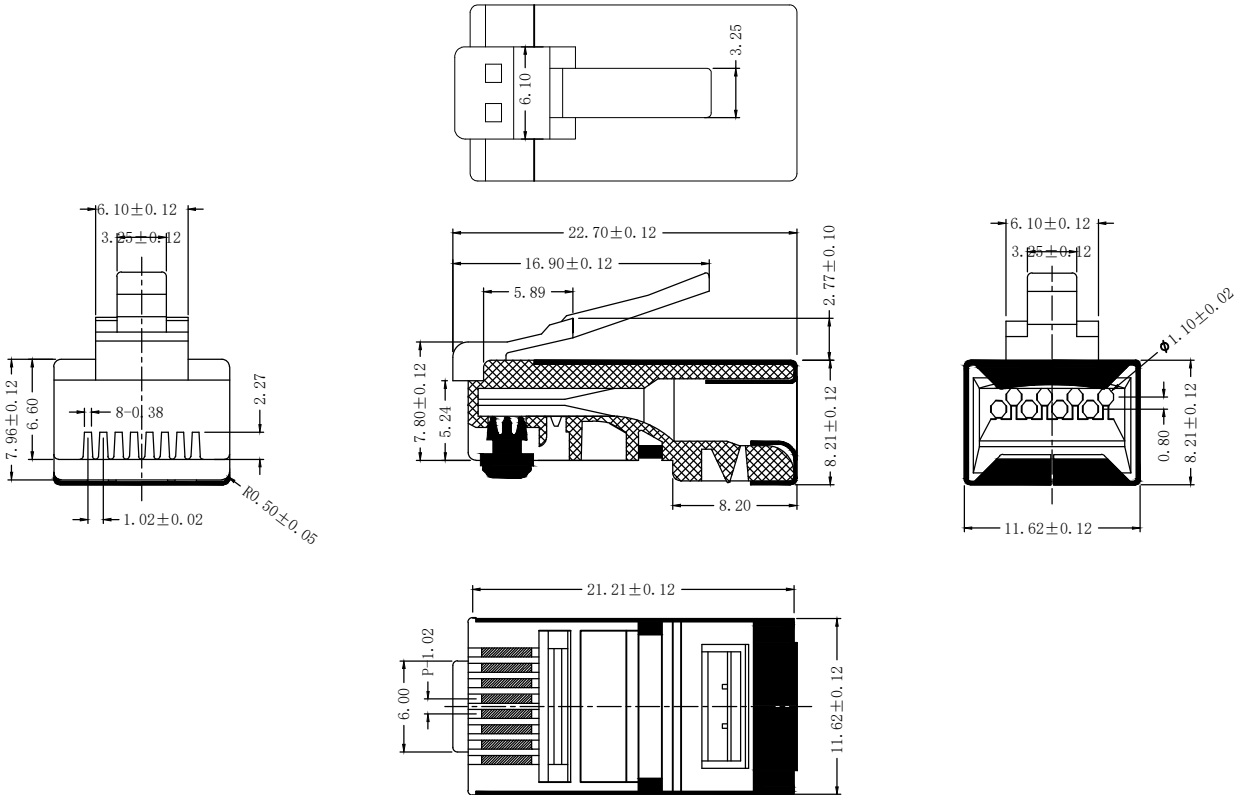


产品名称:  
六类屏蔽水晶头 双排 平三叉镀1U"

- 1. 塑胶壳采用进口PC原料
- 2. 端子采用C2680铜材
- 3. 屏蔽壳采用铁壳镀镍
- 3. 镀工艺: 先镀50U" 金属镍. 然后接触点镀金1U"



品名规格 DESCRIPTION	CONN MOD PLUG 8P8C SHIELDED CAT6				页次 SHEET	1/1	
产品编号 PRODUCT NO	RJ45-6F	单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0

DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED	第三视角法 THIRD ANGLE PROJECTION	制图 DRAWN	王辉	日期 DATE	2022.07.21
		核对 CHECK	李勇波	日期 DATE	2022.07.21
		批准 APPRO	夏赞华	日期 DATE	2022.07.21

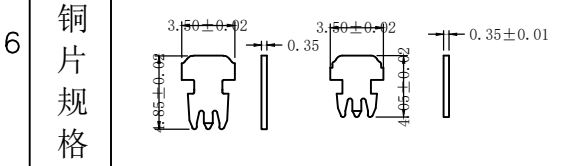

胶壳 PC(聚碳酸酯)	<input type="checkbox"/> 94-V0	<input checked="" type="checkbox"/> 94-V2	1	
金片 (PIN针) Contacts	<input checked="" type="checkbox"/> 黄铜 Brass	<input type="checkbox"/> 磷铜 Phosphor copper	8	
	<input type="checkbox"/> G/F"	<input checked="" type="checkbox"/> 1u"		<input type="checkbox"/> 3u"
	<input type="checkbox"/> 15u"	<input type="checkbox"/> 30u"	<input type="checkbox"/> 50u"	<input type="checkbox"/> S"

A		B		C		D		E		F		G		H	
---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--