


Connector Location A

Connector Location B

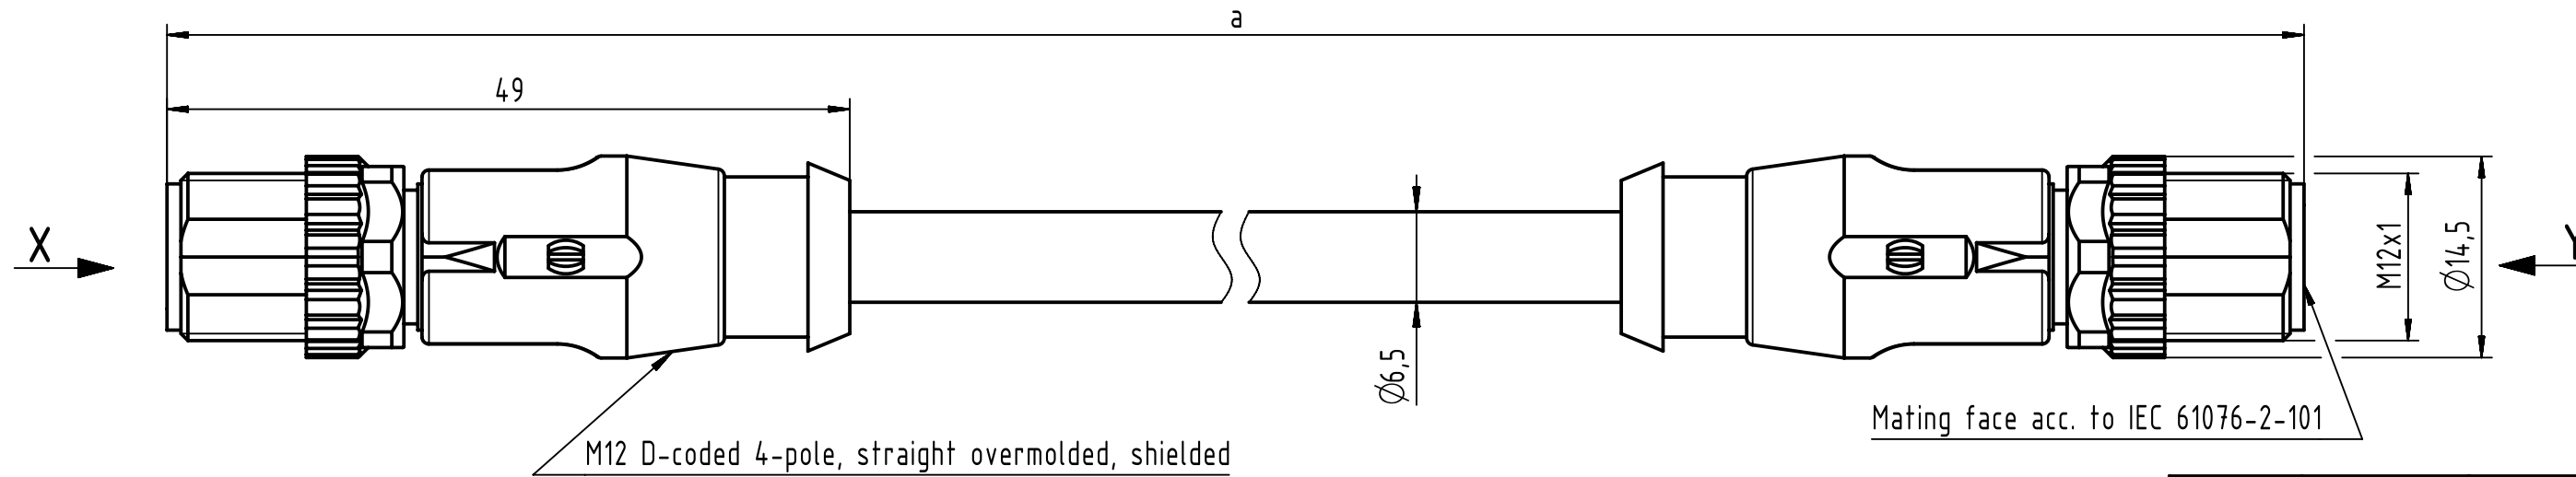




M12 D-coded 4-pole, straight overmolded, shielded

Mating face acc. to IEC 61076-2-101

X
male

Loading Plan

Y
male

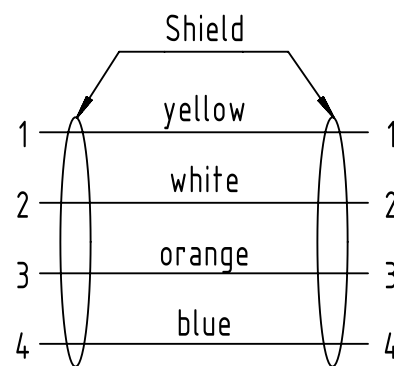

length in "1m" step	100	XXX=000
	99	XXX=990

	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098

	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
0.1	XXX=001	
Step	a [m]	XXX

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213492924XXXXX
Type of cable	XX
PVC, green, 4xAWG22/7	XX=05
PUR, green, 4xAWG22/7	XX=77

- Protection level: IP65/67
- Temperature range: -30°C ... +70°C

		All rights reserved Department HCS - RO		Created by BANCIUD Banciu		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2019-03-01		State Final Release	
HARTING Customised Solutions D-32339 Espelkamp				Title M12 Cable Assembly D-cod st/st m/m				Doc-Key / ECM-Nr. 100588528/UGD/000/F 50000014.8052					
Type TB		Number 213492924XXXXX		Rev. F		Page 1/1							