

-			
		 <u> </u>	



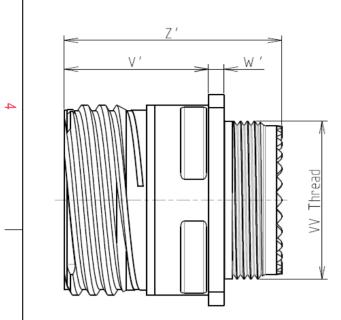



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 2000 hours		

: 11.6 g ± 10%

8D 0

G

11

J

22

В

F

В


Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V'	19.5+1.4/-0	
W'	2.1/3.65	
Ζ'	32 Max	
VV THREAD	M15x1-6g	


ORIENTATION : B

CONTACT LAYOUT : 11-22

CONTACT TYPE : SOCKET(500 Matings)

Е



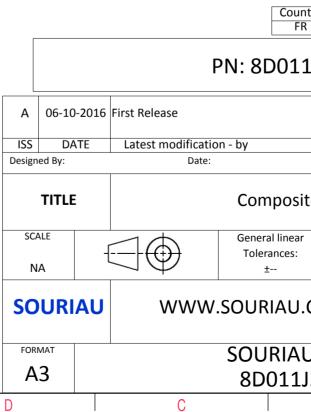

	ω		A			
					4	
					3	
S EXA	AMPLE				0	
s whic er of t	iny non-conformity or damage which does not comply with of the Parties or by a third party ation, technical notice.)					
untry FR	Jurisdiction & Control List Not Listed					
.1J2	J22BB					
				MOD N°		
		CUSTOMER	RDRAWING			
site	e Receptacle 8D series					
ar :			PROJECT 59		1	
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
LJZ.	2BB-C B		A	1/2	J	

		Contact Layout						Panel Cuto
4	(22*				20 20	UARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905				y (ØI
ى	C D	-1.905 -1.905 -1.905 1.905					¢ V	im ØA AA R1 ØT
	-						SOURIAU shall not b due to a use of th the Specifications issu (professional	e Products w ed by either
N							PN	Coun FR : 8D011
					A ISS Designe	DATE	First Release Latest modification - b Date:	у
_					SCA NA	-		Composit General linear Tolerances: ±
						URIAU		
					FORM			OURIAU 8D011J
	Н	G	F	E	D		С	

Т

ш

т

G

0

