


VIEW ON MATING SIDE

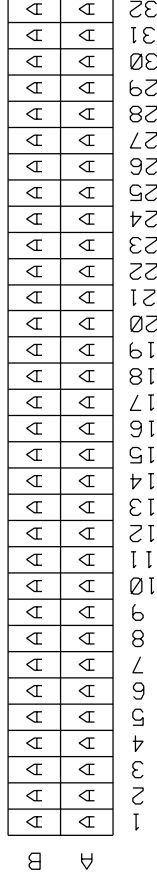

A = 64 CONTACTS L=4,5

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85040-0001 sht.1
Technical Data	PS-85042-0001

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR $\pm 2^\circ$ INCH METRIC		DRWG BY	SIGN
3 PLACE \pm .	\pm	Cc	
2 PLACE \pm .	\pm	CHK'D BY	SIGN
1 PLACE \pm .	\pm	KN	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DESIGN DIMENSION <input type="checkbox"/> MM <input type="checkbox"/> IN.			
EQUIVALENT DIMENSION <input type="checkbox"/> MM <input type="checkbox"/> IN.			
IF TWO DIMENSIONS ARE SHOWN, THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY			
REVISIONS		FOR PREVIOUS REVISIONS SEE MRI LIST	
ECN 2264	Produkt spec.	96-10-18 KN	
Contact symbol		Contact position number	
A		a1-32 b1-32	
Performance level		Perform.	

CAD/CAM PROJECT NAME s8504000 s51	REVISE ONLY ON CAD SYSTEM	SH. REV.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE 64 pos. female connector acc. DIN 41612 style B contacts arrangement		
SHEET NO. DATE 1 OF 1 96/05/15		SIZE A
PART NO. DWG NO. 85040-0050 SDA-85040-0050		