

MODEL 716 - INCREMENTAL SHAFT ENCODER



FEATURES

The original industry-standard Cube
 Versatile housing styles
 Quadrature output
 New resolutions to 10,000 CPR

The Model 716 Accu-Coder™ is ideally suited for applications requiring a quadrature output. Designed for compatibility with most programmable controllers, electronic counters, motion controllers, and motor drives, it is ideally suited for industrial applications where it is important that the direction of rotation be known. Critical performance specifications for the most popular resolutions and advanced Opto-ASIC circuitry – a single chip design that eliminates many board level components – increase the reliability of an already dependable and durable encoder. With new options continually being added, the Model 716 excels in a wide variety of industrial applications.

COMMON APPLICATIONS

Feedback for counters, PLCs & motors, cut-to-length, labeling, measuring for packaging, filling & material handling machines, wire winding, film extrusion

MODEL 716 ORDERING GUIDE

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

716	0256	1	N	S	HD1	6	S	S	N	
MODEL 716 Quadrature Cube	INDEX PULSE Blank No index 1 Index Pulse	OUTPUT TYPE S Pull-Up resistor O Open Collector PP Push-Pull HV Line Driver		SHAFT DIAMETER⁵ 4 1/4", 0.250" ⁶ 5 5/16", 0.3125" ⁷ 6 3/8", 0.375" 8 1/2", 0.500" ⁸ 10 5/8", 0.625" ⁸		CONNECTOR TYPE¹⁰ S Standard 6-pin MS Y 7-pin MS X 10-pin MS J 5-pin M12 (12 mm) ⁹ K 8-pin M12 (12 mm) ⁹ G Gland nut – 18" cable ¹¹ T Solder or screw terminal ¹² B Solder terminal with conduit box			MATING CONNECTOR N No connector Y Yes	
CYCLES PER REVOLUTION (CPR) 1-10,000 See CPR Options below for available resolutions. (601 and above is a price adder)	PULSE POLARITY¹ P Positive N Negative		HOUSING TYPE S 2.25" Standard housing S1 2.25" Standard housing with IP50 felt shaft seal ² IND12 Industrial housing with IP66 shaft seal HD1 3" x 3" x 6" Heavy Duty housing ³ HD3 Heavy Duty housing with conduit connector & terminal strip HD5 Heavy Duty housing with 10 mm outer bearing ³ HD10 Heavy Duty housing with ultra heavy duty bearings, 0.625" or 0.500" shaft ³ HD12 Heavy Duty housing with IP66 outer shaft seal ³ HD14 Heavy Duty housing with IP66 shaft seal and with conduit connector & terminal strip 5PY Standard Cube with 5PY adaptor ⁴ EX Explosion-proof housing			SHAFT TYPE S Single D Double ended ⁹		NOTES: 1 Complete only if Index Pulse option is selected. 2 Available with 0.250" shaft only. 3 Only available with 6-pin MS or Screw Terminal Connector Types. 4 Only available with 5/16", 0.3125" shaft. 5 Contact Customer Service for custom shaft lengths and diameters. 6 Standard housing only. 7 Standard or 5PY housing only. 8 HD10 housing only. 9 Not available for HD or EX housings. 10 For mating connectors, cables, and cordsets see Accessories at encoder.com. For Connector Pin Configuration Diagrams, see Technical Information or see Connector Pin Configuration Diagrams at encoder.com. 11 For non-standard cable lengths, add a forward slash (/) plus cable length expressed in feet. Example: G/6 = 6 feet of cable. For CPR > 2500. Standard cable length only. 12 Screw terminals available for HD and EX housings. Solder terminals available for S and S1 housings.		

Model 716 CPR Options

0001 thru 0189*	0193	0198	0200	0205	0210	0240	0250	0256
0276	0298	0300	0305	0308	0315	0333	0336	0350
0400	0480	0500	0512	0580	0597	0600	0700	0720
0960	1000	1024	1200	1250	1270	1500	1800*	2000
2500	3000	3600*	4096	5000	6000	7200*	8192	10,000

*Contact Customer Service for availability.

Contact Customer Service for other disk resolutions. Not all disk resolutions available with all output types.

MODEL 716 - INCREMENTAL SHAFT ENCODER

MODEL 716 SPECIFICATIONS

Common to all Cube Housing Styles

Electrical

Input Voltage.....	4.75 to 28 VDC max for temperatures up to 85° C 4.75 to 24 VDC for temperatures between 85° C and 100° C.
Input Current.....	.80 mA maximum with no output load
Input Ripple.....	.100 mV peak-to-peak at 0 to 100 kHz
Output Format.....	Incremental – Square wave with single channel
Output Types.....	Open Collector – 250 mA max per channel Pull-Up – Open Collector with 1.5K ohm internal resistor, 250 mA max per channel Push-Pull – 20 mA max per channel Line Driver – 20 mA max per channel (Meets RS 422 at 5 VDC supply)
Max Frequency.....	1 to 2500 CPR 125 kHz, 2501 to 5000 CPR 250 kHz, 5001 to 10,000 CPR 500 kHz
Electrical Protection.....	Reverse voltage and output short circuit protected. NOTE: Sustained reverse voltage may result in permanent damage.
Index.....	Once per revolution. 1 to 400 CPR: Ungated 401 to 10,000 CPR: Gated to output A See Waveform Diagrams.
Quadrature Edge Separation.....	.67.5° electrical or better is typical, 54° electrical minimum at temperatures > 99° C
Rise Time.....	Less than 1 microsecond
Accuracy.....	Within 0.05° mechanical from one cycle to any other cycle, or 3 arc minutes.

Mechanical

Max Speed.....	6000 RPM. Higher shaft speeds achievable, contact Customer Service.
Shaft Material.....	.303 Stainless Steel
Housing.....	Black non-corrosive finished 6063-T6 aluminum
Bearings.....	Precision ABEC ball bearings

Environmental

Operating Temp.....	0° to 85° C
Storage Temp.....	-25° to 85° C
Humidity.....	98% RH non-condensing
Vibration.....	.10 g @ 58 to 500 Hz
Shock.....	.50 g @ 11 ms duration



STANDARD CUBE HOUSING (S, S1) SPECIFICATIONS

Mechanical



Shaft Type.....	Single or double-ended (specify choice)
Radial Loading.....	15 lb maximum (0.250" diameter shaft) 40 lb maximum (0.375" diameter shaft)
Axial Loading.....	10 lb maximum (0.250" diameter shaft) 30 lb maximum (0.375" diameter shaft)
Starting Torque.....	.013 oz-in typical for 0.250" shaft .038 oz-in typical for 0.375" shaft
Moment of Inertia.....	.65 x 10 ⁻⁶ oz-in-sec ²
Weight.....	10 oz for standard housing

STANDARD CUBE HOUSING (S, S1)

Cube Housing with 1/4" Shaft (4)

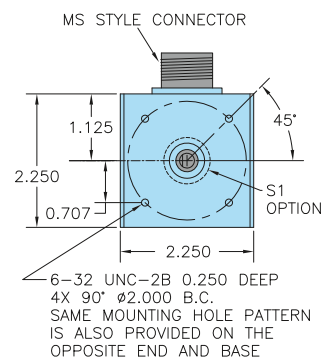


Cube Housing with 3/8" Shaft (6)

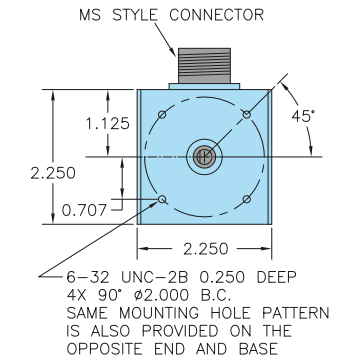


WAVEFORM DIAGRAM

Line Driver and Push-Pull

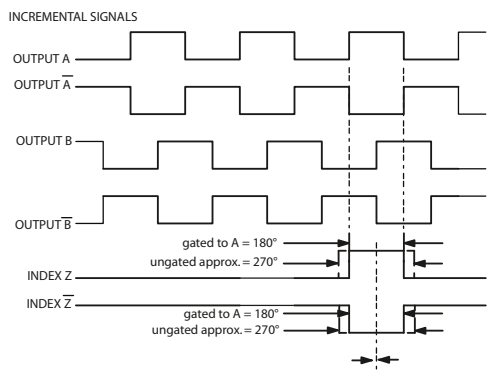

Open Collector and Pull-Up

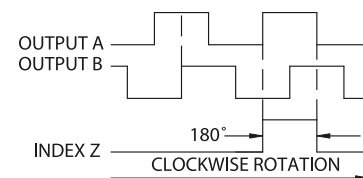

CLOCKWISE ROTATION AS VIEWED FROM THE MOUNTING FACE

NOTE: ALL DEGREE REFERENCES ARE ELECTRICAL DEGREES. Waveform shown with optional complementary signals \bar{A} , \bar{B} , \bar{Z} for HV output only.

MODEL 716 - INCREMENTAL SHAFT ENCODER

WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable. Trim back and insulate unused wires.

Function	Gland Cable [†] Wire Color	5-pin M12	8-pin M12	10-pin MS HV	7-pin MS HV	7-pin MS O, S, PP	6-pin MS HV, No index	6-pin MS O, S, PP	Term. Block HV, No index	Term. Block O, S, PP
Com	Black	3	7	F	F	F	A	A,F	1	1,6
+VDC	Red	1	2	D	D	D	B	B	2	2
A	White	4	1	A	A	A	C	D	3	4
A'	Brown	--	3	H	C	--	D	--	4	--
B	Blue	2	4	B	B	B	E	E	5	5
B'	Violet	--	5	I	E	--	F	--	6	--
Z	Orange	5	6	C	--	C	--	C	--	3
Z'	Yellow	--	8	J	--	--	--	--	--	--
Case	Green	--	--	G	G	G	--	--	--	--
Shield	Bare	--	--	--	--	--	--	--	--	--

[†]Standard cable is 24 AWG conductors with foil and braid shield.

CUBE PIVOT MOUNTING BRACKETS

176430-01 Single Pivot

176431-01 Double Pivot

176430-02 Spring Loaded Single Pivot

176431-02 Spring Loaded Double Pivot

Encoder sold separately.

Dual Wheel



Single Wheel (shown with Torsion Spring)



CUBE HOUSINGS

INDUSTRIAL CUBE HOUSING (IND12)


This more robust unit meets requirements between Standard and Heavy Duty housings while retaining the Cube design. The Industrial 12 (IND12) model features an IP66 shaft seal. The tough, sealed aluminum housing has a wall thickness of 0.187" and offers greater protection from wash down, sprays, dust, moisture, shock, vibration, and other hazards found in industrial environments.

INDUSTRIAL CUBE HOUSING (IND12) SPECIFICATIONS

Refer to all Standard Cube Housing specifications except as follows

Mechanical

- Shaft Size0.375" diameter
- Shaft Type.....Single- or double-ended shaft available
- Radial Loading.....40 lb maximum
- Axial Loading.....30 lb maximum
- Starting Torque3 oz-in starting torque w/IP66 shaft seal

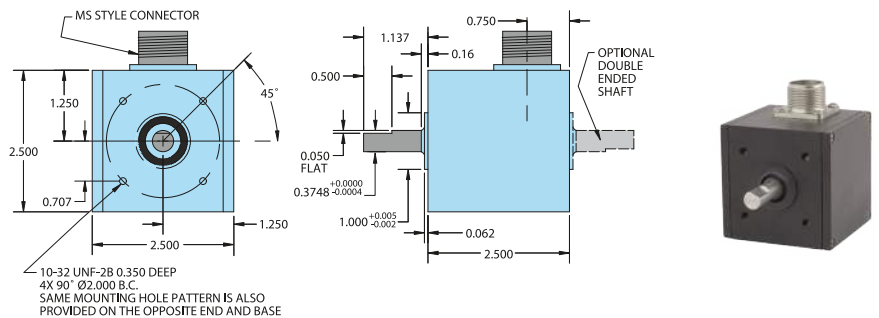


HEAVY DUTY CUBE HOUSING (HD12)

The Heavy Duty housing uses a separate 0.375" diameter external shaft and bearing assembly to rotate the shaft of an internally mounted Cube Housing. This provides mechanical isolation from external loads and stress. A flexible coupling between the external shaft and the encoder protects the internal unit from axial and radial loading. The 0.250" aluminum walls protect the encoder from external shock, vibration, and the outside environment.

HEAVY DUTY HOUSING (HD12) OPTIONS

- HD1Heavy Duty 3" x 6" housing
- HD3Heavy Duty w/conduit connector (threaded for 0.500" NPT Conduit) and terminal strip
- HD5Heavy Duty w/10 mm outer bearing
- HD12*Heavy Duty w/IP66 rated outer shaft seal
- HD14*Heavy Duty w/IP66 rated outer shaft seal, conduit connector (threaded for 0.500" NPT Conduit), and terminal strip


*These units have an outer boss diameter of 1.000"

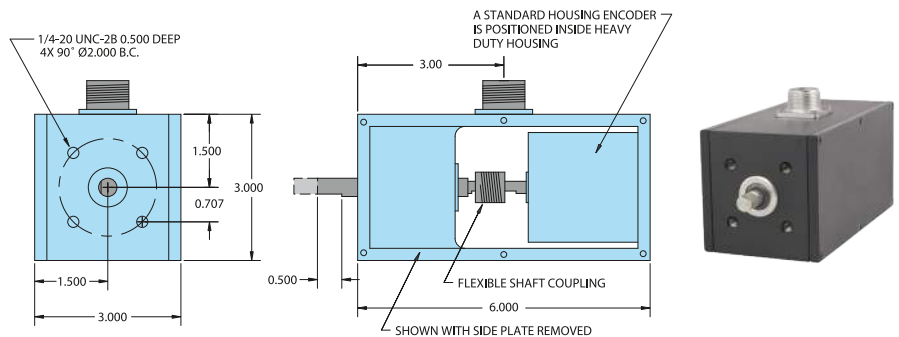

HEAVY DUTY CUBE HOUSING (HD12) SPECIFICATIONS

Refer to all cube specifications except as follows:

- Mechanical**
- Max Speed.....6000 RPM
 - Shaft Size0.375"
 - RotationEither direction
 - Radial Loading.....40 lb maximum (50 lb for HD 5)
 - Axial Loading.....30 lb maximum (35 lb for HD 5)
 - Bearings.....Precision ABEC ball bearings
 - Starting Torque1 oz-in; 3 oz-in w/IP66 seal
 - Mounting.....Tapped holes face and base
 - Weight3.25 lb

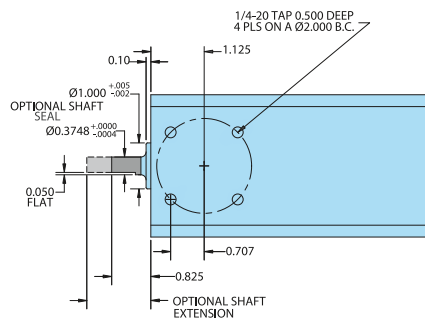

All dimensions are in inches with a tolerance of +0.005" or +0.01" unless otherwise specified

CUBE HOUSINGS



ULTRA HEAVY DUTY CUBE HOUSING (HD10)

The HD10 Ultra Heavy Duty encoder is designed for use in applications with severe shaft loading conditions. The HD10 offers two shaft sizes: 0.500" and 0.625". Shaft material is 303 stainless steel. Bearings are conservatively rated at 95 lb radial and 60 lb axial shaft loading. IP66 shaft seal is standard on all units. The HD10 Ultra Heavy Duty housing uses a larger external shaft and R10 bearing assembly to rotate the shaft of an internally mounted Cube Housing. This provides mechanical isolation from external loads and stress. A flexible coupling between the external shaft and the encoder protects the internal unit from axial and radial loading. The 0.250" aluminum walls protect the encoder from external shock, vibration, and the outside environment.

ULTRA HEAVY DUTY CUBE HOUSING (HD10) SPECIFICATIONS

Mechanical

Max Speed.....	6000 RPM
Shaft Size.....	0.500" or 0.625"
Rotation.....	Either direction
Radial Loading.....	95 lb operating
Axial Loading.....	60 lb operating
Bearings.....	ABEC precision ball bearings
Bearing Life.....	15,000 hours at rated load
Starting Torque.....	3 oz-in IP66 rated
Mounting.....	Tapped holes face and base
Weight.....	3.85 lb

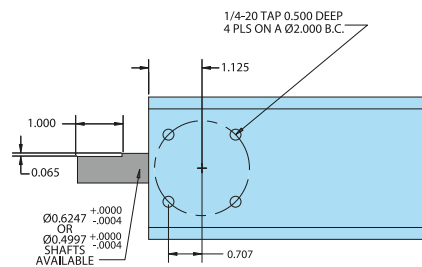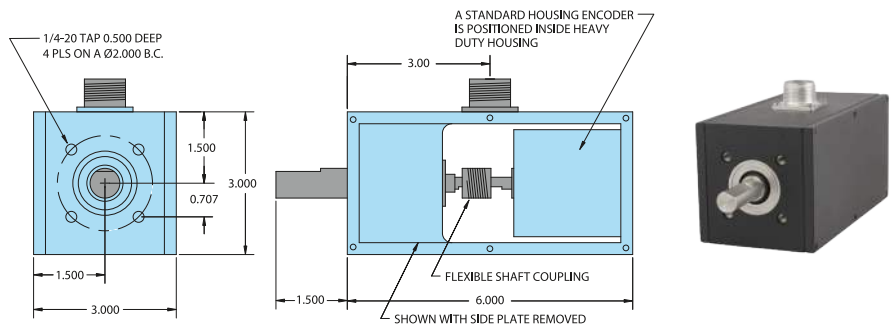

EXPLOSION-PROOF HOUSING (EX)

An explosion-proof housing is available for installing the Cube Series Accu-Coder™ in hazardous locations. The Cube Series encoder is mounted within the explosion-proof housing and is coupled to the 0.375" shaft assembly by a flexible shaft coupling. This decreases radial and axial loading on the internal encoder shaft and bearings to ensure long life. Electrical connection to the Accu-Coder™ is by an internal barrier terminal strip. A threaded hole for 0.500" NPT conduit is provided.

EXPLOSION-PROOF HOUSING (EX) SPECIFICATIONS


The explosion-proof housing is designed to meet the following:

- NEC Class 1, Groups C and D
- NEC Class 2, Groups E, F, and G
- UL Standard 1203
- Class 1, Division 1, Groups C and D
- Class 2, Division 1, Groups E, F, and G
- CSA Standard C 22.2 No. 30-M 1986
- NEMA 7 and NEMA 9

Refer to all cube specifications except as follows:

Mechanical

Max Speed.....	4000 RPM
Radial Loading.....	30 lb operating
Axial Loading.....	10 lb operating
Weight.....	6 lb
Finish.....	Unpainted Aluminum

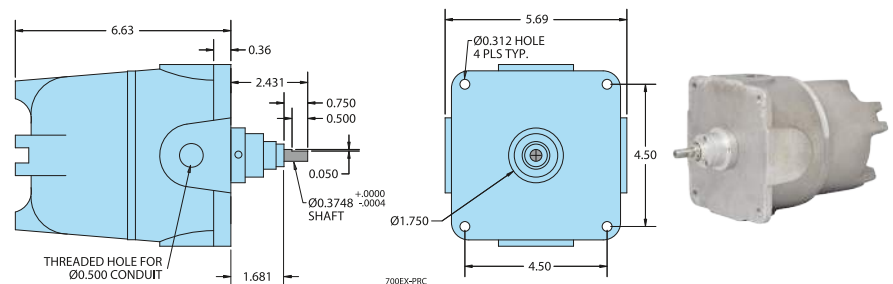


All dimensions are in inches with a tolerance of +0.005" or +0.01" unless otherwise specified

CUBE HOUSINGS

CUBE SERIES OPTIONAL 5PY ADAPTOR (STOCK #175443)

The all aluminum optional 5PY adaptor allows any standard housing Cube Series encoder to replace DC tachometer technology. The 5PY adaptor is interchangeable with any 5PY tach generator.

Order standard housing Cube Series Accu-Coder™ with 5/16" shaft and specify part #175443.

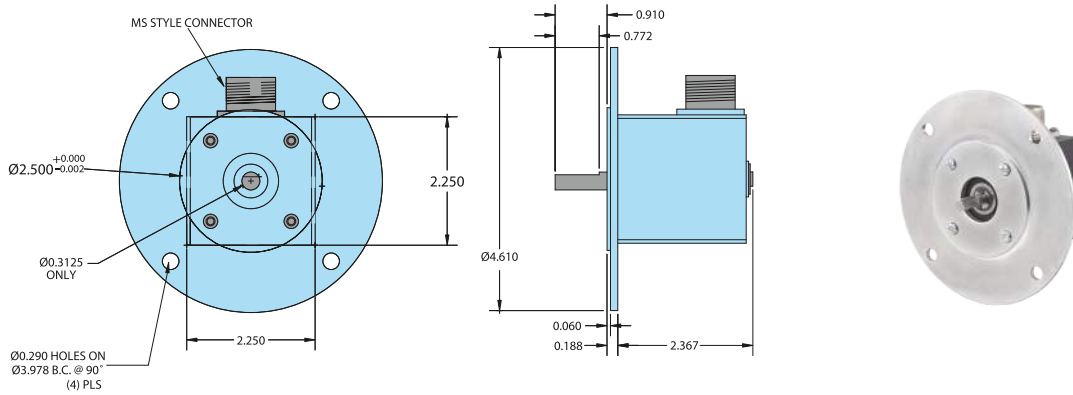

All dimensions are in inches with a tolerance of +0.005" or +0.01" unless otherwise specified