


Accessory for SIRIUS 3RM1 3-phase busbar for 3 motor starters Modular spacing 22.5 mm Screw connection system



General technical data		
product brand name		SIRIUS
product designation		3-phase busbar
design of the product		For 3 motor starters
suitability for use		Motor starter 3RM1
product function short circuit protection		No
installation altitude at height above sea level maximum	m	2 000
ambient temperature		
• during operation	°C	-25 ... +60
• during transport	°C	-40 ... +70
• during storage	°C	-40 ... +70
insulation voltage rated value	V	500
reference code acc. to IEC 81346-2		X
Main circuit		
relative symmetrical tolerance of the operating voltage	%	10
ampacity maximum	A	25
operational current at AC at 480 V acc. to UL 508	A	16
Installation/ mounting/ dimensions		
mounting position		any
fastening method		screw fixing
width	mm	69
height	mm	41
depth	mm	12
Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity

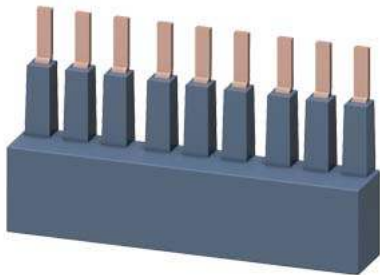

[Miscellaneous](#)

Test Certificates	other	Railway
-------------------	-------	---------

[Type Test](#)

[Confirmation](#)

[Special Test](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1910-1BA>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1910-1BA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RM1910-1BA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RM1910-1BA&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1910-1BA&lang=en)

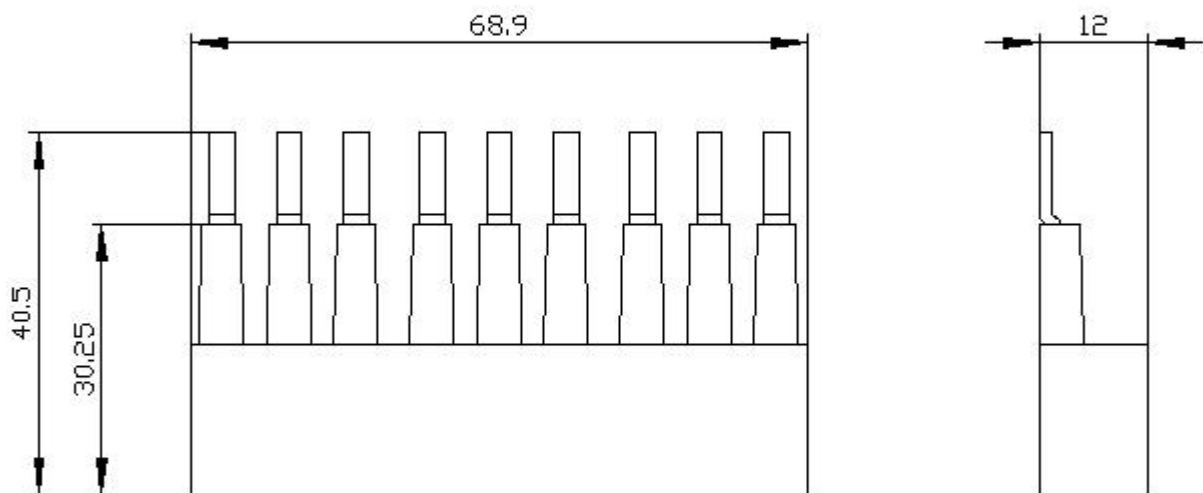

last modified:

12/16/2020