
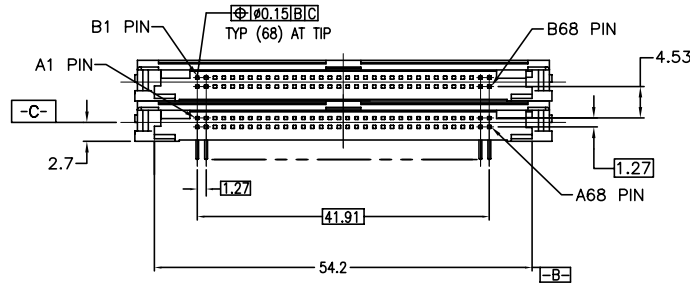
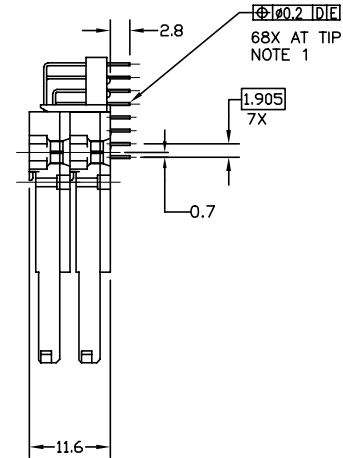


PRODUCT NO.	DIM X			MOUNTING STYLE	COLOR
	4.25±0.1	3.5±0.1	5.0±0.1		
92821-000	OTHERS	36,67	1,17,34 35,51,68	TOP W\O LOCATOR	BLACK
92821-000LF	OTHERS	36,67	1,17,34 35,51,68	TOP W\O LOCATOR	BLACK



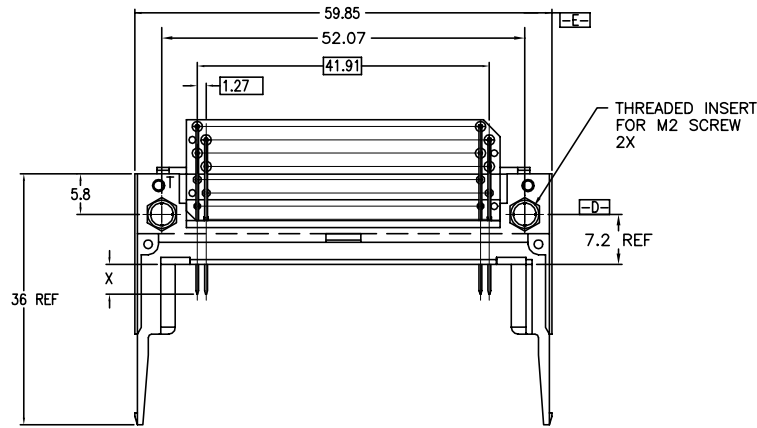


NOTES:

- TRUE POSITION IS A FREE GRID TO THE PIN PATTERN ITSELF.
- SEE TA-946 FOR PCB LAYOUT.
- MATERIAL:
PLASTIC: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PIN: COPPER ALLOY
- FINISH (PIN):
UNDER PLATING: 0.5 µM MIN. Ni
CONTACT AREA: 0.076 µM MIN. GOLD
SOLDER AREA: 2.5 µM MIN. Sn-Pb OR 2.5µM MIN PURE Sn FOR -XXXLF
- PRODUCT SPEC: 110-263

mat'l. code		surface ISO1302		tolerance ISO406 ISO1101		projection		product family PCMCIA	
l'tecn nodr		date		tolerances unless otherwise specified		MM		title	
L	ELX-N-007962	ZK	11/01/11	angle	0.X±0.3	MM		68 POSITION DOUBLE DECK	
M	ELX-N-011432	ZK	04/23/12	0°±2'	0.XX±0.13	scale 2:1		TYPE-123 EJECT HEADER	
F	V41226	RDS	08/18/94		0.XXX±0.05				
G	V41439	RDS	09/30/94	dr	D.SHEAFFER	06/09/93		dwg no	
H	T40309	MSC	02/02/95	engr	D.BRANN	06/09/93		sheet 1 of 7	
J	V12164	TFG	08/17/01	chr	D.BRANN	06/09/93		size	
K	N05-0052	WB	02/25/05	appd	D.BRANN	06/09/93		A4	
sheet index		revision		type		Product		Customer Drawing	
		1	2	3	4	5	6	7	

PRODUCT NO.	DIM X			MOUNTING STYLE	COLOR
	4.25±0.1	3.5±0.1	5.0±0.1		
92821-003	OTHERS	36,67	1,17,34 35,51,68	TOP W\LOCATOR	BLACK
92821-003LF	OTHERS	36,67	1,17,34 35,51,68	TOP W\LOCATOR	BLACK

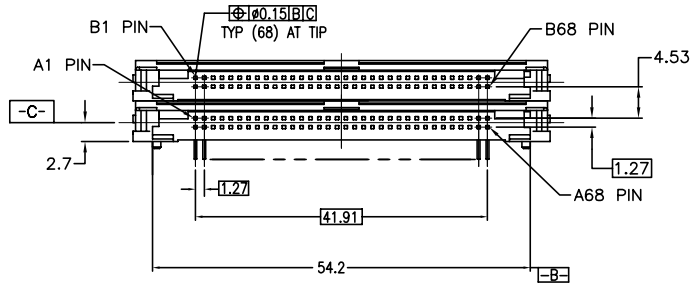
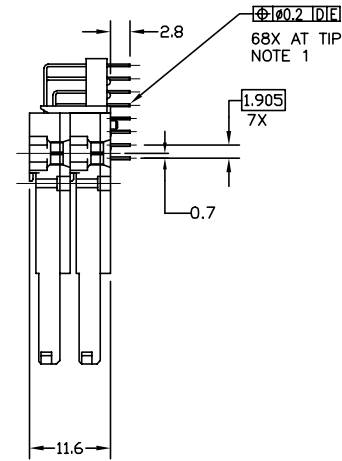
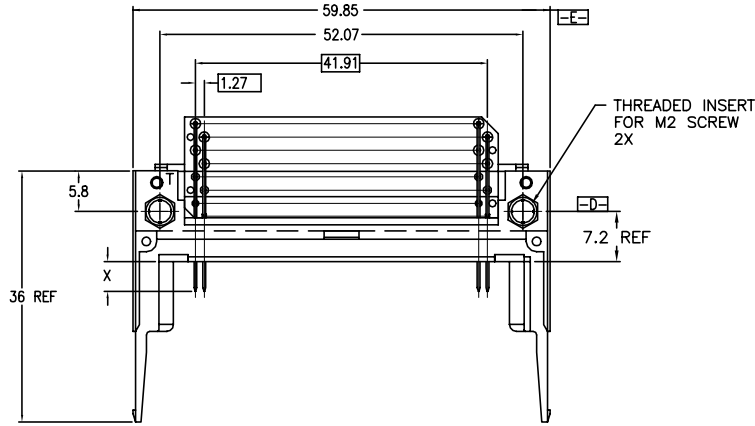


NOTES:

- TRUE POSITION IS A FREE GRID TO THE PIN PATTERN ITSELF.
- SEE TA-946 FOR PCB LAYOUT.
- MATERIAL:
PLASTIC: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PIN: COPPER ALLOY
- FINISH (PIN):
UNDER PLATING: 0.5 µM MIN. Ni
CONTACT AREA: 0.076 µM MIN. GOLD
SOLDER AREA: 2.5 µM MIN. Sn-Pb OR 2.5µM MIN PURE Sn FOR -XXXLF
- PRODUCT SPEC:110-263

mat'l. code	surface ISO1302	tolerance ISO406 ISO1101	projection MM	product family PCMCIA
trtecn nodr	date	tolerances unless otherwise specified	scale:2:1	title 68 POSITION DOUBLE DECK TYPE-123 EJECT HEADER
M		angle 0°±2'		dwg no 92821
		dr D.SHEAFFER 06/09/93		sheet 2 of 7
		engr D.BRANN 06/09/93		size A4
		chr D.BRANN 06/09/93		type Product Customer Drawing
		appd D.BRANN 06/09/93		
sheet index	revision sheet			

PRODUCT NO.	DIM X			MOUNTING STYLE	COLOR
	4.25±0.1	3.5±0.1	5.0±0.1		
92821-500	OTHERS	36,67	1,17,34 35,51,68	BOTTOM W\O LOCATOR	NATURAL
92821-500LF	OTHERS	36,67	1,17,34 35,51,68	BOTTOM W\O LOCATOR	NATURAL

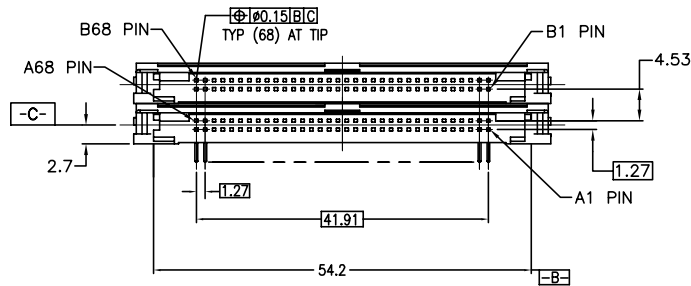
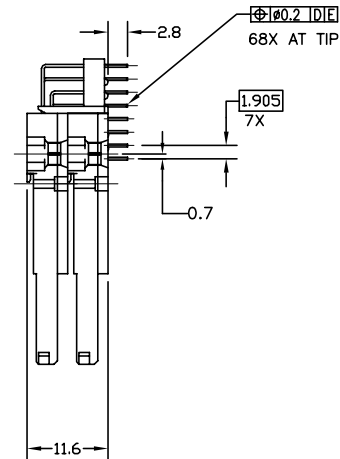
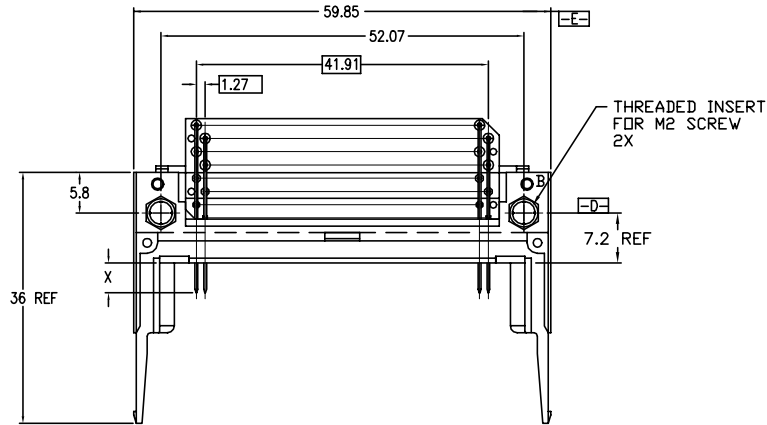


NOTES:

- TRUE POSITION IS A FREE GRID TO THE PIN PATTERN ITSELF.
- SEE TA-946 FOR PCB LAYOUT.
- MATERIAL:
PLASTIC: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PIN: COPPER ALLDY
- FINISH (PIN):
UNDER PLATING: 0.5 µM MIN. NI
CONTACT AREA: 0.076 µM MIN. GOLD
SOLDER AREA: 2.5 µM MIN. Sn-Pb OR 2.5µM MIN PURE Sn FOR -XXXLF
- PRODUCT SPEC: 110-263

mat'l. code	surface ISO1302 ✓	tolerance ISO406 ISO1101	projection MM	product family PCMCIA
l trechn nodr date	tolerances unless otherwise specified		scale 2:1	title 68 POSITION DOUBLE DECK TYPE-123 EJECT HEADER
M	angle 0°±2'	0.X±0.3 0.XX±0.13 0.XXX±0.05	MM	dwg no 92821
	dr D.SHEAFFER	06/09/93	FCI	sheet 3 of 7
	engr D.BRANN	06/09/93		size A4
	chr D.BRANN	06/09/93		type Product Customer Drawing
	appd D.BRANN	06/09/93		
sheet index	revision sheet			

PRODUCT NO.	DIM X			MOUNTING STYLE	COLOR
	4.25±0.1	3.5±0.1	5.0±0.1		
92821-503	OTHERS	36,67	1,17,34 35,51,68	BOTTOM W\LOCATOR	NATURAL
92821-503LF	OTHERS	36,67	1,17,34 35,51,68	BOTTOM W\LOCATOR	NATURAL

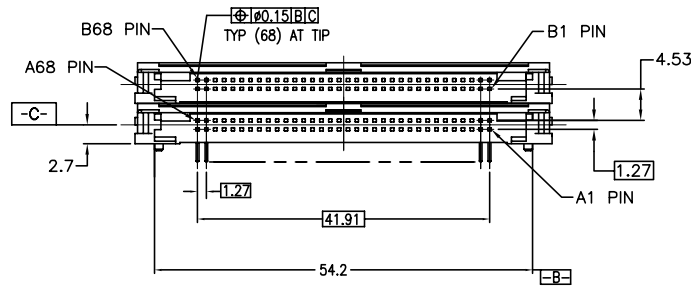
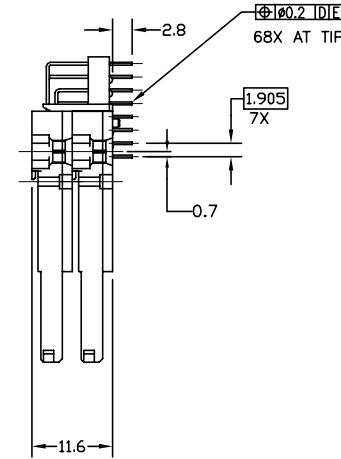
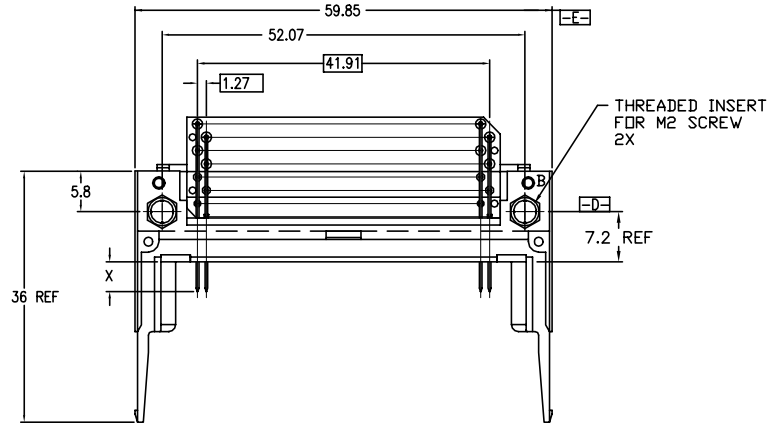


NOTES:

- TRUE POSITION IS A FREE GRID TO THE PIN PATTERN ITSELF.
- SEE TA-946 FOR PCB LAYOUT.
- MATERIAL:
PLASTIC: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PIN: COPPER ALLOY
- FINISH (PIN):
UNDER PLATING: 0.5 µM MIN. Ni
CONTACT AREA: 0.076 µM MIN. GOLD
SOLDER AREA: 2.5 µM MIN. Sn-Pb OR 2.5µM MIN PURE Sn FOR -XXXLF
- PRODUCT SPEC: 110-263

mat'l. code	surface ISO1302	tolerance ISO406 ISO1101	projection MM	product family PCMCIA
trnchn nodr	date	tolerances unless otherwise specified	scale 2:1	title 68 POSITION DOUBLE DECK TYPE-123 EJECT HEADER
M		angle 0°±2'		dwg no 92821
		dr D.SHEAFFER 06/09/93		sheet 4 of 7
		engr D.BRANN 06/09/93		size A4
		chr D.BRANN 06/09/93		type Product Customer Drawing
		appd D.BRANN 06/09/93		
sheet index	revision sheet			

PRODUCT NO.	DIM X			MOUNTING STYLE	COLOR	MOUNTING STYLE
	4.25±0.1	3.5±0.1	5.0±0.1			
92821-040	OTHERS	36,67	1,17,34 35,51,68	TOP W\O LOCATOR	BLACK	WITH
92821-080	OTHERS	36,67	1,17,34 35,51,68	TOP W\O LOCATOR	BLACK	WITHOUT
92821-040LF	OTHERS	36,67	1,17,34 35,51,68	TOP W\O LOCATOR	BLACK	WITH
92821-080LF	OTHERS	36,67	1,17,34 35,51,68	TOP W\O LOCATOR	BLACK	WITHOUT

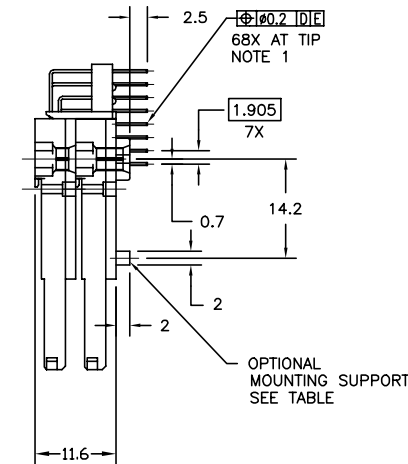
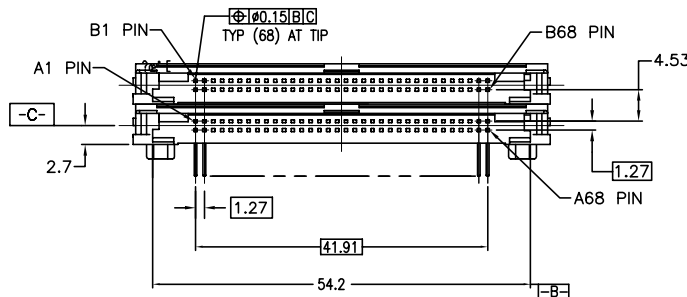
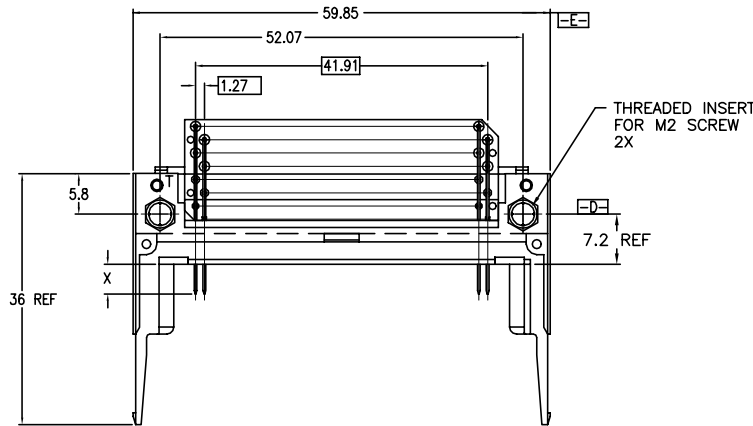


NOTES:

- TRUE POSITION IS A FREE GRID TO THE PIN PATTERN ITSELF.
- SEE TA-946 FOR PCB LAYOUT.
- MATERIAL:
PLASTIC: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PIN: COPPER ALLOY
- FINISH (PIN):
UNDER PLATING: 0.5 µM MIN. Ni
CONTACT AREA: 0.076 µM MIN. GOLD
SOLDER AREA: 2.5 µM MIN. Sn-Pb OR 2.5µM MIN PURE Sn FOR -XXXLF
- PRODUCT SPEC: 110-263

mat'l. code	surface	tolerance	projection	product family
	ISO1302	ISO406 ISO1101		PCMCIA
tr tecn nodr	date	tolerances unless other	wise specified	title
M		0.X±0.3	MM	68 POSITION DOUBLE DECK
		0.XX±0.13		TYPE-123 EJECT HEADER
		0.XXX±0.05	scale 2:1	
dr	D.SHEAFFER	06/09/93		dwg no
enr	D.BRANN	06/09/93		sheet 5 of 7
chr	D.BRANN	06/09/93		size
appd	D.BRANN	06/09/93		A4
sheet	revision			type
index	sheet			Product Customer Drawing

PRODUCT NO.	DIM X			MOUNTING STYLE	COLOR
	4.25±0.1	3.5±0.1	5.0±0.1		
92821-540	OTHERS	36,67	1,17,34 35,51,68	BOTTOM W\O LOCATOR	NATURAL
92821-540LF	OTHERS	36,67	1,17,34 35,51,68	BOTTOM W\O LOCATOR	NATURAL

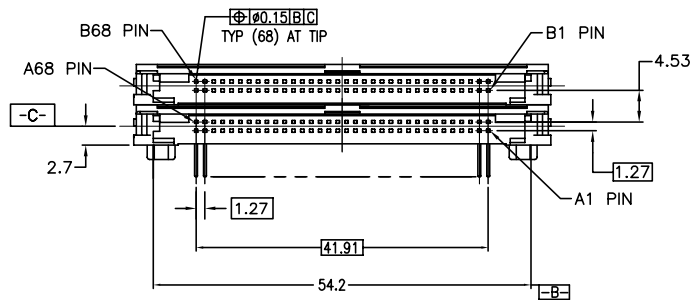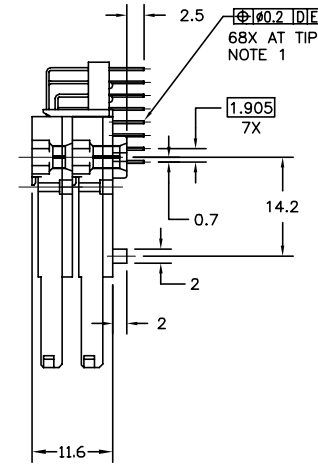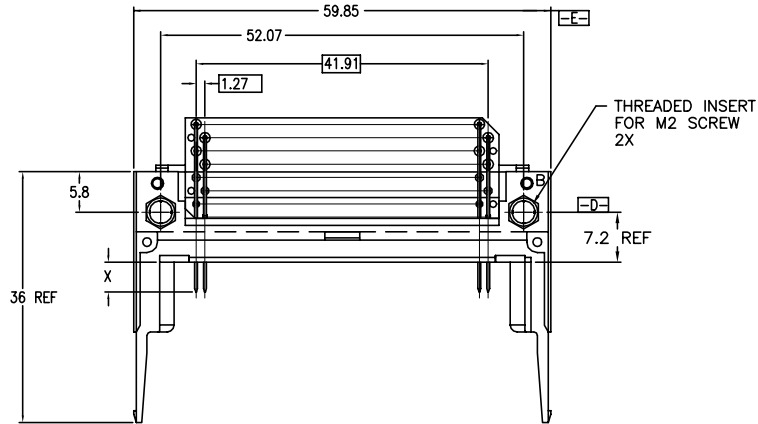


NOTES:


- TRUE POSITION IS A FREE GRID TO THE PIN PATTERN ITSELF.
- SEE TA-946 FOR PCB LAYOUT.
- MATERIAL:
PLASTIC: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PIN: COPPER ALLOY
- FINISH (PIN):
UNDER PLATING: 0.5 µm MIN. Ni
CONTACT AREA: 0.076 µm MIN. GOLD
SOLDER AREA: 2.5 µm MIN. Sn-Pb OR 2.5µm MIN PURE Sn FOR -XXXLF
- PRODUCT SPEC: 110-263

mat'l. code	surface	tolerance	projection	product family
	ISO1302	ISO406 ISO1101		PCMCIA
l trechn nodr date	tolerances unless otherwise specified		MM	68 POSITION DOUBLE DECK
M	angle	0.X±0.3	MM	TYPE-123 EJECT HEADER
	0°±2'	0.XX±0.13	scale 2:1	
		0.XXX±0.05		
dr	D.SHEAFFER	06/09/93		dwg no
enr	D.BRANN	06/09/93		sheet 6 of 7
chr	D.BRANN	06/09/93		size
appd	D.BRANN	06/09/93		A4
sheet index	revision sheet			type Product Customer Drawing

SEE SH. 1&2

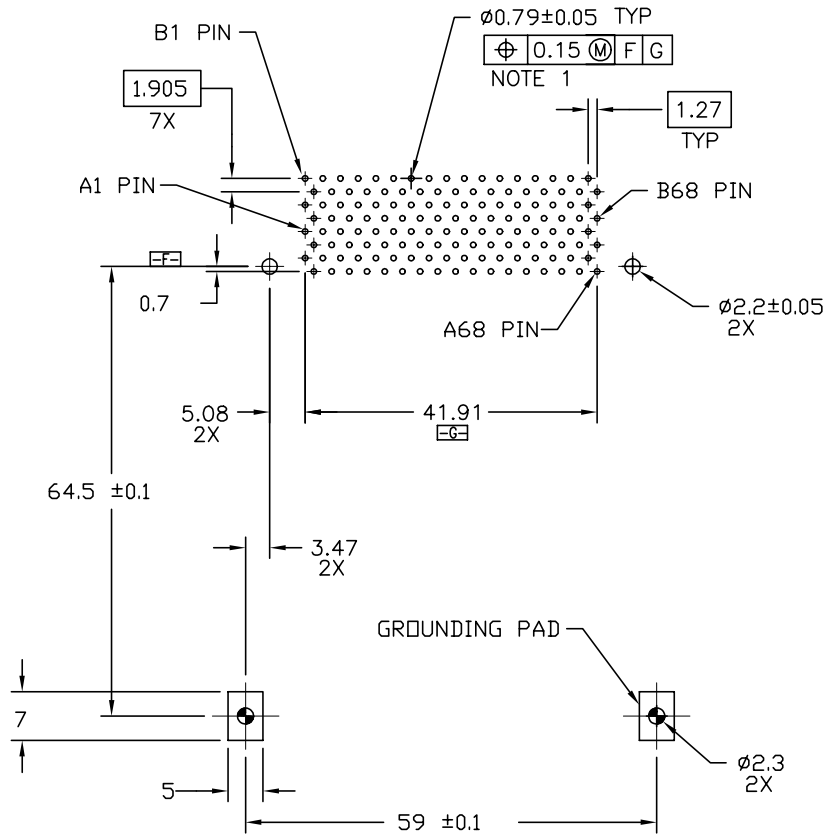

RECOMMENDED P.C.B. LAYOUT
FOR TOP MOUNTED
SCALE 2/1

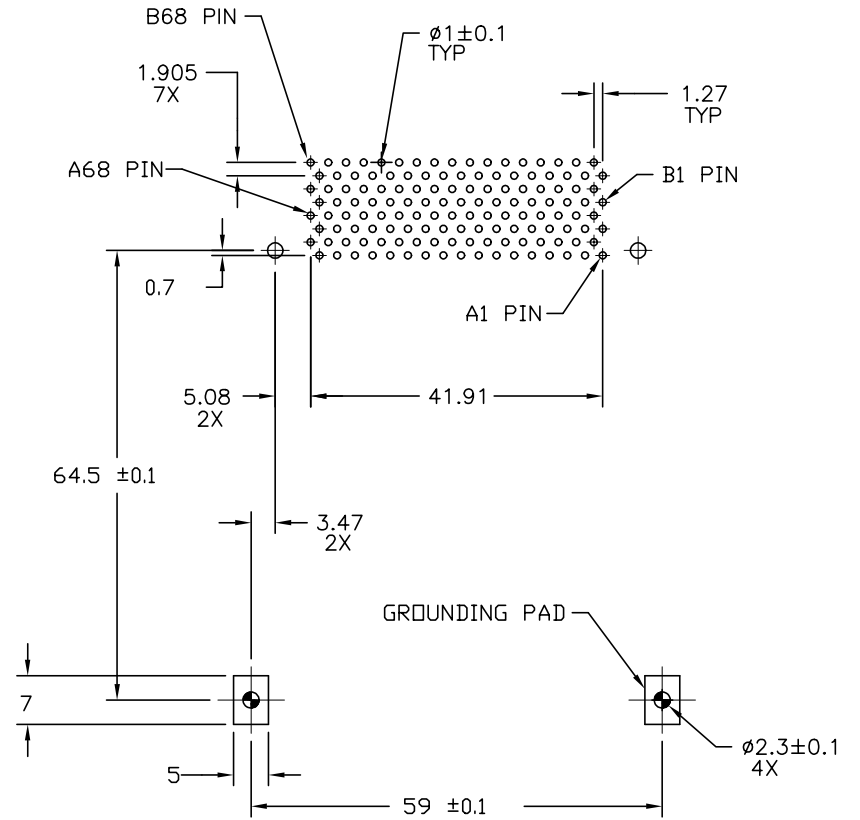

RECOMMENDED P.C.B. LAYOUT
FOR BOTTOM MOUNTED
SCALE 2/1

mat'l. code	surface ISO1302	tolerance ISO406 ISO1101	projection MM	product family PCMCIA
trnecn nodr	date	tolerances unless otherwise specified	scale 2:1	title 68 POSITION DOUBLE DECK TYPE-123 EJECT HEADER
M		angle 0°±2'		dwg no 92821
		dr D.SHEAFFER 06/09/93		sheet 7 of 7
		enr D.BRANN 06/09/93		size A4
		chr D.BRANN 06/09/93		type Product Customer Drawing
		appd D.BRANN 06/09/93		
sheet index	revision sheet			