

## 28701.4 KDS-SR-FB2/A BK

---



Cable entry with injected seal, Mounting type: Screws, Length: 98 mm, Width: 39 mm, IP 66, Colour: Black

**RAL:** 9005

### Business data

---

|  |                 |
|--|-----------------|
| Article number                             | 28701.4         |
| Article name                               | KDS-SR-FB2/A BK |
| GTIN (EAN)                                 | 4044211225483   |
| Packaging unit                             | 10              |
| Quantity unit                              | PC              |
| Weight per piece (not including packaging) | 35.3 g          |
| Weight per piece (including packaging)     | 40.31 g         |
| Unit of weight                             | G               |
| Customs number                             | 39259020        |
| Country of origin                          | DE              |
| Product description                        | Cable Entry     |
| Colour                                     | Black           |

### Technical data

#### Dimensions

|                             |         |
|-----------------------------|---------|
| Length                      | 98 mm   |
| Length of wall cutout       | 68 mm   |
| Width                       | 39 mm   |
| Width of wall cutout        | 24 mm   |
| Height                      | 19 mm   |
| Installation height         | 18.9 mm |
| Diameter of the screw holes | 5.5 mm  |

#### Materials

|                           |               |
|---------------------------|---------------|
| Material                  | Polyamide 6.6 |
| Glass-fibre reinforced    | ✓             |
| Flammability class UL 94  | V-0           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 120 °C        |
| Sealing material          | TPE           |
| Halogen-free              | ✓             |
| Silicone-free             | ✓             |


#### Further technical data

|                             |                          |
|-----------------------------|--------------------------|
| Mounting type               | Screws                   |
| Degree of protection        | IP66                     |
| Number of screw holes       | 2                        |
| Fixing screws               | M 5 (ISO 4762 / DIN 912) |
| Torque of the fixing screws | 3 Nm                     |

#### Environmental Product Compliance

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2023-01-17 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

### Media

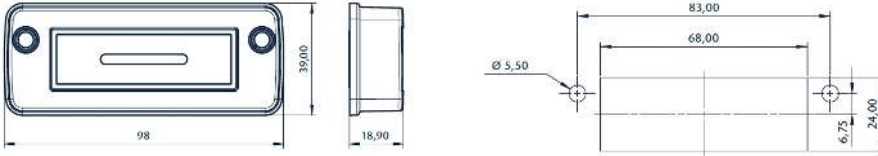

### Accessories

#### Actuating tool



Using the KDS BW1 actuating tool, the seals can be conveniently mounted in and dismantled from the frame. The ergonomic grip and the special shape enable simple and precise installations, especially for cabling applications in confined spaces., Material: Polyamide

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>28622.0</u> | KDS BW 1     | 4044211216597 | 1 ST           |

#### Sheet-metal puncher



Sheet metal puncher for rectangular openings, Dimensions opening: 68 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>28735.0</u> | BL KDS-FB2   | 4044211221812 | 1 ST           |



Sheet metal puncher for rectangular openings, Dimensions opening: 68 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

| Article number | Article name  | GTIN (EAN)    | Packaging unit |
|----------------|---------------|---------------|----------------|
| <u>28741.0</u> | BL-VA KDS-FB2 | 4044211221959 | 1 ST           |

#### Flat cable seals



Seal dummy, Mounting type: Plug in, Length 65.2mm, Width: 20.3 mm, IP 66, Colour: Grey

| Article number | Article name    | GTIN (EAN)    | Packaging unit |
|----------------|-----------------|---------------|----------------|
| <u>28719.6</u> | KDS-DE-FB2/A GR | 4044211221126 | 5 ST           |



Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey

| Article number | Article name    | GTIN (EAN)    | Packaging unit |
|----------------|-----------------|---------------|----------------|
| <u>28720.6</u> | KDS-DE-FB2/B GR | 4044211221133 | 5 ST           |

## 28701.4 KDS-SR-FB2/A BK

### Flat cable seals

Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey



| Article number | Article name    | GTIN (EAN)    | Packaging unit |
|----------------|-----------------|---------------|----------------|
| <u>28721.6</u> | KDS-DE-FB2/C GR | 4044211221140 | 5 ST           |

Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey



| Article number | Article name    | GTIN (EAN)    | Packaging unit |
|----------------|-----------------|---------------|----------------|
| <u>28722.6</u> | KDS-DE-FB2/D GR | 4044211221157 | 5 ST           |

Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey



| Article number | Article name    | GTIN (EAN)    | Packaging unit |
|----------------|-----------------|---------------|----------------|
| <u>28723.6</u> | KDS-DE-FB2/E GR | 4044211221164 | 5 ST           |

Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey



| Article number | Article name    | GTIN (EAN)    | Packaging unit |
|----------------|-----------------|---------------|----------------|
| <u>28724.6</u> | KDS-DE-FB2/F GR | 4044211221171 | 5 ST           |