
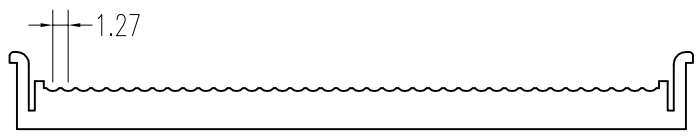

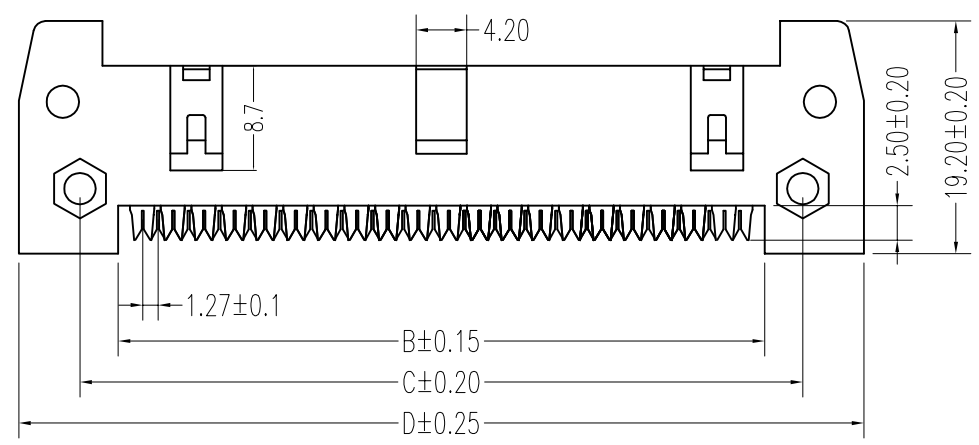


REV.	DESCRIPTION	DATE
A	RELEASE	2019.09.14

MATERIAL&FINISH
 Insulator: PBT Glass Fiber(UL94V-0)
 Contact : Brass
 Contact-Plating: Flash Gold Over Ni

SPECIFICATIONS
 Current Rating :1A AC,DC
 Temperature Range:-40°C To+105°C
 Contact Resistance:20mΩ, MAX
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:500V AC/Min

NO.	Dim. A	Dim. B	Dim. C	Dim. D
10P	10.16	15.36	21.86	31.96
14P	15.24	20.44	26.94	37.04
16P	17.78	22.98	29.48	39.58
20P	22.86	28.06	34.56	44.66
24P	27.94	33.14	39.64	49.74
26P	30.48	35.68	42.18	52.28
30P	35.56	40.76	47.26	57.36
34P	40.64	45.84	52.34	65.55
40P	48.26	53.66	59.96	70.18
50P	60.96	66.36	72.66	82.88
60P	73.66	19.04	85.36	95.58
64P	78.74	84.14	90.44	100.58

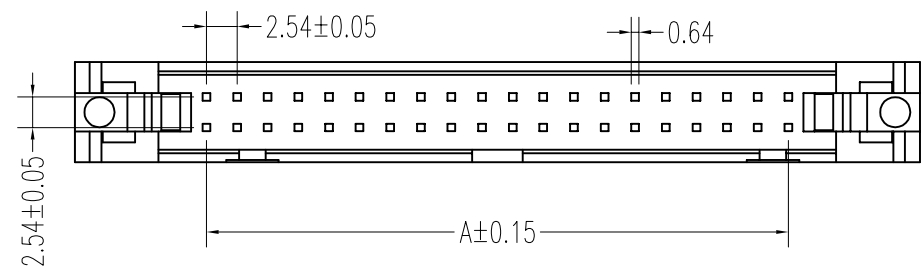

UNLESS TOLERANCE		DRAW BY	zhan	
GENERAL	ANGLE	DESIGN BY	袁刚	
X. ± 0.30	X.' ± 3.0°	CHECK BY		
.X ± 0.25	.X' ± 2.0°	APPROVE BY		
.XX ± 0.20	.XX' ± 1.0°	SCALE	SHEET	UNIT
.XXX ± 0.10	.XXX' ± 0.5°	1:1	1/1	MM

CnC Tech,LLC

Part NO.
3010-XX-041-11-00

DRW NO: _____ REV: A