


MATERIALS AND FINISHES:

SMA PLUG
 BODY, CRIMP TUBE, CENTER CONTACT,
 COUPLING NUT: BRASS
 PLATED GOLD

C'RING: BERYLLIUM COPPER
 PLATED GOLD

INSULATOR: TEFLON

GASKET: SILICONE RUBBER

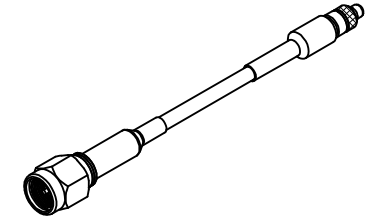

MMCX PLUG
 BODY, CRIMP TUBE, CENTER CONTACT: BRASS
 PLATED GOLD


SNAP RING: BERYLLIUM COPPER
 PLATED GOLD

INSULATOR: TEFLON

CABLE: RG316 OR EQUIVALENT

SHRINK TUBE, VERSAFIT OR EQUIVALENT

PACKAGING: BY POLYBAG

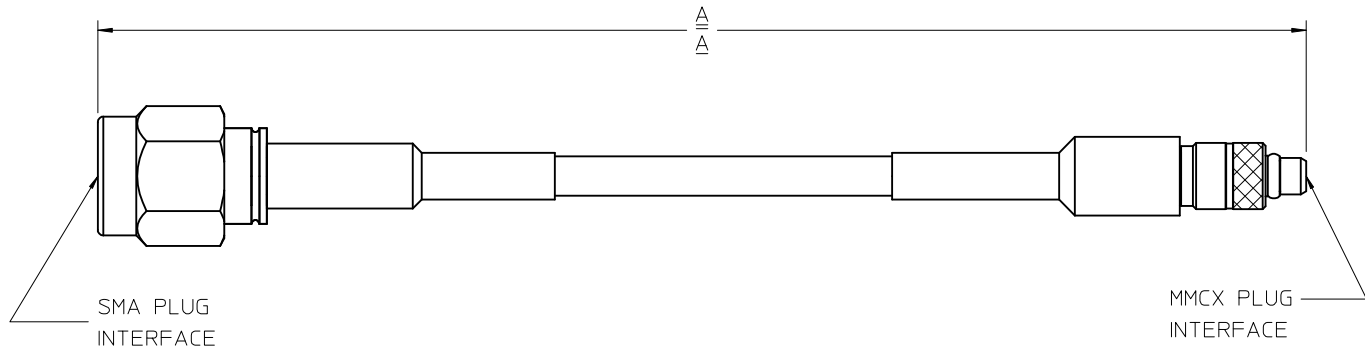

89761-2326	7.874±.236	200.00±6.00
89761-2325	15.748±.394	400.00±10.00
89761-2324	4.724±.157	120.00±4.00
89761-2323	118.110±3.150	3000.00±80.00
89761-2322	78.740±1.969	2000.00±50.00
89761-2321	59.055±.787	1500.00±20.00
89761-2320	39.960±.197	1015.00±5.00
PART NO.	IN	MM
DIM X	A	

CECC 22 340, FIG. 1	MMCX PLUG INTERFACE
MIL-STD-348A, FIG. 310.1	SMA PLUG INTERFACE
SPECIFICATION	DESCRIPTION

CHG:ADD -2326 PER PDR15011854 EC NO: URF2015-0421 DRWN:WEL02 2015/02/05 CHKD: APPR:YCHENG 2015/02/10	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0
REV A4	DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM/IN	SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
4 PLACES ± --- ± ---	DRAWN BY MICHAEL	DATE 2007/01/08	TITLE CA, SMA PLUG STR TO MMCX PLUG STR,WITH RG316 CA-SMA_P/MMCX_P	
3 PLACES ± --- ± ---	CHECKED BY PENNY	DATE 2007/01/08		
2 PLACES ± --- ± ---	APPROVED BY MISEN	DATE 2007/01/08		
1 PLACE ± --- ± ---	ANGULAR ± 2 °		DOCUMENT NO. SD-89761-232	SHEET NO. 1 OF 1
0 PLACE ± ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	