

Product Specification

Patch Antenna JLTD1616-2492S33-25P6-2.5B(DC6)

Feature

High gain , Compact


Pin type

Customization available

Electrical Specification

| | L | S |
|---------------------------------|------------------|------------------|
| Center Frequency | 1615.68± 3.0 MHz | 2491.75± 3.0 MHz |
| Return Loss @ F0 | ≥ 10dB | ≥20dB |
| Bandwidth @ 10dB Return loss | ≥ | ≥ |
| Polarization | Dual Feed | RHCP |
| Gain @ Zenith | - | |
| Ground plane | | 54x54 mm |
| Impedance | | 50 Ω |
| Frequcy Temperature Coefficient | | ±20 ppm/°C |
| Operation Temperature Range | | -40 ~ +85°C |

Mechanical Drawing

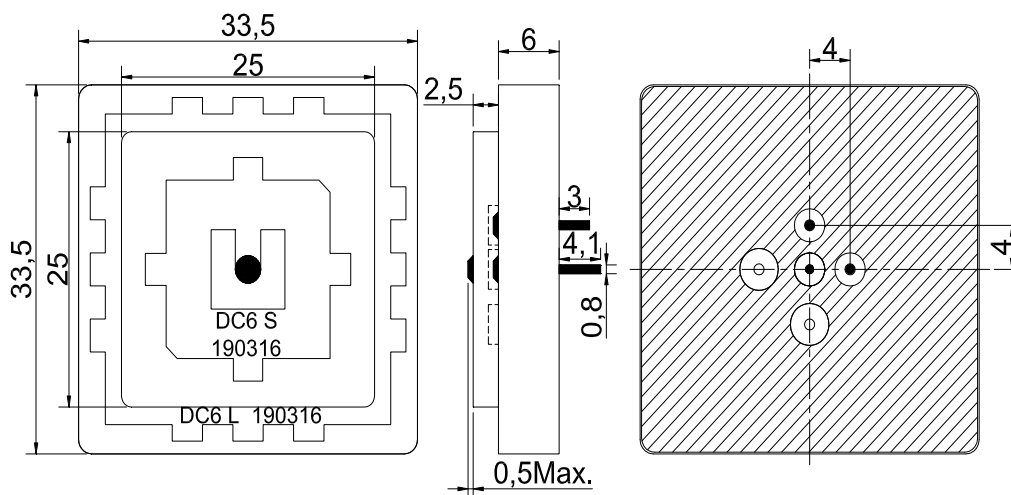

Tolerance:±0.30
Unit: mm

Product Specification

Patch Antenna JLTD1616-2492S33-25P6-2.5B(DC6)

Characteristics

