

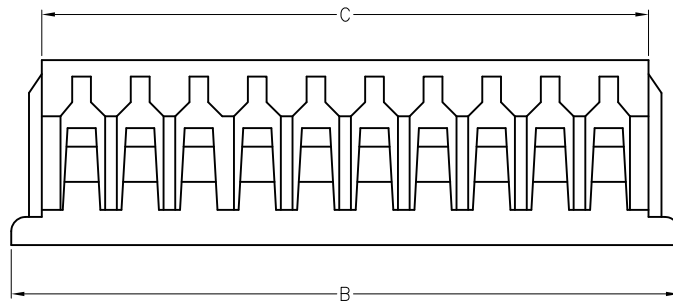

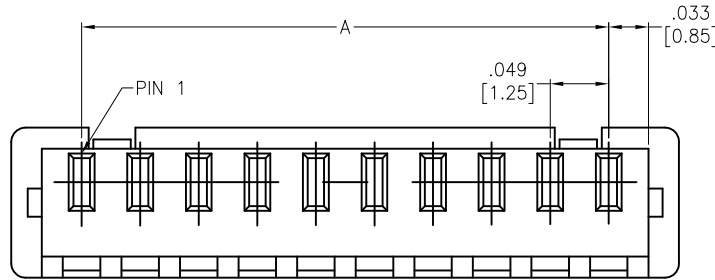



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A		REVISED COLOR	6/21/10	
B		UPDATE DRAWING	10/25/17	AY/NC

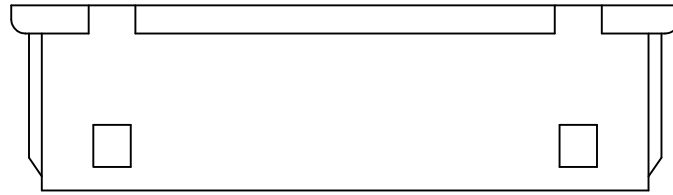

Positions: 02 thru 15
 A= .049 [1.25] x No. of Spaces
 B= .049 [1.25] x No. of Spaces + .118 [3.00]
 C= .049 [1.25] x No. of Spaces + .067 [1.70]

SPECIFICATIONS:
 Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Electrical:
 Voltage rating: 125 VAC/DC
 Current rating: 1 A AC/DC
 Contact resistance: 20 mohms max.
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:
 -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		1.25mm HOUSING	
SIZE	PART NO.	REV.	
X	125CH-B-XX	C	
REF:	S00124T	SCALE:	NTS
		SHEET 1 OF 1	

APPROVALS		DATE
DRAWN	BW	01/17/07
CHECKED		
APPROVED		