

т	۵	п –	т	0



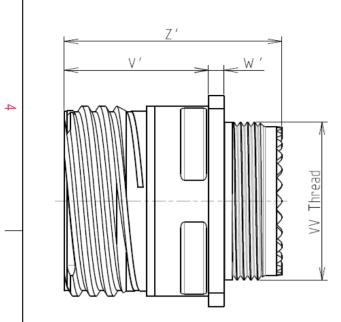



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65℃ to +200℃			
	-Salt Spray	: 2000 hours			
	-Mass	: 9.1 g ± 10%			

8D 0

G

11

Μ

22

А

F

А

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : A


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-22



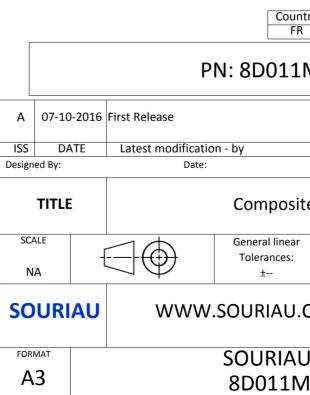

С

	σ		A		
1		•			4
					4
S EXA	MPLE				3
whic er of th	non-conformit h does not con he Parties or b	mply with by a third part	ty		
untry	n, technical no	iction & Cont	rol List]	2
⁻ R 1M	Not Listed				
				MOD N°	
site I	customer drawing te Receptacle 8D series				
ar	NPRDS / PROJECT 859				
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 2AA-C			SHEET 1/2	
	В		А	1	L

		Contact Layout				Panel Cuto
		22*				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(20 0°			2	
_	Ctc	4#22D 11-22 X Y]		<u>v</u>	
	A B C	1.905 1.905 1.905 -1.905 -1.905 -1.905				Dim ØA
ယ	D	-1.905 1.905]			ØAA R1 ØT
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda
N						Coun FR
					A 07-10-2	PN: 8D011
					ISS DATE Designed By:	E Latest modification - by Date:
					SCALE	Composit
					NA	Tolerances:
					SOURIA	
					FORMAT A3	SOURIAL 8D011N
	Н	G	F	E \	D	C

Т

ш

т

G

0

