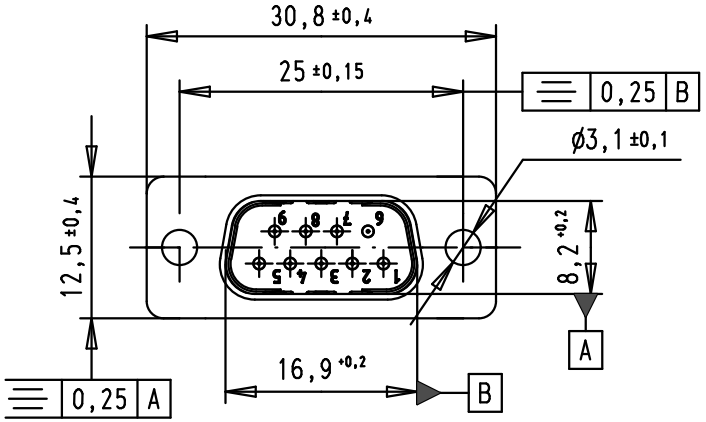

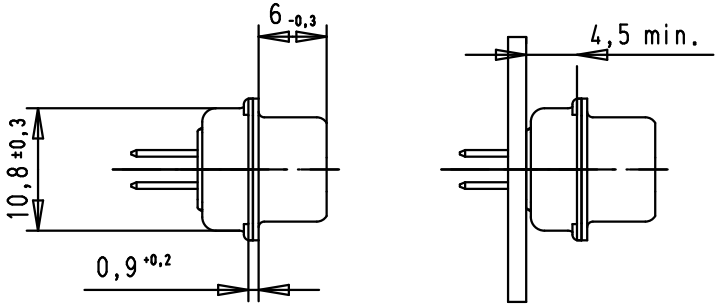

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	–
10	–
50	–
100	–
500	30dB
1000	35dB

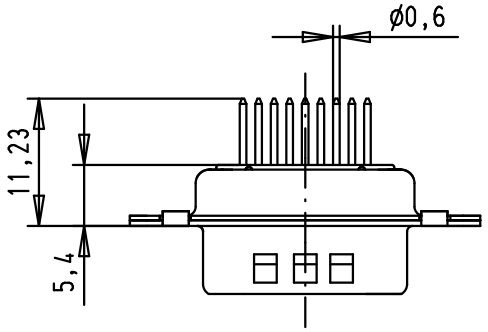

PCB Layout, Component side

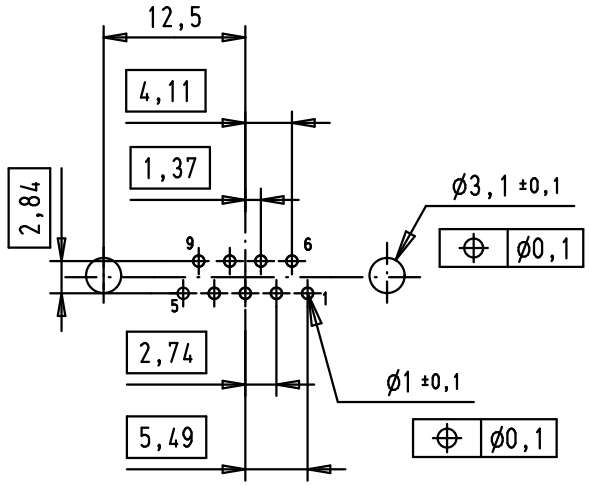

Mod.	Dat.	Name
36283	09/12/11	SD
32802	11/07/05	JMDR
31058	8-JUL-02	CV

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.	09/12/11	JB
Stand.		

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, male, straight, 9 Poles, with turned solder pin, fixing hole

Ma?Mstab/ *Scale* 1.5:1

TB 09641227210

Sub.

Blatt/ *Page* 1/1