


View on mating side

c	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C																	
b																																
a	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A																	
	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1

A = 16 standard contacts L=3
 C = 16 standard contacts L=3
 S = 32 total number of contacts

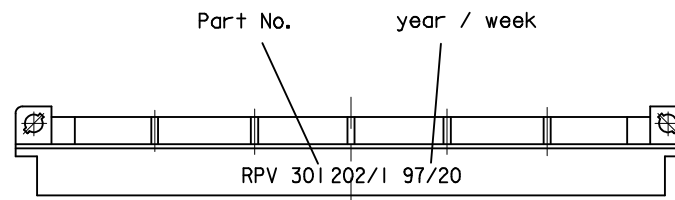

Printing beside row c

Marking	Customer special
Performance level	Customer special
Flux proof	no
Fixing clip	no
Dimensions	SDA-85003-0001 sht.7
Technical Data	PS-85003-0001

C	special	c1+3+5+7....31
A	special	a1+3+5+7....31
Contact symbol	Perform. level	Contact position number

ENTER DESCRIPTION EC NO: I2009-0240 DRWN:PJT 2008/11/28 CHKD:MR HARSHA 2008/11/29 APPR:KPRASAD 2008/11/29	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY	DATE	TITLE 96 POS. MALE DIN CONNECTOR RPV 301 202/1	
		4 PLACES	±---	±---	CA	1997/05/16		
		3 PLACES	±---	±---	CHECKED BY	DATE		
2 PLACES	±---	±---	KN	1997/05/16				
1 PLACE	±---	±---	APPROVED BY	DATE	MOLEX INCORPORATED			
ANGULAR ±---°			JB	1997/05/16				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.	DOCUMENT NO.		SHEET NO.		
			ENTER PART	SDA-85300-0464		1 OF 00		
			SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				