
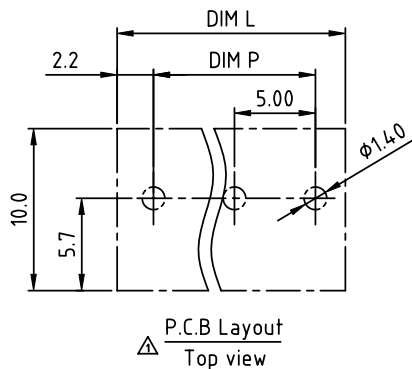
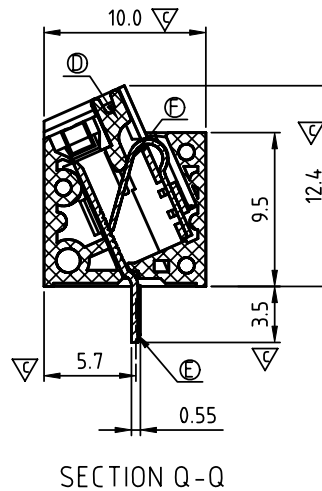


SIGN	DATE	DESCRIPTION	APPROVER
△	08/22'13	Add is cULus // update the drawing	Da cheng
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

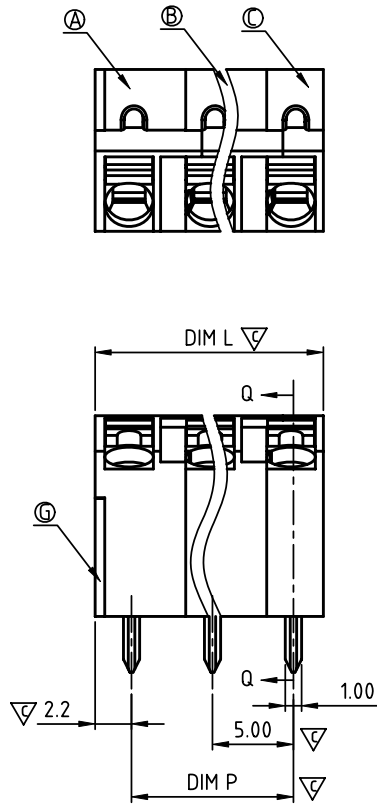

- Material:
- Item ① Terminal with cover of body: Thermoplastic (UL94V-0)
 - Item ② Terminal normal body: Thermoplastic (UL94V-0)
 - Item ③ Terminal side body: Thermoplastic (UL94V-0)
 - △ Item ④ Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
 - Item ⑤ Female Contact : Brass. Tin Plated.
 - Item ⑥ Spring clamp : Stainless steel
 - Item ⑦ Terminal cover: Thermoplastic (UL94V-0)

- Electrical: cULus
- Voltage rating: 300 V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-26
 - Stranded wire(AWG): 16-26
 - Wire strip length: 8-9 mm
 - Withstanding Voltage: 1.6 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C ±5°C/5 Sec
 - △ ● Safety Approval:
 - Critical dimension: ▽

NH xx 7 0 x 0 xxxx G

No. OF POLES: 02: 2 POLES, 24: 24 POLES

△ Body Color:
 0 Black (RAL9005)
 2 Red (RAL3001/D)
 3 Orange(RAL2011/P)
 4 Yellow(RAL1018/A)
 5 Green(RAL6018/T)
 6 Blue (RAL5015/A)
 8 Grey(RAL7004/P)
 9 White(RAL1102)
 C Multiple colors

RoHS compliant (lead<4%)
 In copper Alloy

0000: "Ⓜ" Logo (Standard)
 000A: "ANYTEK" Mark
 Any special item by customer request. please contact sales department.

N = Number of poles

$$\text{DimL} = (N-1) \times 5.0 + 4.1$$

$$\text{DimP} = (N-1) \times 5.0$$

POLES	DIM L	DIM P
2p-6p	±0.1	±0.1
7p-12p	±0.2	±0.2
13p-18p	±0.3	±0.3
19p-24p	±0.4	±0.4

ANYTEK				CUSTOMER COPY			
<small>ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD</small>							
TITLE		NH 5.0mm Series		DWG NO.		8NH0002	
PART NO.		NHxx70x0xxxxG		DWG NO.		8NH0002	
APPROVED		DESIGNED	DRAWN	CUST NO.		Tolerance	
		Da cheng 2013.08.22	Da cheng 2013.08.22			X. ±0.50	
				SHEET: 01/01		X.X ±0.30	
						X.XX ±0.10	
						X° ±1°	